

butech



**professional
book**

PORCELANOSA Grupo



PORCELANOSA Grupo

Trusted professional solutions

BUTECH is part of Grupo PORCELANOSA, a world leader in the design and production of superior quality ceramics. Following on from adhesives and sealing materials for ceramics, BUTECH has evolved to more complex installation systems such as façades and technical flooring.

BUTECH's main aim is to provide PORCELANOSA customers with materials and installation systems which enable successful installation of any type of ceramic flooring or cladding.

BUTECH knows what every kind of ceramics needs and offers technical as well as decorative solutions which allow its installation with total success guarantee.

Spirit of innovation

BUTECH has invested in the latest technology to develop technical solutions which facilitate the commissioning and delivery of even better designs using PORCELANOSA ceramics.

Over the last few years, BUTECH has introduced innovative installation materials, decorative profiles, shower tray and levelling systems which have become an industry standard. Moreover, BUTECH is a leading company in innovation and development of façade systems for the various cladding materials from Grupo PORCELANOSA: STON-KER, PAR-KER, URBATEK, XLIGHT, XTONE, NATURAL STONE AND KRION.

butech




Corporate Social Responsibility

At butech, we only consume electricity from guaranteed renewable sources. We generate 30% of the energy we use at Porcelanosa Group ourselves. Over 90% of the lighting in our premises is high-performance, low-consumption led lighting. Half of our indoor surface area receives natural light, which reduces electricity consumption.

More than 95% of the waste generated by Porcelanosa is reused, recycled or repurposed. We have reduced water consumption in our tile manufacturing processes by 20%. We minimize water and gas use by dry pressing our ceramics. 100% of the wastewater is purified and reused, producing 0 litres of discharge. We calculate and reduce our carbon footprint every year, ensuring our commitment as a circular economy.

Environmental commitment

The environmental commitment butech has shown toward its immediate surroundings and the environment as a whole has characterized the company since its origins is clearly reflected by environmental ideas and initiatives, including substantial yearly investment into systems for recycling water, waste reuse, environmental protection and energy saving and it is a ISO 14001 certified environmental management system.

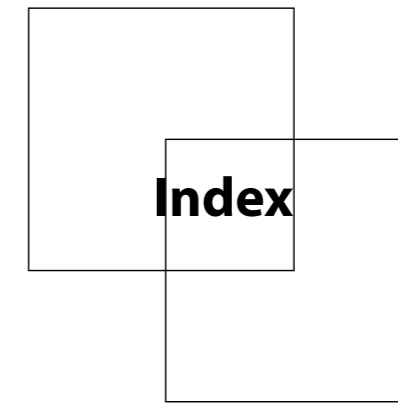

Index

8

PROFILES AND SKIRTINGS

114

ADHESIVES

140

**GROUTING MATERIAL AND
ELASTIC JOINT SEALANTS**

160

**SUBSTRATE PREPARATION
PRODUCTS**

170

**SHOWER TRAYS AND
WATERPROOFING**

202

SISTEMAS

PROFILES AND SKIRTINGS

LED PROFILES

pro-light 7.5, **13** | pro-light 11, **14** | pro-corner light, **16** | pro-part light, **18**
 pro-mate 45 TOP light, **20** | pro-skirting LED, **22**
 COB LED strip, **24** | LED transformer, **24**

DECORATIVE PROFILES

CRYSTAL COLLECTION, **28**

pro-part Li crystal SW galaxy, **28** | pro-part Li crystal rock SW silver, **28**
 pro-part Li crystal sand SW gold, **30** | pro-part Li crystal sand SW silver, **30**
 pro-part crystal SW gold, **32** | pro-part crystal SW silver, **32**

GOLD COLLECTION, **34**

pro-part Li gold, **34** | pro-part gold, **34**
 pro-mate 5 gold, **34** | pro-part antique gold, **36**

TEXTURE COLLECTION, **40**

pro-part bone, **40** | pro-part coal, **42** | pro-part cast iron, **44**
 pro-part cast copper, **46** | pro-part cement, **48** | pro-part sand, **50**

METAL COLLECTION, **52**

pro-part anthracite, **52** | pro-part old iron, **54** | pro-part old bronze, **56**
 pro-part rose, **58** | pro-part rose line, **58** | pro-part moon, **60** | pro-part moon line, **60**
 pro-part graphite matt, **62** | pro-part graphite matt line, **62** | pro-part graphite, **64**
 pro-part line, **66** | pro-part line matt, **66**

CHROME COLLECTION, **68**

pro-part chrome, **68** | pro-mate 5 chrome, **68** | pro-mate 3 chrome, **68**
 pro-part Li chrome, **69** | pro-mate 45 TOP chrome, **69** | pro-mate 45 chrome, **69**

PRO-TELO COLLECTION, **73**

pro-telo inox 8x40, **73** | pro-telo inox 8x25, **73**
 pro-telo aluminium 8x10, **73** | pro-telo recto 8x10, **73**

CORNER PROFILES AND TRIMS FOR WALL TILES

pro-mate 2, **76** | pro-mate 3, **77** | pro-mate 5, **78** | pro-part Li, **79**
 pro-part, **80** | pro-mate 45, **82** | pro-corner, **83** | 3 metres profiles, **84**

TECHNICAL PROFILES

pro-T, **88** | pro-level, **89** | pro-shower, **90** | pro-sanit, **91**
 pro-dilata, **92** | structural joints, **94** | pro-step, **95**

SKIRTINGS

pro-skirting, **99** | pro-skirting customized, **101**
 pro-skirting PAR-KER, **103** | pro-plint, **113**






LED PROFILES

LED PROFILES


Decorative profile. Luminescent range for ceramic coverings.



pro-light silver 7.5 mm

pro-light 7.5 mm

Anodized aluminium

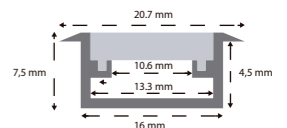

pro-light black
21x7.5x2500 mm

100243703
94.18 p/u



pro-light silver
21x7.5x2500 mm

100243677
90.18 p/u

Lighting system not included. Includes profile, diffuser and corner.


Luminescent range for ceramic coverings.



pro-light silver 11 mm

pro-light 11 mm

Anodized aluminium

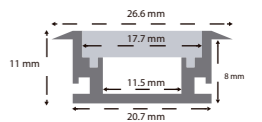

pro-light silver 11mm
27x11x2500 mm

100202237
79.59 p/u


Lighting system not included. Includes profile, diffuser and corner.

LED PROFILES

Decorative profile. Luminescent range for ceramic coverings.



pro-corner light



pro-corner light

Anodized aluminium




pro-corner light
16x16x2500 mm

100243678
90.18 p/u

Lighting system not included. Includes profile, diffuser and corner.

LED PROFILES


Decorative profile. Luminescent range for ceramic coverings.



pro-telo light

pro-telo light

Anodized aluminium



pro-telo light black
15x12x3000 mm

100281601
82.49 p/u




pro-telo light silver
15x12x3000 mm

100281600
73.77 p/u

Lighting system not included. Includes profile, diffuser and corner.

LED PROFILES


Decorative profile. Luminescent range for ceramic coverings.

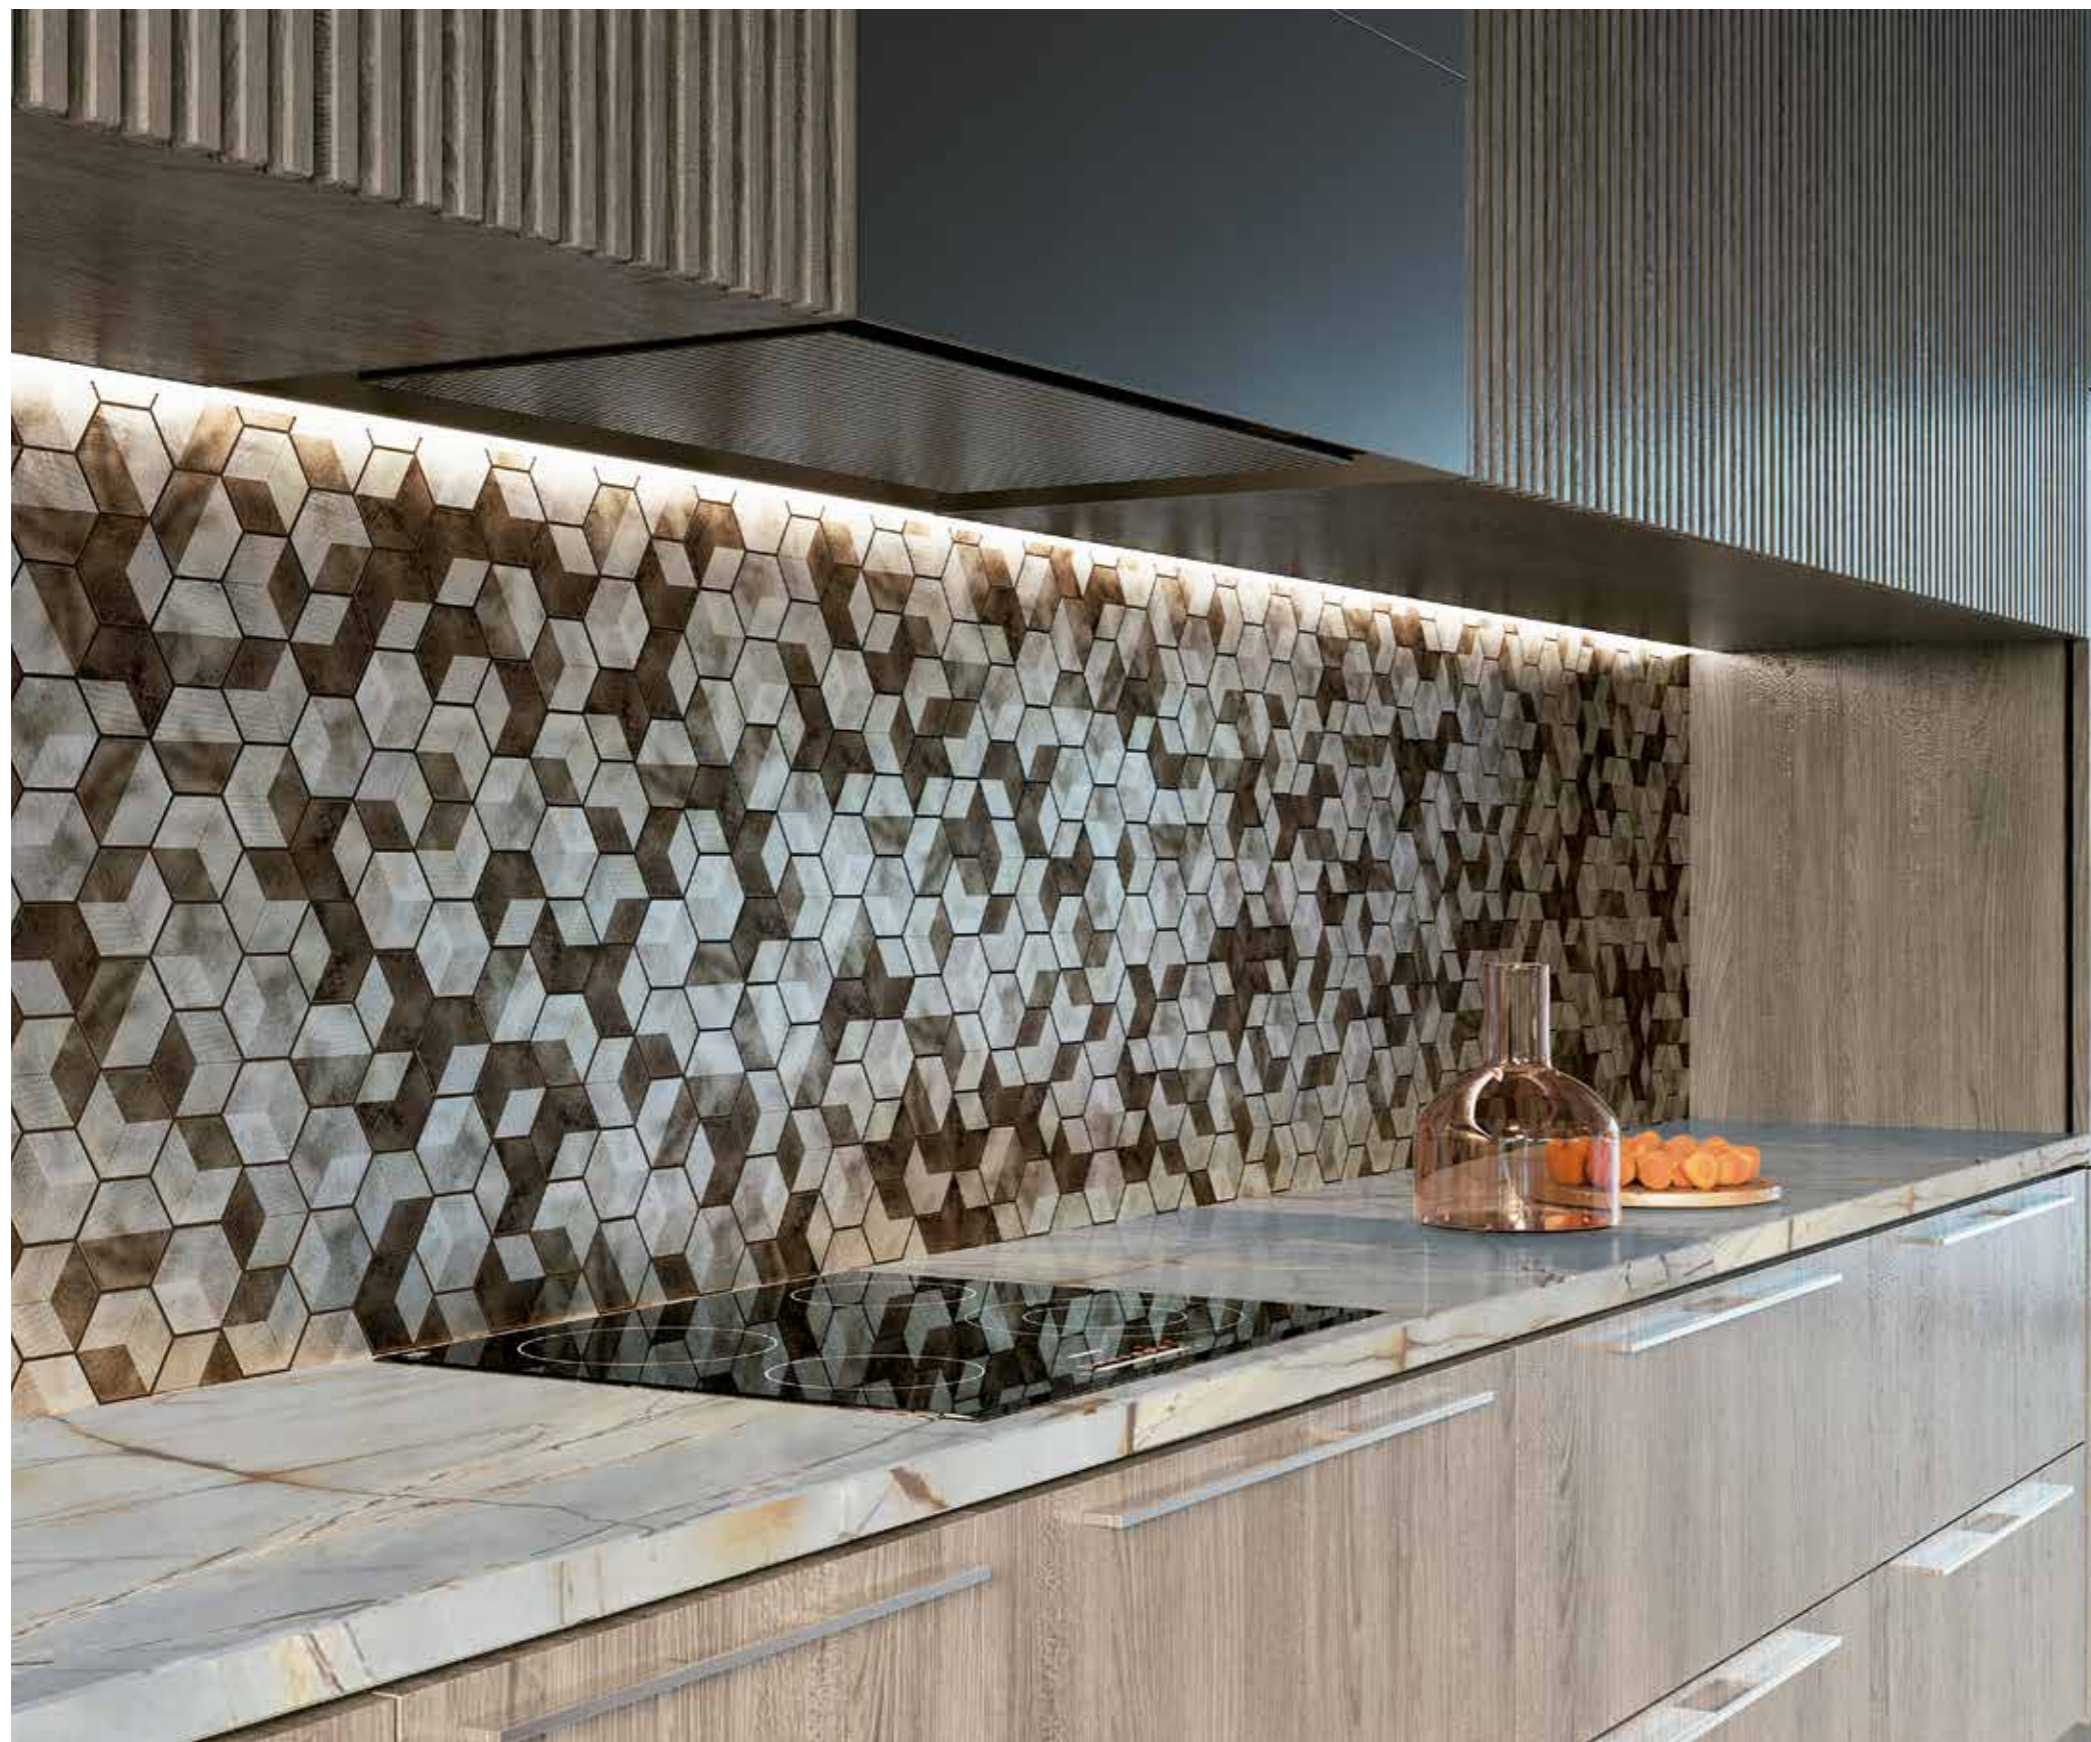

pro-mate 45 TOP light

pro-mate 45 TOP light

Anodized aluminium





pro-mate 45 TOP light
22.5x22.5x2500 mm

100243649
103.89 p/u

Lighting system not included. Includes profile, diffuser and corner.

Decorative profile. Luminescent range for ceramic coverings.

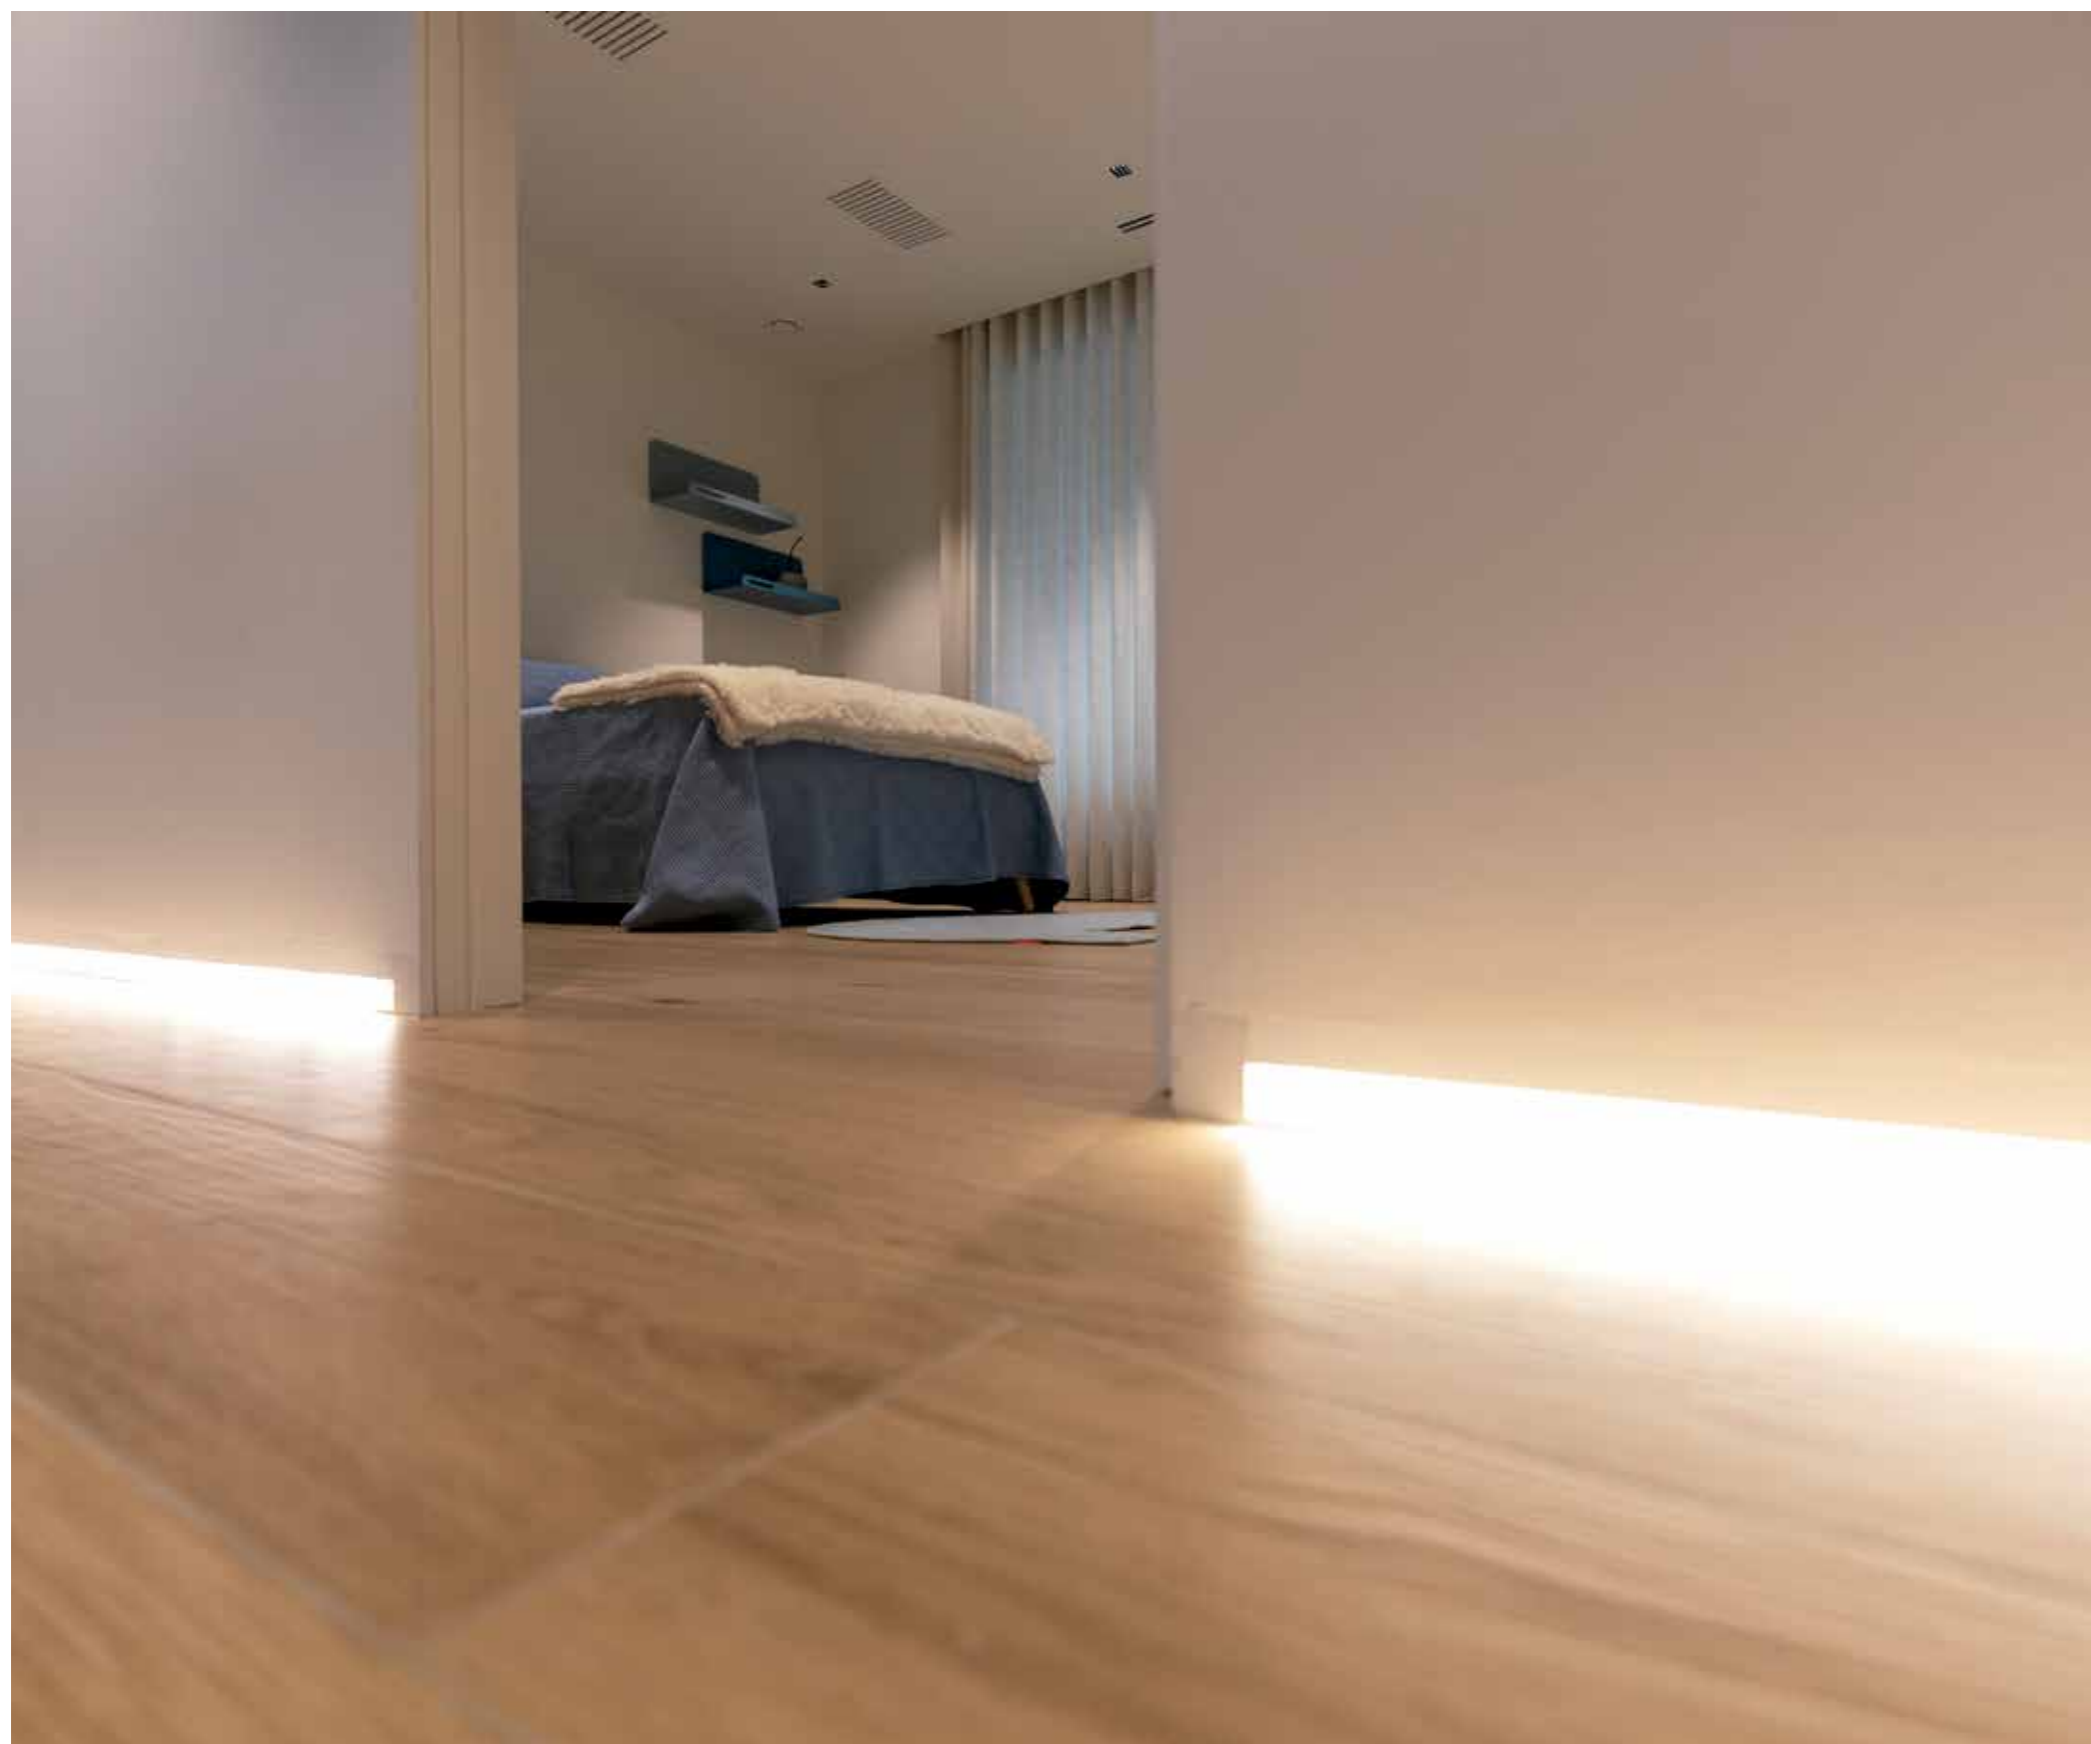


pro-skirting LED white

pro-skirting LED


Anodized aluminium



pro-skirting LED black 13x60x2500 mm	100200414 33.84 p/u
pro-skirting LED corner black 13x60x5 mm	100213201 12.38 p/u

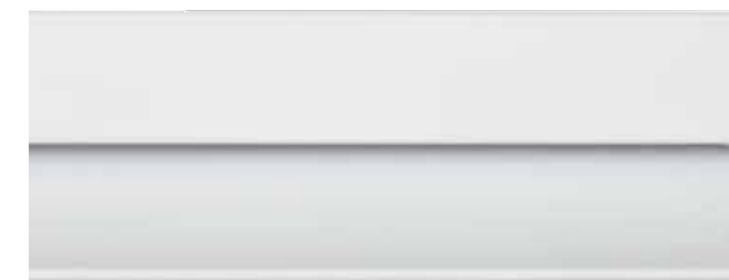


pro-skirting LED white 13x60x2500 mm	100200418 31.94 p/u
pro-skirting LED corner white 13x60x5 mm	100213220 12.38 p/u

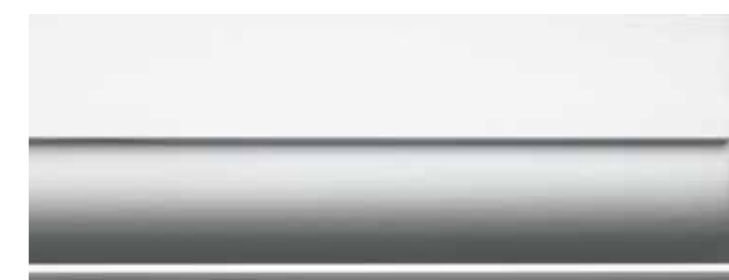

pro-skirting LED silver 13x60x2500 mm	100200403 33.84 p/u
pro-skirting LED corner silver 13x60x5 mm	100213154 11.05 p/u

complements	
diffuser pro-skirting LED 2500 mm	100232655 16.52 p/u
fixing clips pro-skirting LED 17x30 mm 50 ud	100193608 15.80 p/bag

Diffuser and lighting system not included.
Caps are supplied separately.

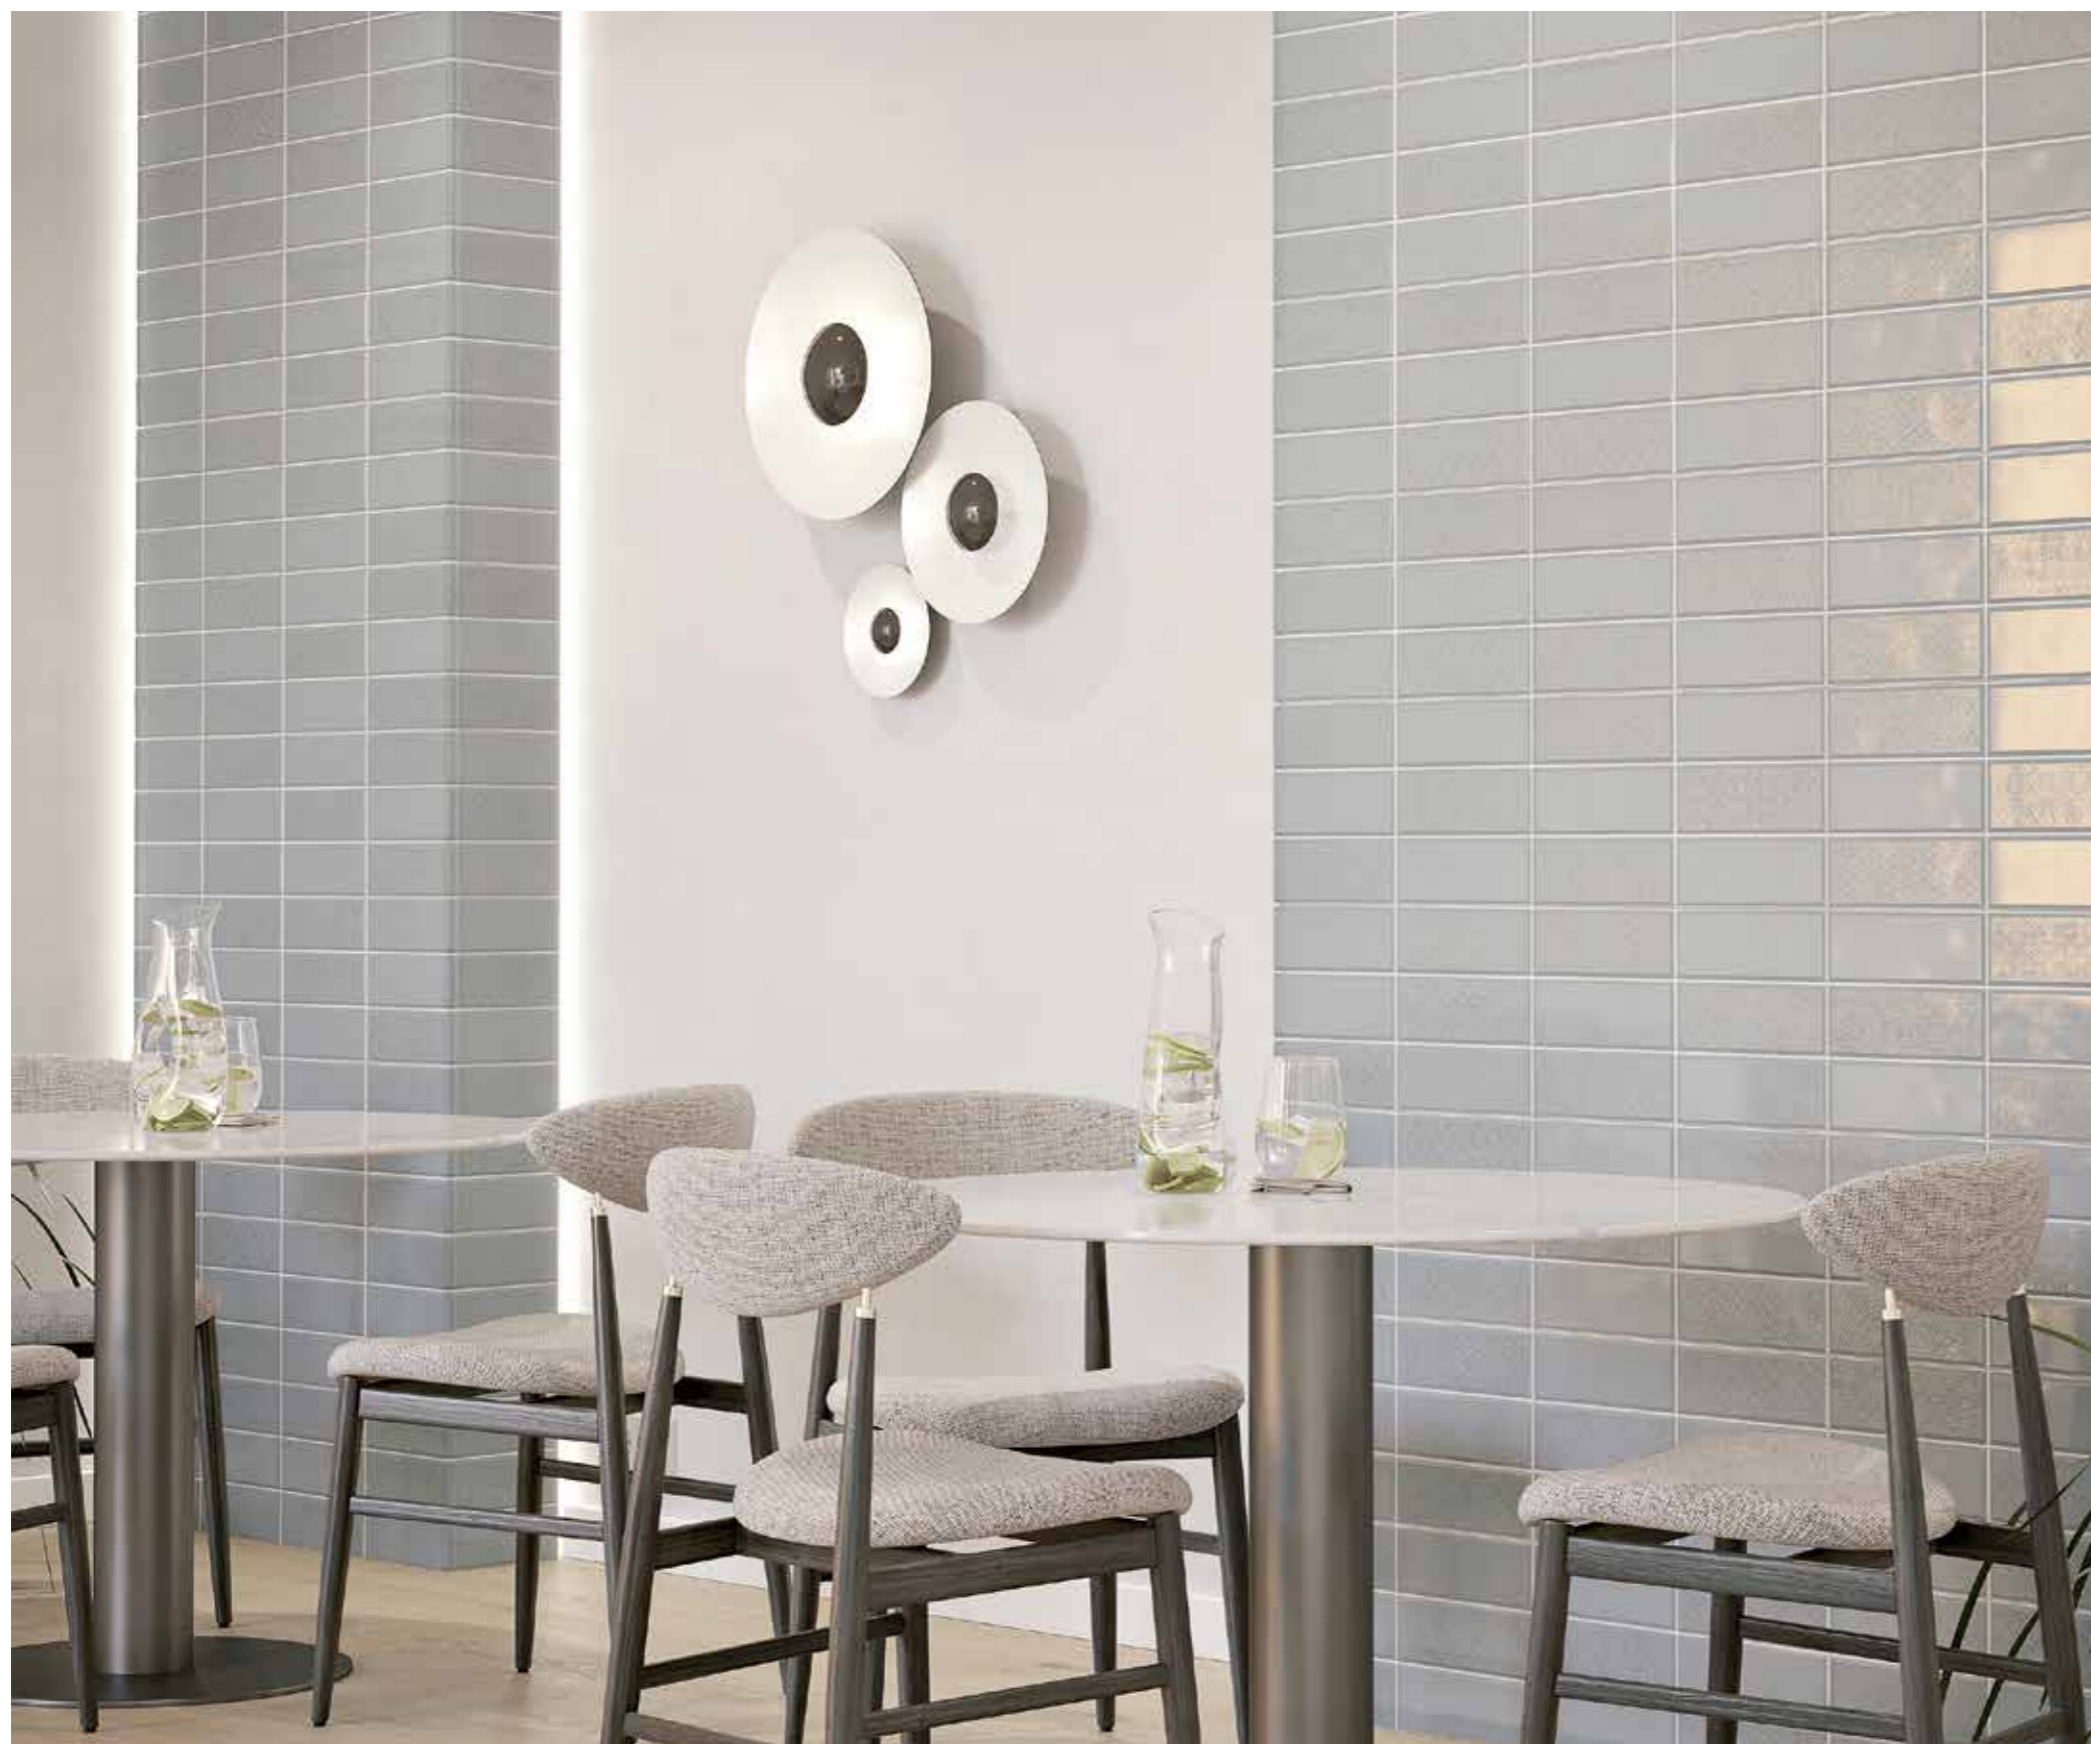

pro-light silver 11 mm

COB LED strip

Linear lighting system for profiles from the pro-light collection.

COB LED luminaires are packages of multiple LEDs that are joined together into a single lighting module. In practice, only one point of light is seen, but with a higher light output. That is, with the same power as an SMD, more lumens / watt are achieved.

COB LED strip IP20

COB LED strip IP20 3000°K 2x10x2500 mm	100298585 87.62 p/u
COB LED strip IP20 4000°K 2x10x2500 mm	100298526 87.62 p/u
COB LED strip IP20 6500°K 2x10x2500 mm	100298597 87.62 p/u

Power	15 W/m	Lumens 3.000°K	1400 Lm/m*
Voltage	24 V	Lumens 4.000°K	1500 Lm/m*
N° chips/m	480	Lumens 6.500°K	1530 Lm/m*
PCB	10 mm	Light emission	180°

IP20: For use in dry environments. Interior flooring and coverings.

COB LED strip IP67

COB LED strip IP67 3000°K 4,6x11,6x2500 mm	100298620 112.99 p/u
COB LED strip IP67 4000°K 4,6x11,6x2500 mm	100298587 112.99 p/u
COB LED strip IP67 6500°K 4,6x11,6x2500 mm	100298621 112.99 p/u

Power	15 W/m	Lumens 3.000°K	1205 Lm/m*
Voltage	24 V	Lumens 4.000°K	1216 Lm/m*
N° chips/m	480	Lumens 6.500°K	1210 Lm/m*
PCB	11,6 mm	Light emission	180°

IP67: For use in wet environments. Interior flooring and coverings and exterior coverings.

LED transformer

Transf. pro-light 100W 24V 0-5 mts 190x52x39 mm	100200310 99.43 p/u
---	--------------------------------------

Power	100 W
Voltage	24 V
Electric current	4.2 A
Maximum length of led strip	5 m


* The light output (Lumens) of COB LED strips may vary slightly from one strip to another.



DECORATIVE PROFILES

CRYSTAL COLLECTION

High-end decorative profile for ceramic wall tiling, made with Swarovski crystals.
Replaces the traditional decorative ceramic listellos by new design metallic lines.

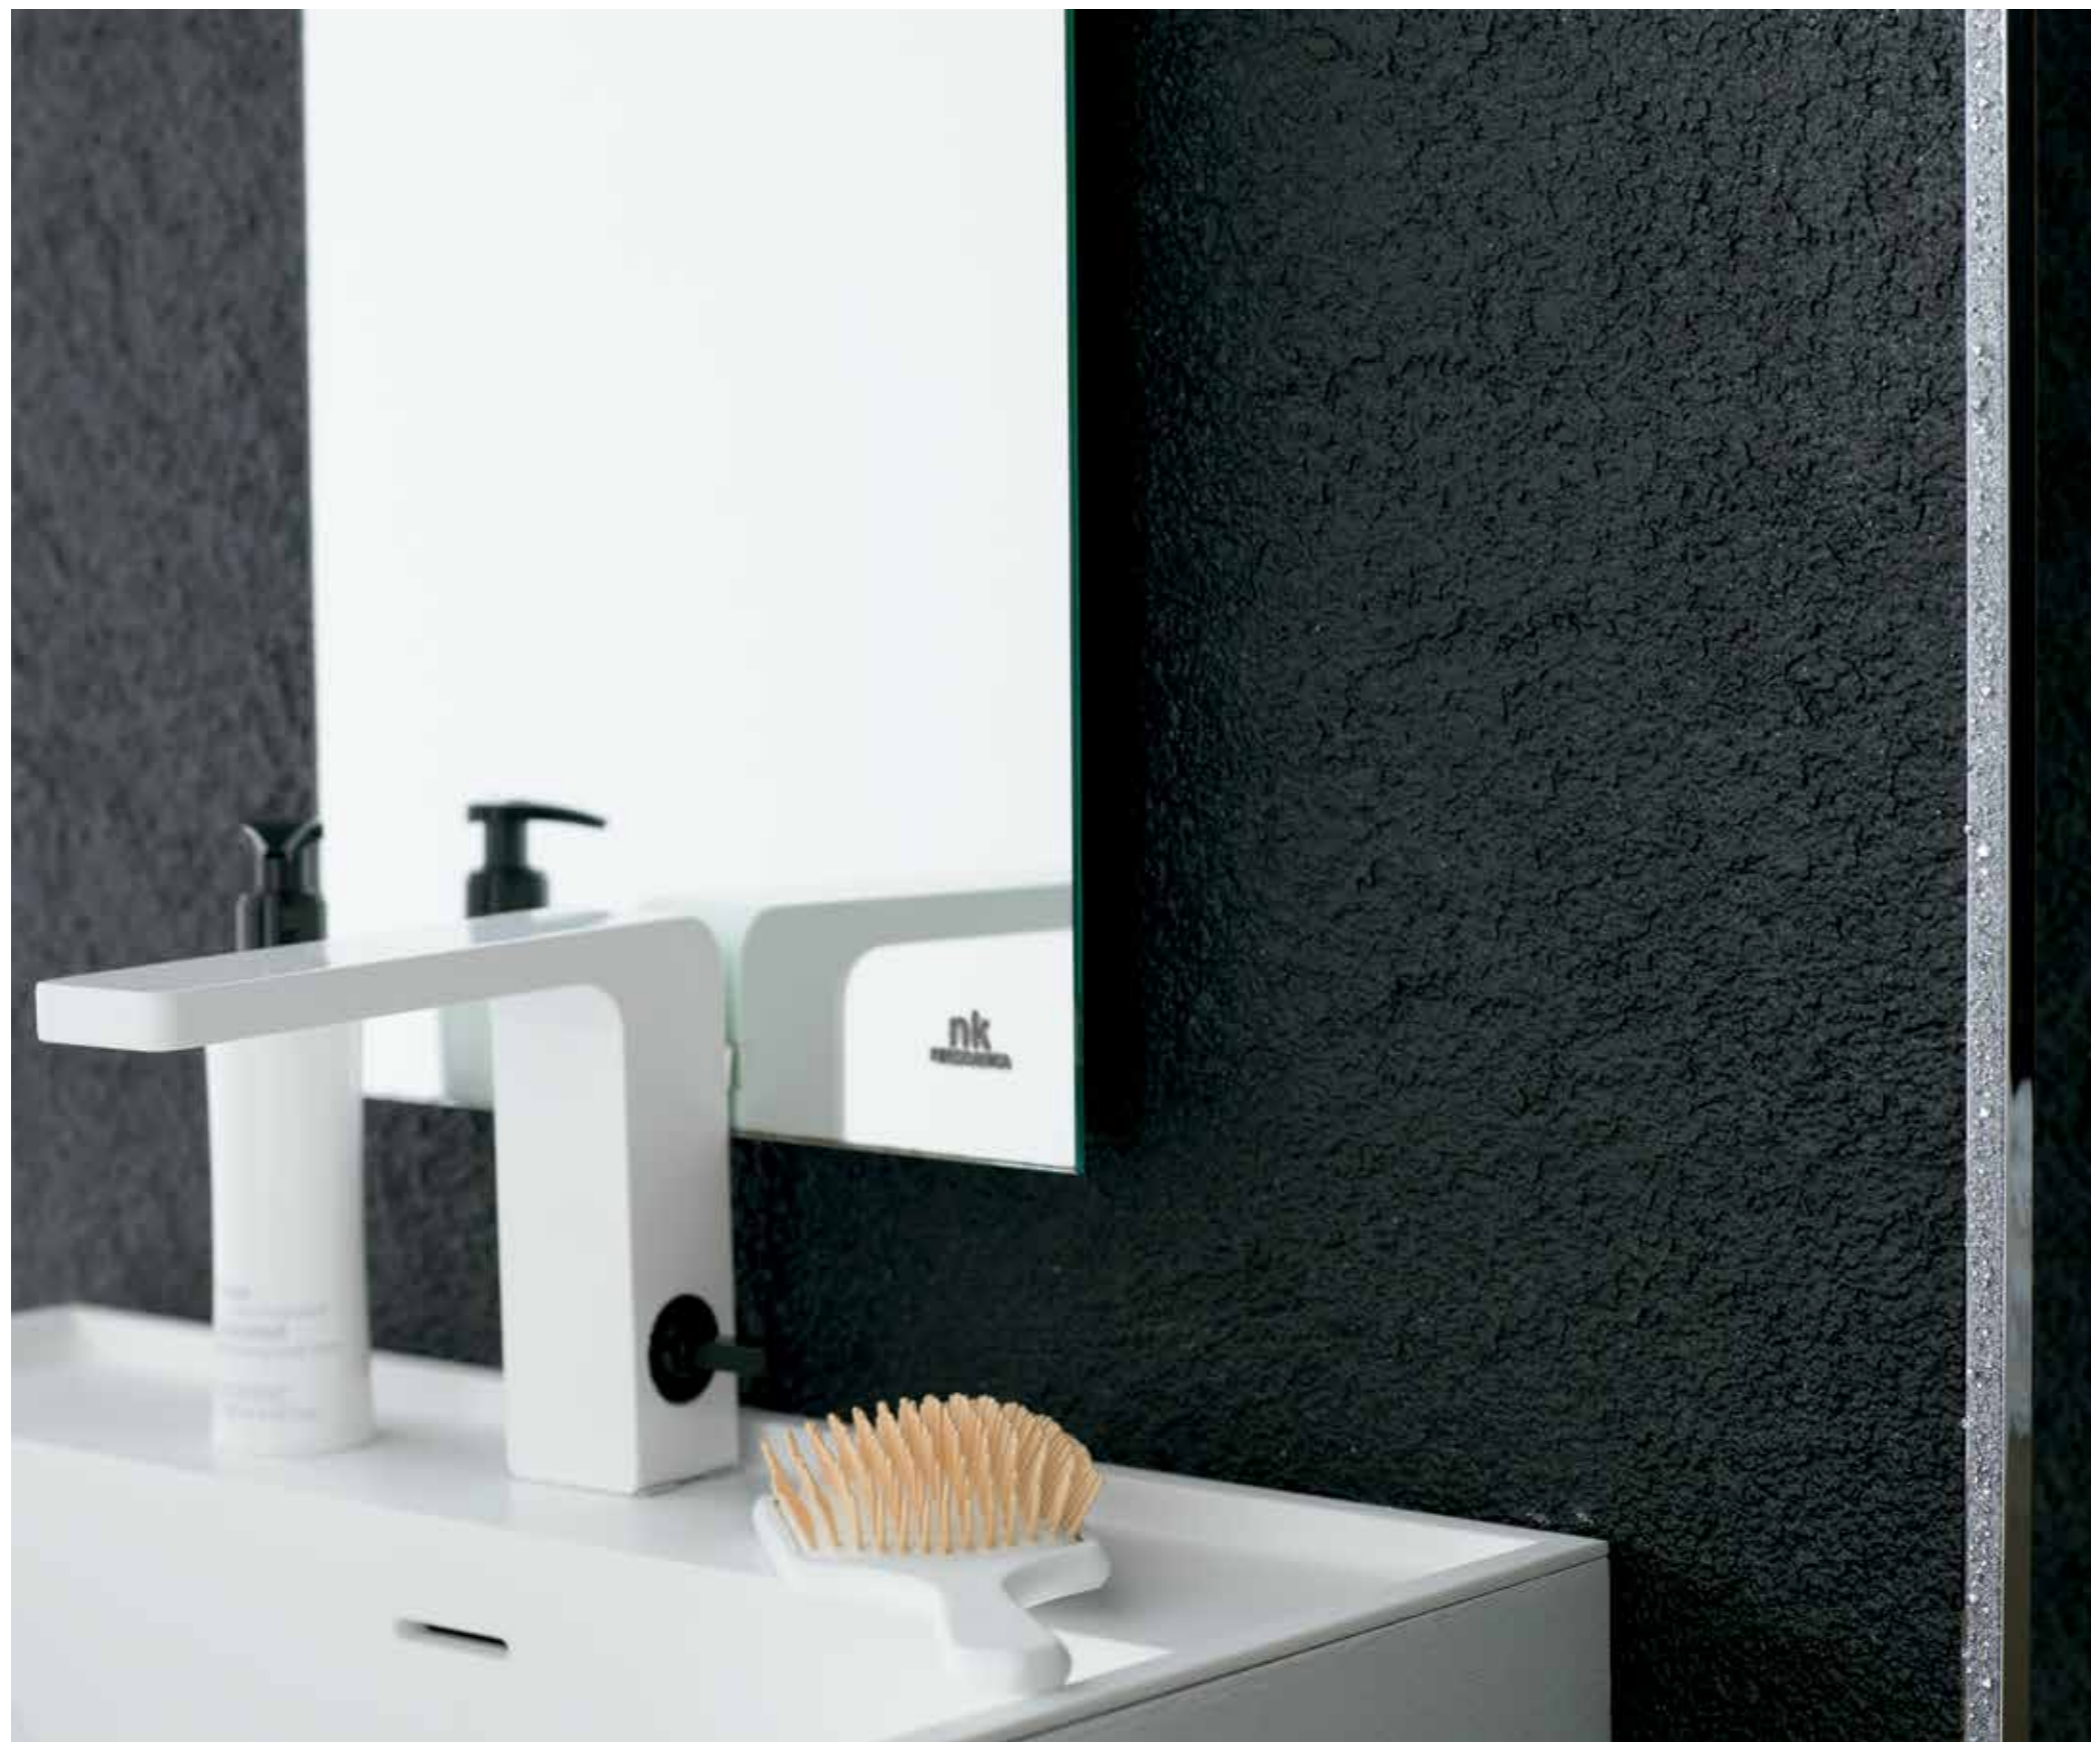

pro-part Li crystal SW galaxy

Not recommended for walls in direct contact with water.

pro-part Li crystal SW galaxy

Chromed brass profile. Made with Swarovski Elements



pro-part Li crystal galaxy 11 mm
12x11x2500 mm

100171653
497.27 p/u

pro-part Li crystal rock SW silver

Chromed brass profile. Made with Swarovski Elements



pro-part Li Crystal rock SW silver 11mm
12x11x2500 mm

100130429
592.20 p/u

CRYSTAL COLLECTION

High-end decorative profile for ceramic wall tiling, made with Swarovski crystals.
Replaces the traditional decorative ceramic listellos by new design metallic lines.



pro-part Li Crystal sand SW silver

Not recommended for walls in direct contact with water.

pro-part Li Crystal sand SW Gold

24 k Gold plated. Made with Swarovski Elements



pro-part Li crystal sand SW Gold 11mm
12x11x2500 mm

100130430
484.04 p/u

pro-part Li Crystal sand SW Silver

Chromed brass profile. Made with Swarovski Elements



pro-part Li crystal sand SW silver 11mm
12x11x2500 mm

100130431
412.64 p/u

CRYSTAL COLLECTION

High-end decorative profile for ceramic wall tiling, made with Swarovski crystals.
Replaces the traditional decorative ceramic listellos by new design metallic lines.



pro-part crystal SW silver

Not recommended for walls in direct contact with water.

pro-part crystal SW gold

24 k Gold plated. Made with Swarovski Elements



pro-part crystal SW gold 11mm
8x11x2500 mm

100155354
849.69 p/u

pro-part crystal SW silver

Chromed brass profile. Made with Swarovski Elements




pro-part crystal SW silver 11mm
8x11x2500 mm

100155356
699.28 p/u

GOLD COLLECTION

High-end decorative profile for wall tiles, 24K Gold plated.
It substitutes the traditional ceramic frieze by a metallic line with an exclusive design.



pro-part gold

pro-part Li gold

24 carat Gold plated profile. 12 and 13,5 mm decorative trim.



pro-part Li gold 12,5mm 13,5x12,5x2500 mm	100100762 156.59 p/u
pro-part Li gold 11mm 12x11x2500 mm	100100726 150.68 p/u

pro-part gold

24 carat Gold plated profile. 8 mm decorative trim.



pro-part gold 12.5mm 8x12,5x2500 mm	100100725 144.28 p/u
pro-part gold 11mm 8x11x2500 mm	100100724 134.21 p/u
pro-part gold 7mm 8x7x2500 mm	100246452 147.43 p/u

pro-mate 5 gold


24 carat Gold plated profile. 5 mm decorative trim.



pro-mate 5 gold 12.5mm 5x12,5x2500 mm	100100722 126.87 p/u
pro-mate 5 gold 11mm 5x11x2500 m	100100721 125.25 p/u

GOLD COLLECTION

High-end decorative profile for wall tiles.
It substitutes the traditional ceramic frieze by a metallic line with an exclusive design.



pro-part gold antique

pro-part antique gold

Brushed gold finishes profile. 8 mm decorative trim.



pro-part antique gold
8x11x2500 mm

100314848
105.34 p/u



Matte metallic finish decorative profiles for ceramic wall tiles. It substitutes the traditional ceramic frieze.



pro-part bone

pro-part bone

Brass profile with matte metallic covering. 8 mm decorative trim.



pro-part bone 7mm 8x7x2500 mm	100278708 87.05 p/u
pro-part bone 11mm 8x11x2500 mm	100269007 92.70 p/u
pro-part bone 12,5mm 8x12,5x2500 mm	100278730 91.61 p/u

Matte metallic finish decorative profiles for ceramic wall tiles. It substitutes the traditional ceramic frieze.



pro-part coal

pro-part coal

Brass profile with matte metallic covering. 8 mm decorative trim.



pro-part coal 7mm 8x7x2500 mm	100278697 87.05 p/u
pro-part coal 11mm 8x11x2500 mm	100269081 92.70 p/u
pro-part coal 12,5mm 8x12,5x2500 mm	100278751 91.61 p/u

Matte metallic finish decorative profiles for ceramic wall tiles. It substitutes the traditional ceramic frieze.



pro-part cast iron

pro-part cast iron

Brass profile with matte metallic covering. 8 mm decorative trim.



pro-part cast iron 7mm 8x7x2500 mm	100285068 68.18 p/u
pro-part cast iron 11mm 8x11x2500 mm	100222994 92.80 p/u
pro-part cast iron 12,5mm 8x12,5x2500 mm	100278717 91.61 p/u

Matte metallic finish decorative profiles for ceramic wall tiles. It substitutes the traditional ceramic frieze.



pro-part cast copper

pro-part cast copper


Brass profile with matte metallic covering. 8 mm decorative trim.



pro-part cast copper 11mm
8x11x2500 mm

100223015
92.80 p/u

Matte metallic finish decorative profiles for ceramic wall tiles. It substitutes the traditional ceramic frieze.

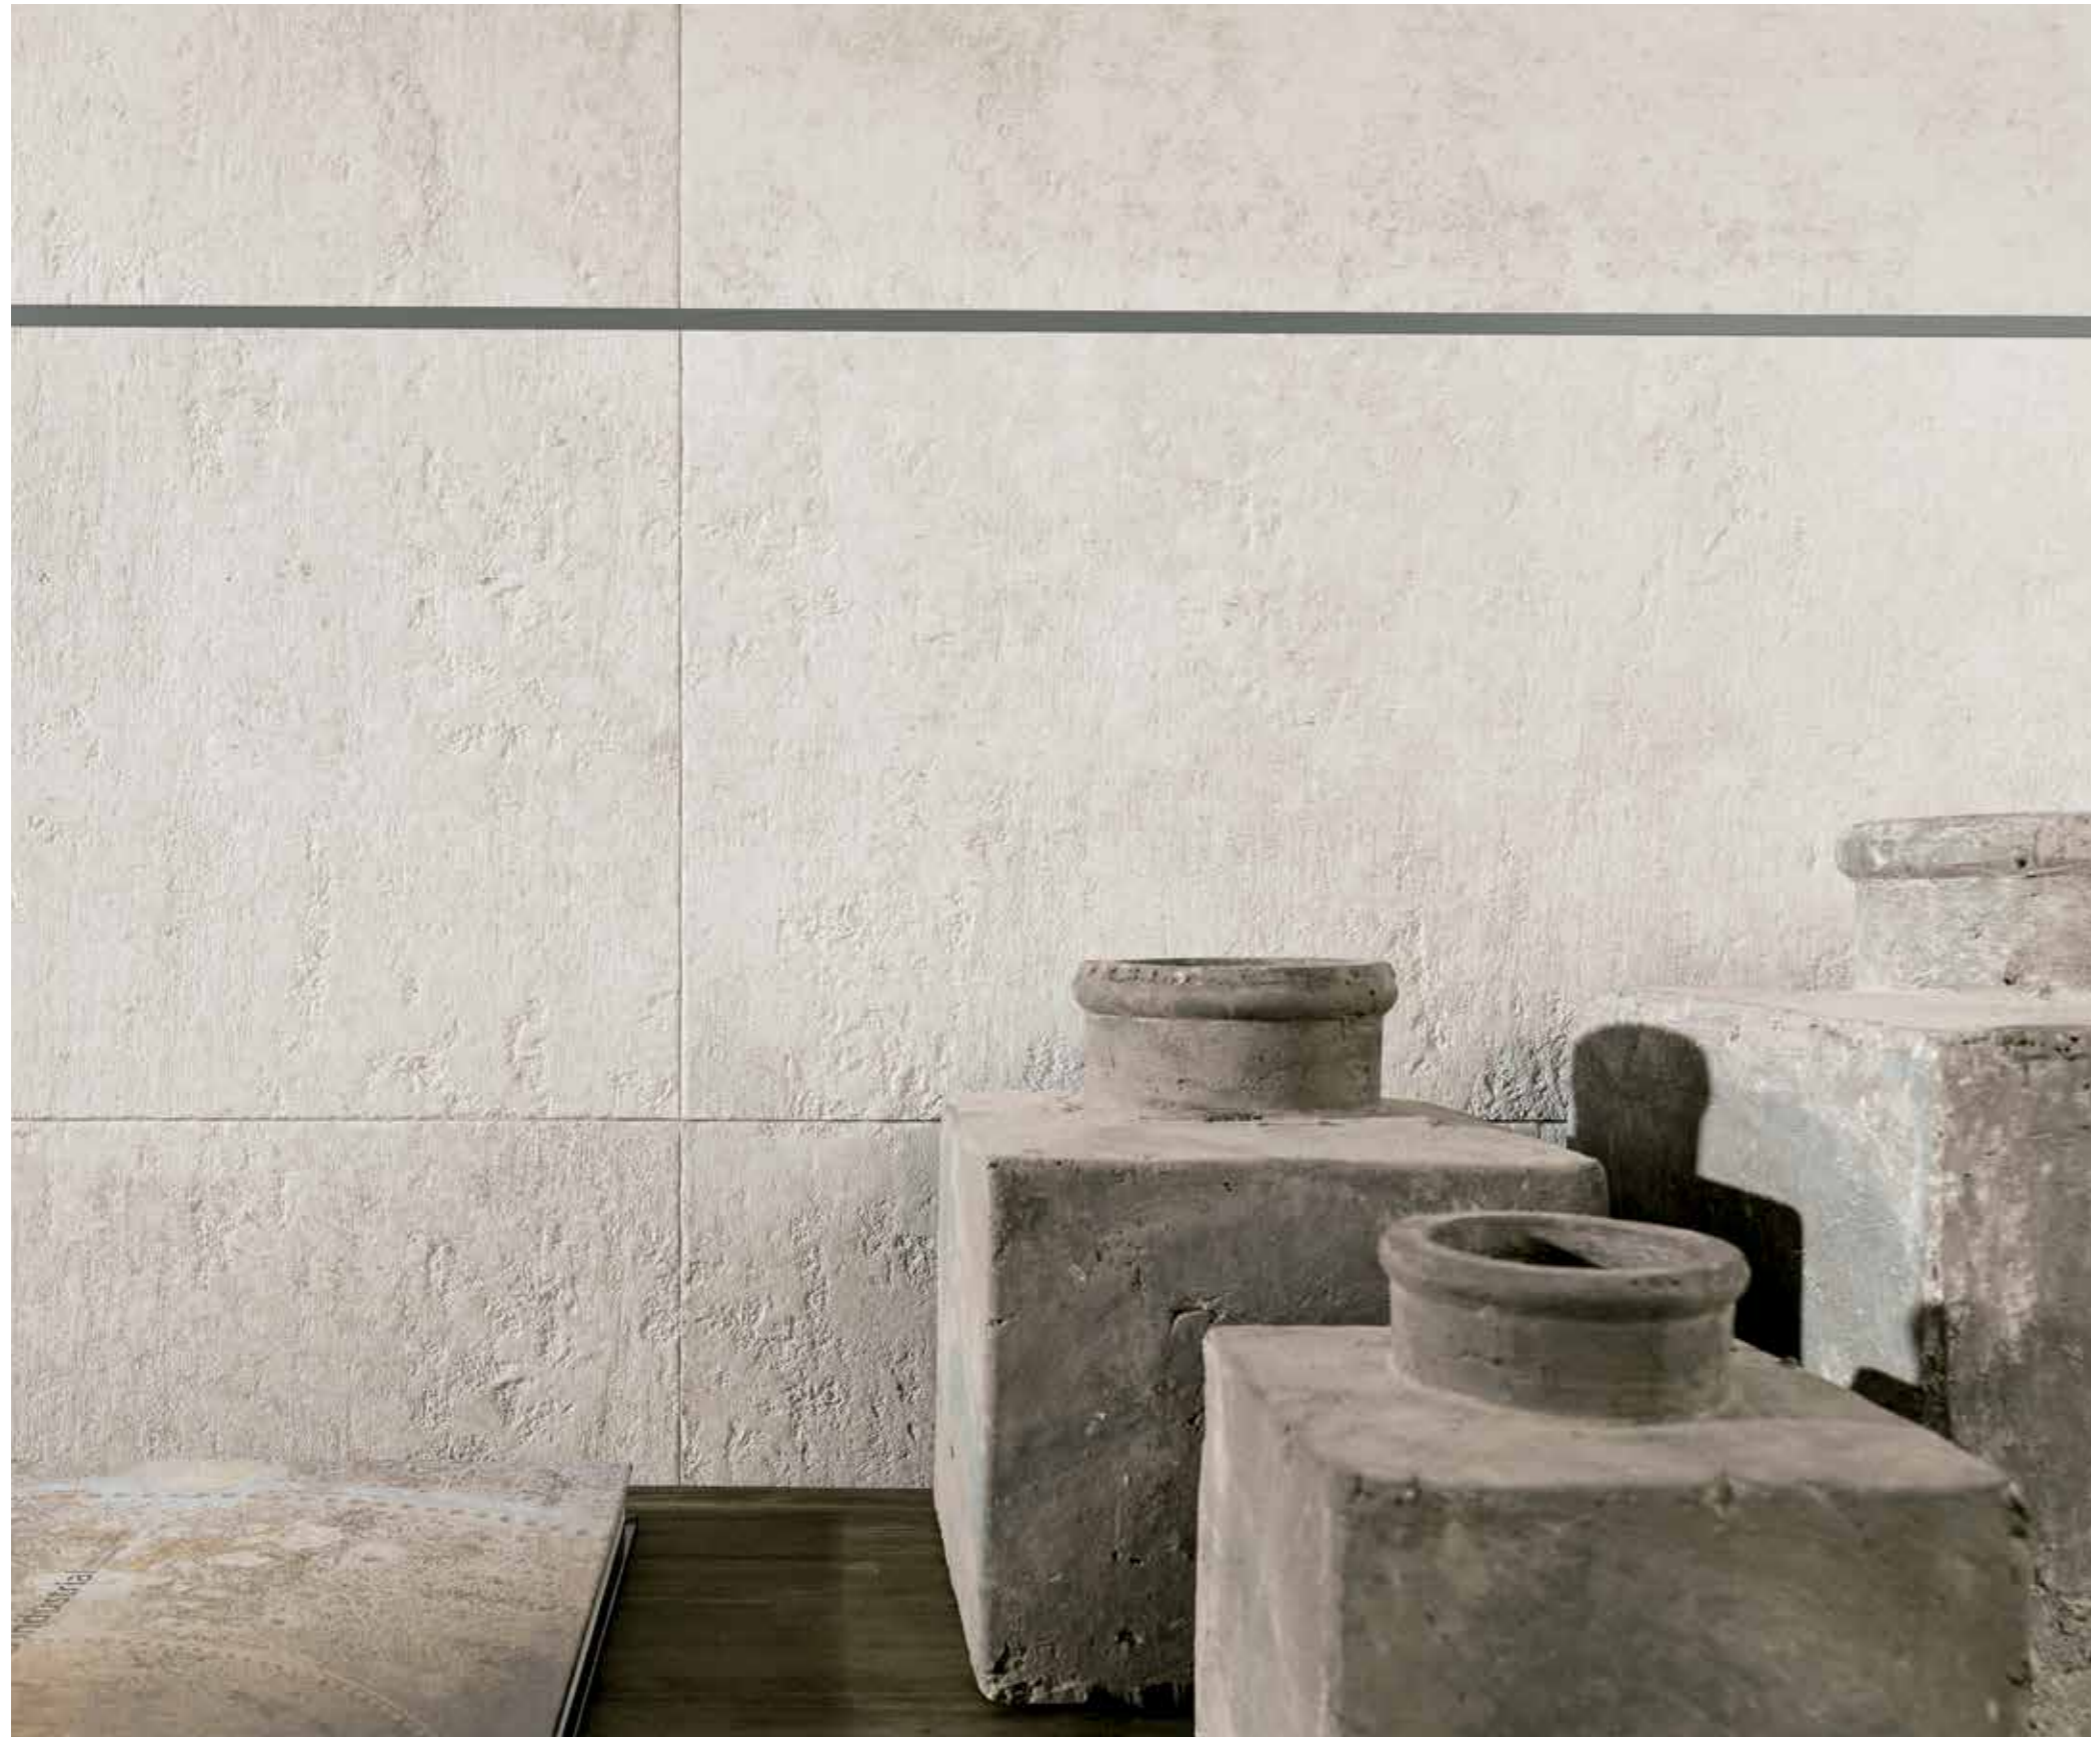

pro-part cement

Brass profile with matte metallic covering. 8 mm decorative trim.



pro-part cement 11mm
8x11x2500 mm

100226161
92.38 p/u

Matte metallic finish decorative profiles for ceramic wall tiles. It substitutes the traditional ceramic frieze.



pro-part sand

pro-part sand

Brass profile with matte metallic covering. 8 mm decorative trim.




pro-part sand 11mm
8x11x2500 mm

100226152
90.75 p/u

METAL COLLECTION

Metallic finish decorative profiles for ceramic wall tiles. It substitutes the traditional ceramic frieze.



pro-part anthracite

pro-part anthracite

Brass profile with metallic covering. 8 mm decorative trim.




pro-part anthracite 11mm
8x11x2500mm

100314848
107.31 p/u

METAL COLLECTION

Metallic finish decorative profiles for ceramic wall tiles. It substitutes the traditional ceramic frieze.



pro-part old iron

pro-part old iron

Brass profile with metallic covering. 8 mm decorative trim.




pro-part old iron 11mm
8x11x2500mm

100189093
107.15 p/u

METAL COLLECTION

Metallic finish decorative profiles for ceramic wall tiles. It substitutes the traditional ceramic frieze.



pro-part old bronze


pro-part old bronze

Brass profile with metallic covering. 8 mm decorative trim.



pro-part old bronze 7mm 8x7x2500mm	100278752 115.79 p/u
pro-part old bronze 11mm 8x11x2500mm	100189092 109.28 p/u
pro-part old bronze 12,5mm 8x12,5x2500mm	100243964 121.20 p/u

Matte metallic finish decorative profiles for ceramic wall tiles. It substitutes the traditional ceramic frieze.



pro-part rose line

pro-part rose

Brass profile with matte metallic covering. 8 mm decorative trim.



Shade 1

pro-part rose 7mm 8x7x2500 mm	100232244 151.05 p/u
pro-part rose 11mm 8x11x2500 mm	100231592 142.11 p/u
pro-part rose 12,5mm 8x12,5x2500 mm	100278753 152.32 p/u

Shade 2

pro-part rose 7mm 8x7x2500 mm	100297853 150.07 p/u
pro-part rose 11mm 8x11x2500 mm	100297848 139.47 p/u
pro-part rose 12,5mm 8x12,5x2500 mm	100297612 155.35 p/u

pro-part rose line

Brass profile with matte metallic covering. 8 mm decorative trim.





Shade 1

pro-part rose line 7mm 8x7x2500 mm	100232236 153.06 p/u
pro-part rose line 11mm 8x11x2500 mm	100231584 144.43 p/u
pro-part rose line 12,5mm 8x12,5x2500 mm	100278736 151.30 p/u

Shade 2

pro-part rose line 7mm 8x7x2500 mm	100297828 152.07 p/u
pro-part rose line 11mm 8x11x2500 mm	100297854 141.76 p/u
pro-part rose line 12,5mm 8x12,5x2500 mm	100297585 154.31 p/u

Metallic finish decorative profiles for ceramic wall tiles. It substitutes the traditional ceramic frieze.

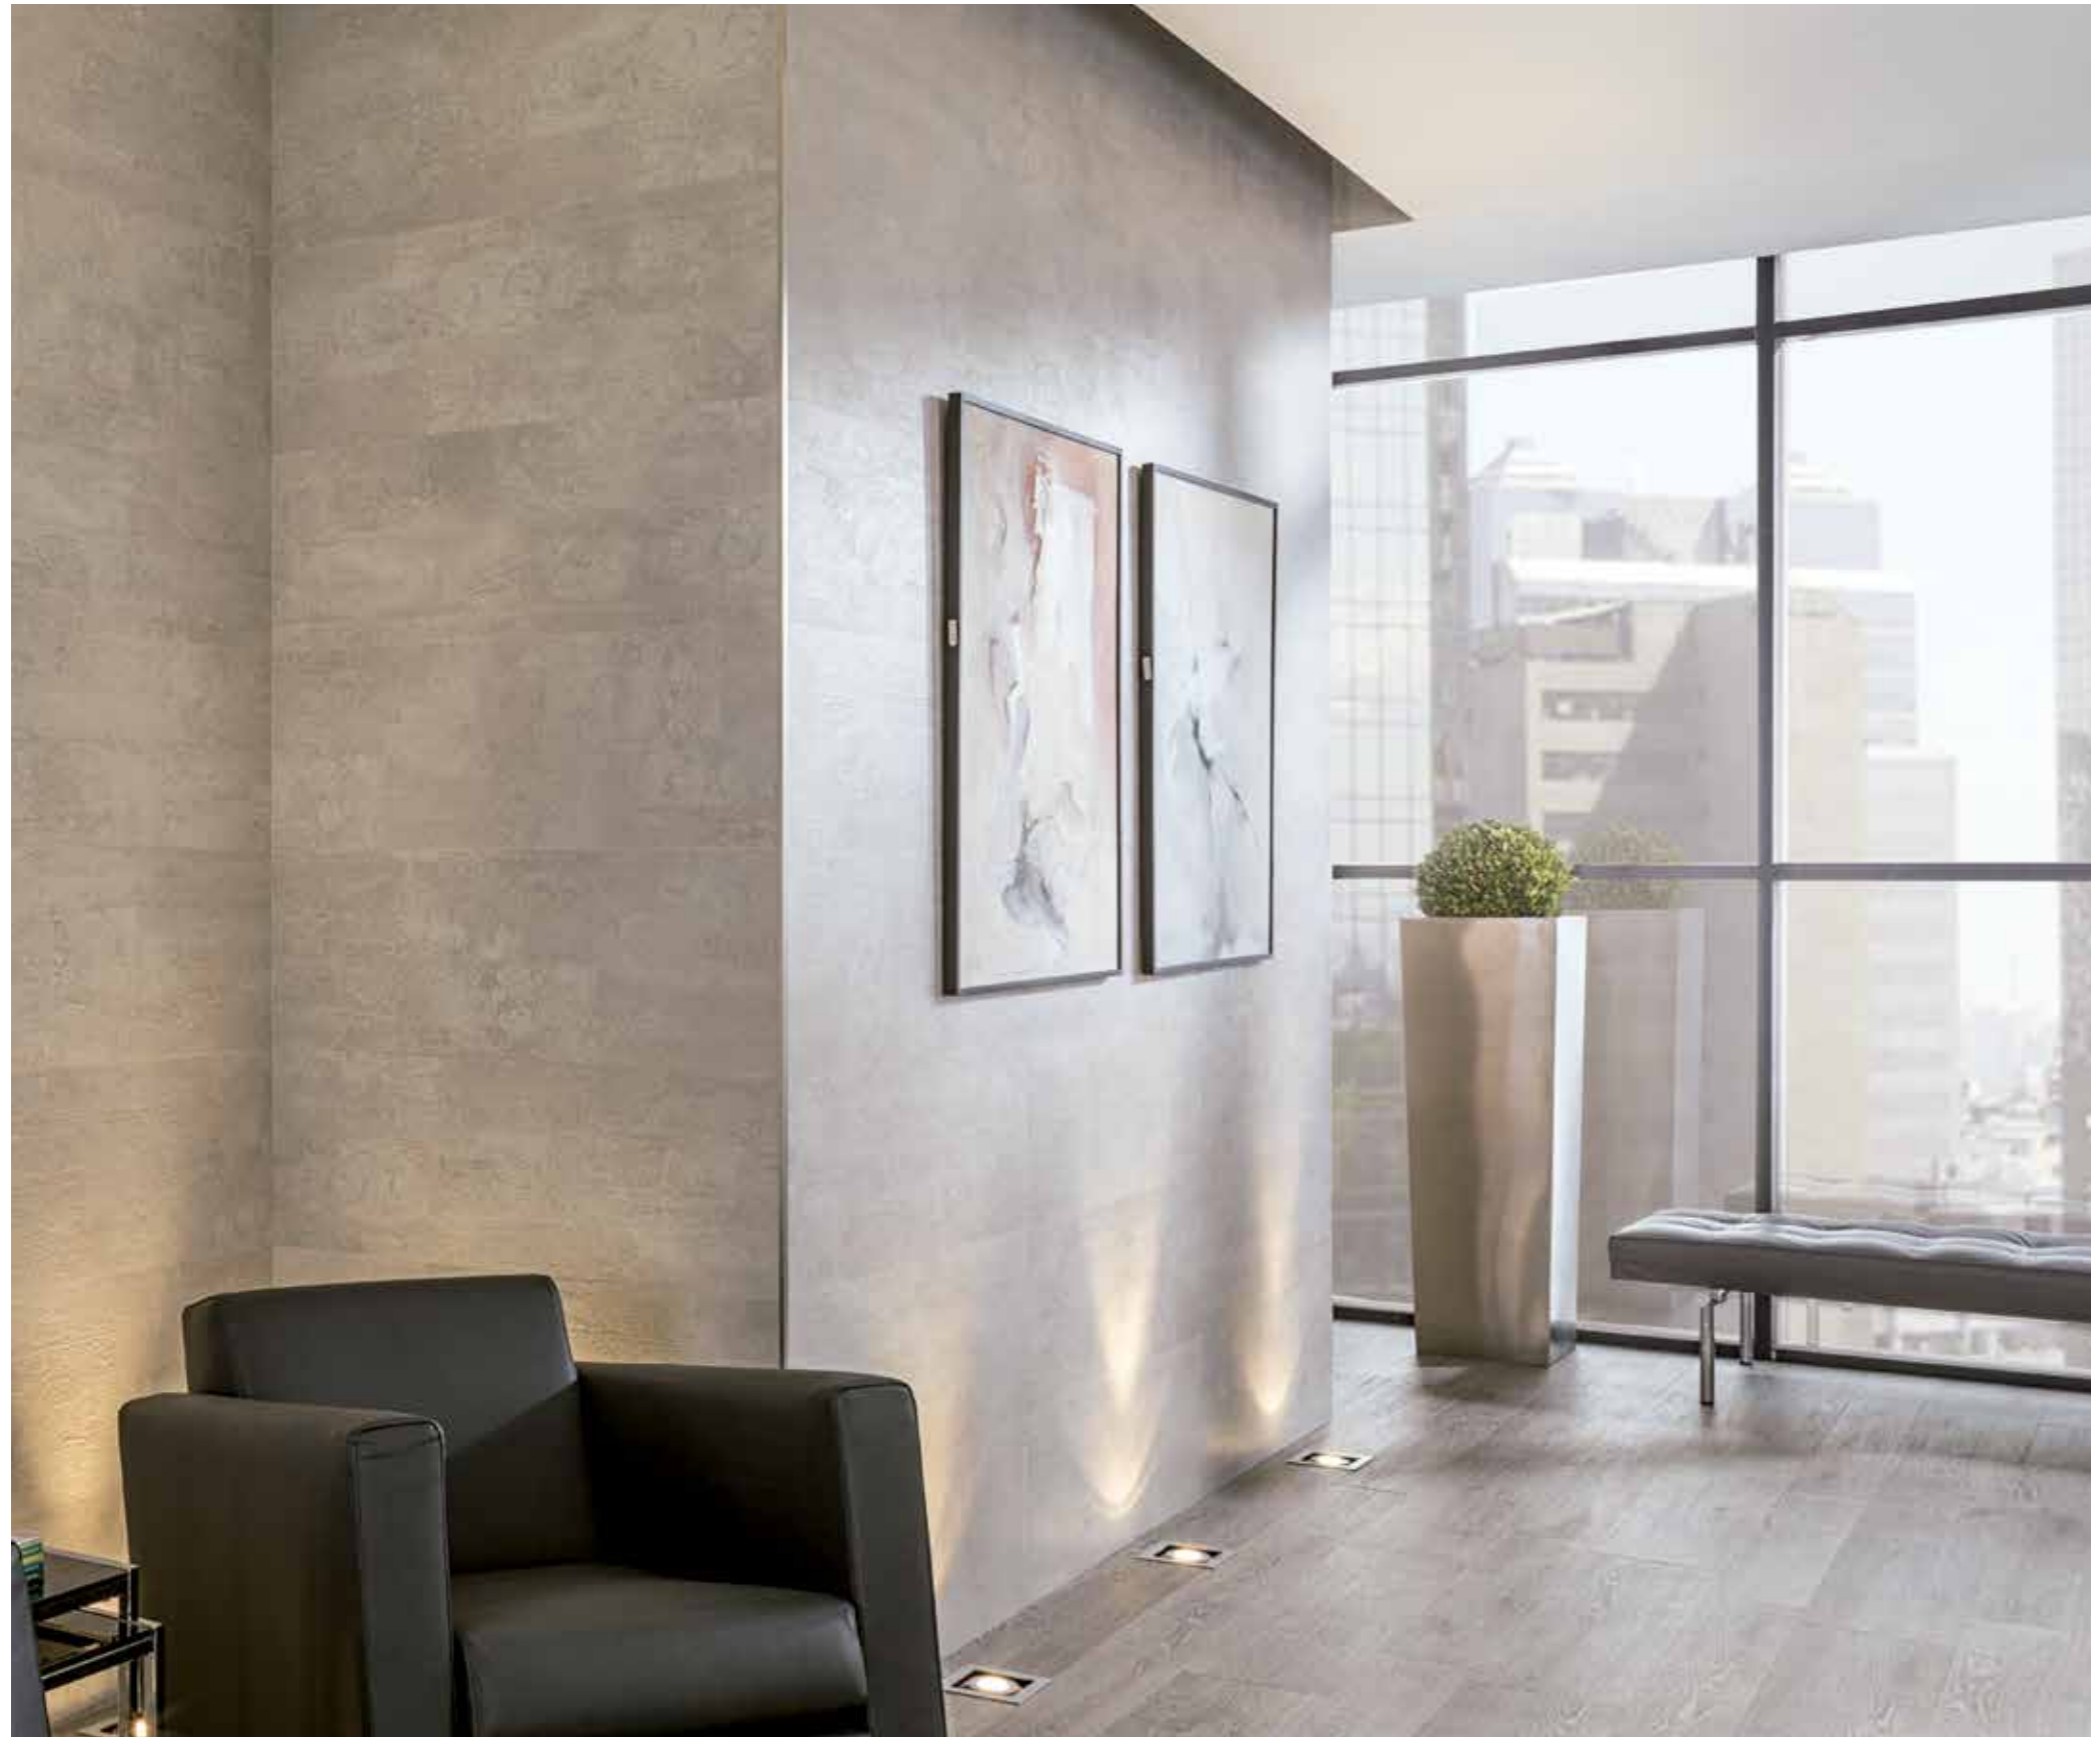

pro-part moon line

pro-part moon

Brass profile with metallic covering. 8 mm decorative trim.



Shade 1

pro-part moon 7mm 8x7x2500m	100177056 83.51 p/u
pro-part moon 11m 8x11x2500mm	100120369 104.97 p/u
pro-part moon 12,5mm 8x12,5x2500mm	100177071 107.95 p/u

Shade 2

pro-part moon 7mm 8x7x2500m	100297628 102.43 p/u
pro-part moon 11m 8x11x2500mm	100297599 110.18 p/u
pro-part moon 12,5mm 8x12,5x2500mm	100297691 121.81 p/u

pro-part moon line

Brass profile with metallic covering. 8 mm decorative trim.




Shade 1

pro-part moon line 7mm 8x7x2500mm	100177063 106.83 p/u
pro-part moon line 11mm 8x11x2500mm	100158267 100.23 p/u
pro-part moon line 12,5mm 8x12,5x2500mm	100177080 96.20 p/u

Shade 2

pro-part moon line 7mm 8x7x2500mm	100297638 107.97 p/u
pro-part moon line 11mm 8x11x2500mm	100297641 109.56 p/u
pro-part moon line 12,5mm 8x12,5x2500mm	100297597 121.06 p/u

Metallic finish decorative profiles for ceramic wall tiles. It substitutes the traditional ceramic frieze.



pro-part graphite matt line

pro-part graphite matt

Brass profile with metallic covering. 8 mm decorative trim.



Shade 1

pro-part graphite matt 7mm 8x7x2500 mm	100177037 115.83 p/u
pro-part graphite matt 11mm 8x11x2500 mm	100158266 114.94 p/u
pro-part graphite matt 12,5mm 8x12,5x2500 mm	100177053 116.95 p/u

Shade 2

pro-part graphite matt 7mm 8x7x2500 mm	100297570 117.06 p/u
pro-part graphite matt 11mm 8x11x2500 mm	100297543 116.17 p/u
pro-part graphite matt 12,5mm 8x12,5x2500 mm	100297607 118.21 p/u

pro-part graphite matt line

Brass profile with metallic covering. 8 mm decorative trim.





Shade 1

pro-part graphite matt line 7mm 8x7x2500 mm	100177055 115.83 p/u
pro-part graphite matt line 11mm 8x11x2500 mm	100158265 107.03 p/u
pro-part graphite matt line 12,5mm 8x12,5x2500 mm	100177036 98.65 p/u

Shade 2

pro-part graphite matt line 7mm 8x7x2500 mm	100297545 117.06 p/u
pro-part graphite matt line 11mm 8x11x2500 mm	100297539 116.97 p/u
pro-part graphite matt line 12,5mm 8x12,5x2500 mm	100297684 121.06 p/u

Metallic finish decorative profiles for ceramic wall tiles. It substitutes the traditional ceramic frieze.

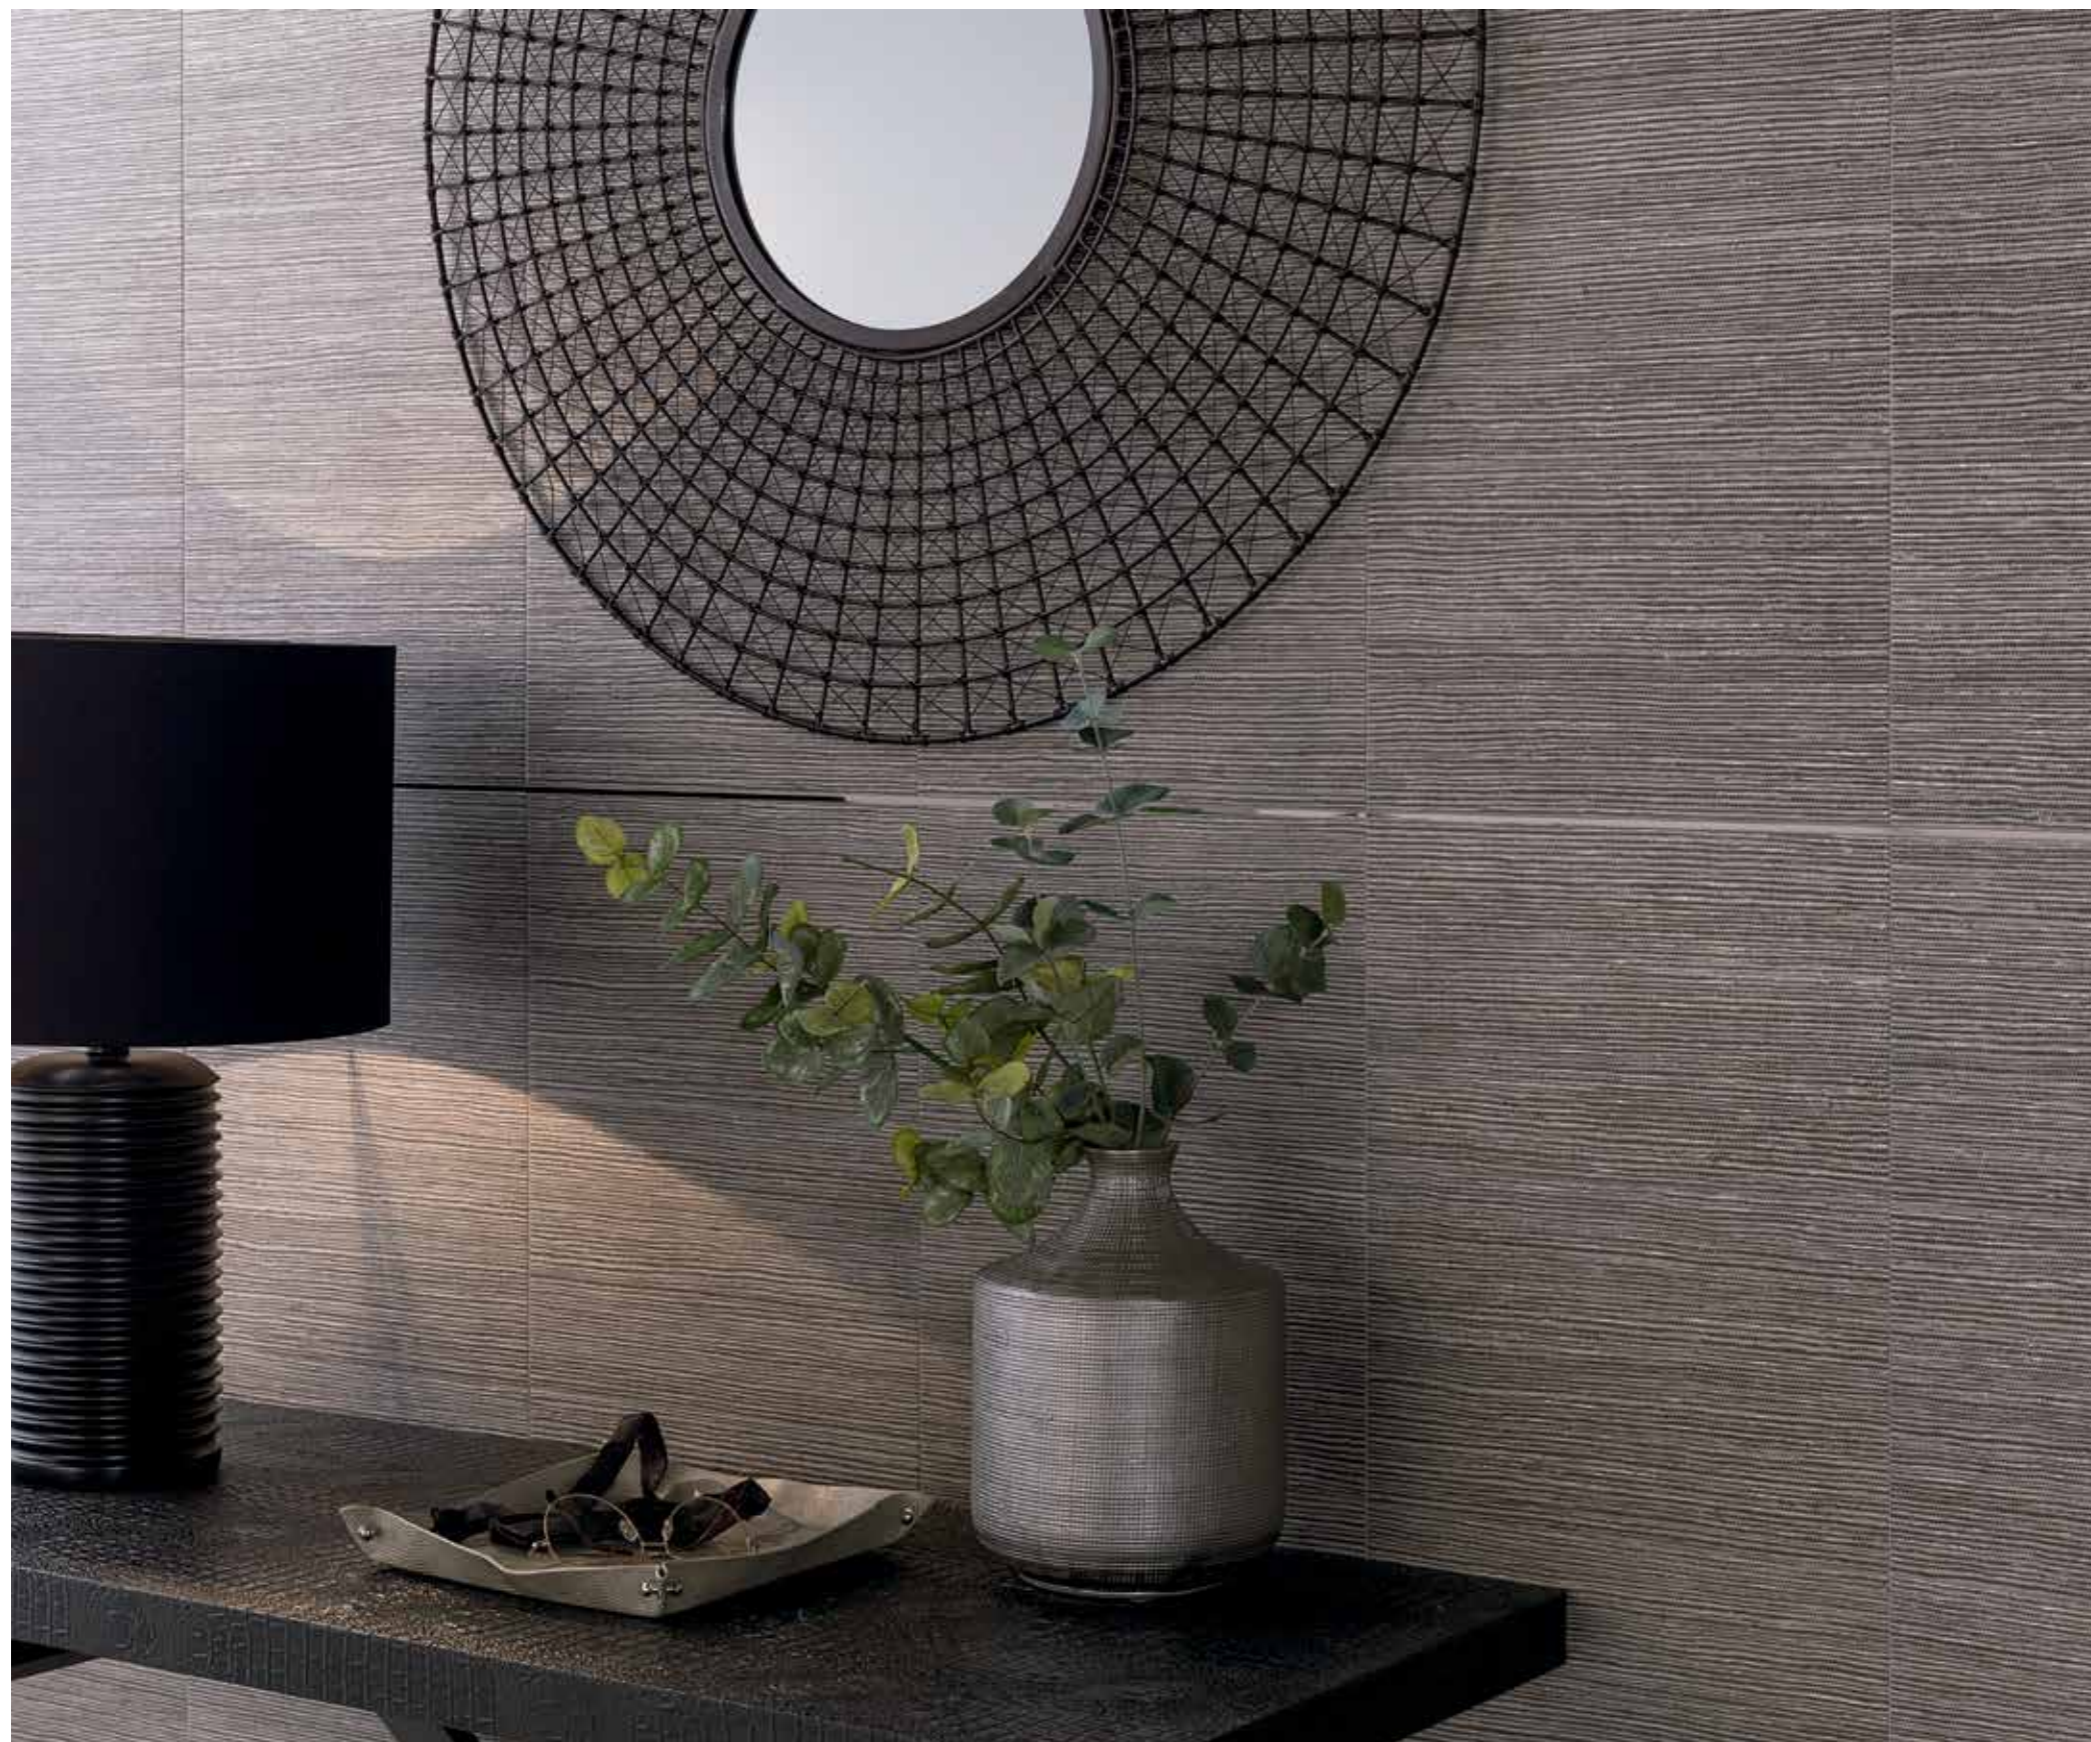

pro-part graphite

Brass profile with metallic covering. 8 mm decorative trim.



Shade 1

- pro-part graphite 7mm** 100177049
8x7x2500 mm **115.83** p/u
- pro-part graphite 11mm** 100120366
8x11x2500 mm **110.67** p/u
- pro-part graphite 12,5mm** 100177035
8x12,5x2500 mm **116.95** p/u

Shade 2

- pro-part graphite 7mm** 100297518
8x7x2500 mm **117.09** p/u
- pro-part graphite 11mm** 100297555
8x11x2500 mm **116.18** p/u
- pro-part graphite 12,5mm** 100297528
8x12,5x2500 mm **118.21** p/u

pro-part graphite

Metallic finish decorative profiles for ceramic wall tiles. It substitutes the traditional ceramic frieze.



pro-part line

pro-part line

Brass profile with metallic covering. 8 mm decorative trim.



pro-part line 7mm 8x7x2500 mm	100177061 79.67 p/u
pro-part line 11mm 8x11x2500 mm	100120367 99.28 p/u
pro-part line 12,5mm 8x12,5x2500 mm	100177058 87.45 p/u

pro-part line matt

Brass profile with metallic covering. 8 mm decorative trim.




pro-part line matt 7mm 8x7x2500 mm	100177062 79.67 p/u
pro-part line matt 11mm 8x11x2500 mm	100157798 93.40 p/u
pro-part line matt 12,5mm 8x12,5x2500 mm	100177059 83.28 p/u

CHROME COLLECTION

Chromed brass decorative profile for wall tiles. It substitutes the traditional decorative ceramic frieze. Typical LIFESTYLE by PROCELANOSA profile.

Suitable for trimming corners and transitions between ceramic tiles.

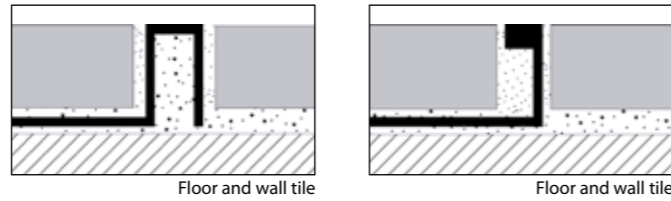


pro-part




Chromed brass			Chromed brass corner		
SAP	h (mm)	P/EU	SAP	h (mm)	P/EU
100005368	7	78.07 p/u	100005373	7	28.41 p/u
100177061	Line	79.67 p/u	100005374	9	28.41 p/u
100177062	Line matt	79.67 p/u	100091065	10	29.96 p/u
100005369	9	81.15 p/u	100005375	11	28.41 p/u
100088905	10	93.63 p/u	100005376	12,5	28.41 p/u
100005370	11	84.23 p/u			
100120367	Line	99.28 p/u			
100157798	Line matt	93.40 p/u			
100005371	12,5	86.91 p/u			
100177058	Line	87.45 p/u			
100177059	Line matt	83.28 p/u			

pro-mate 5



Chromed brass		
SAP	h (mm)	P/EU
100126779	7	78.09 p/u
100004945	9	71.40 p/u
100004946	11	74.02 p/u
100004955	12,5	76.61 p/u

pro-mate 3



Chromed brass		
SAP	h (mm)	P/EU
100126772	6	69.69 p/u
100004951	8	71.78 p/u
100004952	9	62.86 p/u
100004953	10	63.65 p/u
100004954	12,5	65.17 p/u




pro-part Li





Chromed brass			Chromed brass corner			
SAP	h (mm)	a (mm)	P/EU	SAP	h (mm)	P/EU
100126780	4,5	5,5	106.46 p/u	100098464	11	31.58 p/u
100070170	11	12	109.05 p/u	100085153	12,5	38.25 p/u
100070171	12,5	13,5	114.86 p/u			

pro-mate 45 TOP



Chromed brass		
SAP	h (mm)	P/EU
100126778	6	78.51 p/u
100099965	10	88.10 p/u
100128801	12,5	104.49 p/u

pro-mate 45



Chromed brass		
SAP	h (mm)	P/EU
100126776	6	80.50 p/u
100099963	10	95.99 p/u
100099964	12,5	102.61 p/u







PRO-TELO COLLECTION

Metal decorative profile for ceramic wall tiles. Flangeless metallic line for tiles of any thickness.

Available in a wide variety of materials, finishes and dimensions, they represent an excellent solution for the design of contemporary style ceramic settings.

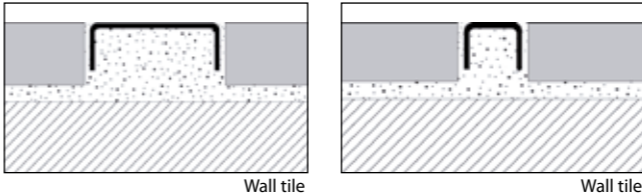


pro-telo stainless 8x40




Stainless Steel 8x40			
SAP	Finish	h (mm)	P/EU
100005299	Gloss	8	78.42 p/u

pro-telo stainless 8x25




Stainless Steel 8x25			
SAP	Finish	h (mm)	P/EU
100005293	Gloss	8	41.67 p/u

pro-telo aluminium 8x10



Aluminium 8x10 silver			
SAP	Finish	h (mm)	P/EU
100005289	Gloss	10	29.22 p/u
100005286	Anodized	10	18.61 p/u

pro-telo recto 8x10



Aluminium 8x10			
SAP	Finish	h (mm)	P/EU
100084015	High gloss	8	25.47 p/u




CORNER PROFILES AND TRIMS FOR WALL TILES


pro-mate 2

Right angle, stainless steel profile for corners and wall and floor tile coverings.

Right angle, 2 mm thick stainless steel profiles for trimming the non-glazed edge of the tile. Suitable for separating tiles in walls as well as in floors.

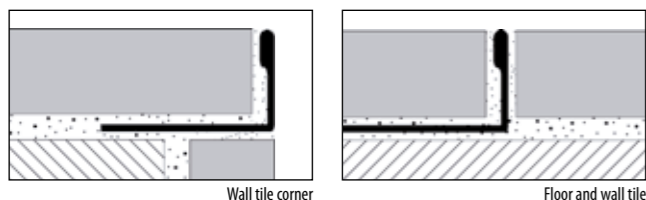

pro-mate 2



V2A Stainless steel

SAP	h (mm)	P/UK
100126769	6	30.54 p/u
100004957	10	26.97 p/u
100004958	12,5	27.90 p/u
100004959	15	46.86 p/u
100004960	20	50.31 p/u

V2A Gloss stainless steel

SAP	h (mm)	P/UK
100004967	10	34.27 p/u
100004968	12,5	41.58 p/u
100004969	15	57.88 p/u


V4A Stainless steel

SAP	h (mm)	P/UK
100004964	10	35.75 p/u
100004965	12,5	44.29 p/u


pro-mate 3

Right angle profile for corners and wall and floor tile coverings. Decorative use as a metallic line.

Right angle, 3 mm thick profiles for trimming the non-glazed edge of the tile. Available in a wide variety of materials, they are also suitable for separating wall tiles.

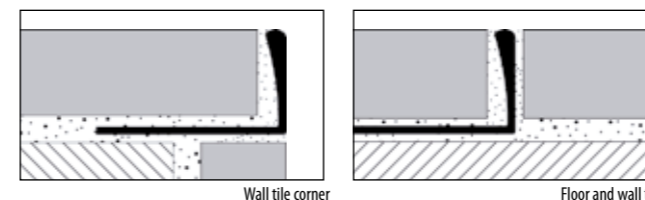


pro-mate 3



Chromed brass

SAP	h (mm)	P/UK
100126772	6	69.69 p/u
100004951	8	71.78 p/u
100004952	9	62.86 p/u
100004953	10	63.65 p/u
100004954	12,5	65.17 p/u



pro-mate 3



Anodized aluminium silver

SAP	h (mm)	P/UK
100126770	6	21.97 p/u
100004899	8	12.48 p/u
100004900	9	13.52 p/u
100004901	10	13.15 p/u
100200608	11	14.22 p/u
100004902	12,5	14.10 p/u
100004903	15	15.98 p/u

pro-mate 3



Lacquered aluminium

SAP	h (mm)	P/UK
100126771	6	22.06 p/u
100004911	10	20.21 p/u
100004912	12,5	20.93 p/u
100004915	10	19.24 p/u
100004916	12,5	20.93 p/u
100004919	10	19.24 p/u
100004920	12,5	20.93 p/u

High gloss aluminium

SAP	h (mm)	P/UK
100289643	8	14.96 p/u
100004925	10	27.09 p/u
100004926	12,5	27.88 p/u

PVC

SAP	h (mm)	P/UK
100004865	10	5.33 p/u
100004873	12,5	5.76 p/u
100004866	10	5.33 p/u
100004867	10	5.33 p/u
100004868	10	5.33 p/u
100004869	10	5.33 p/u


Black aluminium

SAP	h (mm)	P/UK
100220142	8	33.94 p/u
100171991	10	28.78 p/u
100220132	12,5	35.01 p/u


pro-mate 5

Right angle profile for corners and wall and floor tile coverings. Decorative use as a metallic line.

Right angle and 5 mm edge profiles for trimming the non-glazed edge of the tile. Suitable for transitions between floor coverings at the same level.

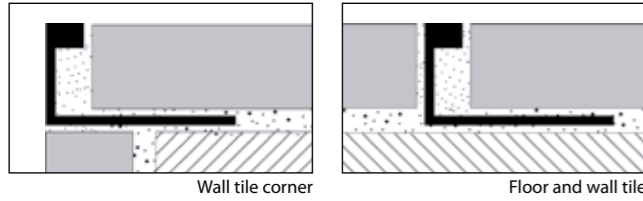


pro-mate 5



Chromed brass

SAP	h (mm)	P/UK
100126779	7	78.09 p/u
100004945	9	71.40 p/u
100004946	11	74.02 p/u
100004955	12,5	76.61 p/u



pro-mate 5



Anodized aluminium silver

SAP	h (mm)	P/UK
100004927	11	20.65 p/u

pro-mate 5




Gloss polished brass

SAP	h (mm)	P/UK
100004944	11	53.85 p/u


pro-part Li

Decorative profile for ceramic wall and floor tiles. Suitable for trimming corners and transitions between ceramic tiles.

Right angle, corner shaped profiles, with both sides of the same length. Specially recommended for rectified tiles corners and for tiles with relief decoration.

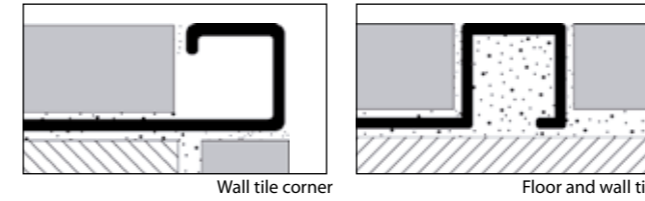

pro-part Li

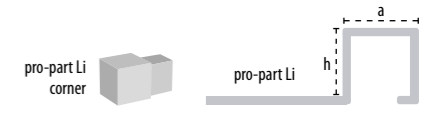


Chromed brass

SAP	h (mm)	a (mm)	P/UK
100126780	4,5	5,5	106.46 p/u
100070170	11	12	109.05 p/u
100070171	12,5	13,5	114.86 p/u

Chromed brass corner

SAP	h (mm)	P/UK
100098464	11	31.58 p/u
100085153	12,5	38.25 p/u

pro-part Li

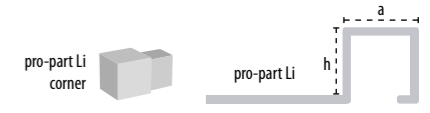



Anodized aluminium silver

SAP	h (mm)	a (mm)	P/UK
100128227	4,5	5,5	24.06 p/u
100062074	11	12	30.84 p/u
100062086	12,5	13,5	33.78 p/u

Anodized aluminium silver corner

SAP	h (mm)	P/UK
100093706	11	33.11 p/u
100093705	12,5	33.11 p/u

pro-part Li

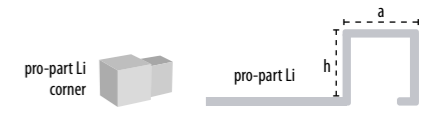



High gloss aluminium

SAP	h (mm)	a (mm)	P/UK
100062072	11	10	57.16 p/u
100062073	12,5	11,5	61.45 p/u

High gloss aluminium

SAP	h (mm)	P/UK
100102763	11	14.84 p/u
100102762	12,5	18.06 p/u

pro-part Li brushed

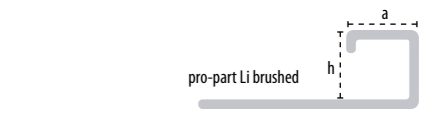


Brushed anodized aluminium

SAP	h (mm)	a (mm)	P/UK
100159084	11	12	59.13 p/u
100159083	12,5	13,5	56.63 p/u


pro-part

Decorative profile for ceramic wall and floor tiles. Suitable for trimming corners and transitions between ceramic tiles.

Right angle, corner shaped profiles, with an 8 mm edge and a variable width edge. Excellent solution for a wide variety of ceramic installations.

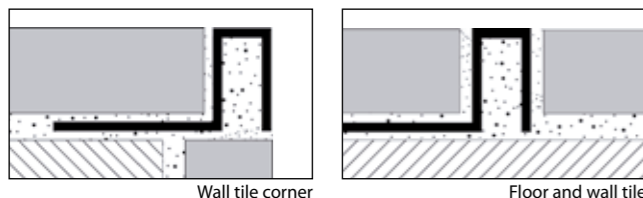


pro-part

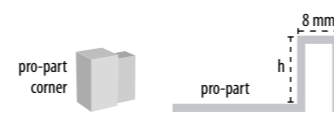



Chromed brass			Chromed brass corner		
SAP	h (mm)	P/UK	SAP	h (mm)	P/UK
100005368	7	78.07 p/u	100005373	7	28.41 p/u
100005369	9	81.15 p/u	100005374	9	28.41 p/u
100088905	10	93.63 p/u	100091065	10	29.96 p/u
100005370	11	84.23 p/u	100005375	11	28.41 p/u
100005371	12,5	86.91 p/u	100005376	12,5	28.41 p/u

pro-part

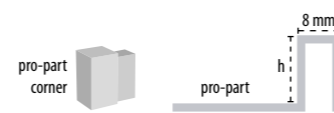

Anodized aluminium silver			Anodized aluminium silver corner		
SAP	h (mm)	P/UK	SAP	h (mm)	P/UK
100005322	7	17.53 p/u	100005336	7	23.64 p/u
100005323	9	18.48 p/u	100005337	9	23.64 p/u
100005324	11	19.40 p/u	100005338	11	25.28 p/u
100005325	12,5	21.28 p/u	100005339	12,5	23.64 p/u
100005326	15	22.94 p/u			

pro-part





Lacquered aluminium			White matt aluminium		
SAP	h (mm)	P/UK	SAP	h (mm)	P/UK
100088551	Black 11	36.72 p/u	100296752	11	37.83 p/u
100080530	Black 12,5	41.21 p/u	100286598	12,5	39.15 p/u
100100723	White 11	36.00 p/u			
100083438	White 12,5	41.21 p/u			

High gloss aluminium			Black matt aluminium			
KEA	SAP	h (mm)	P/UK	SAP	h (mm)	P/UK
	100089004	11	73.37 p/u	100220100	7	37.78 p/u
	100005353	12,5	70.80 p/u	100171975	11	32.58 p/u
				100220083	12,5	40.15 p/u




pro-part



Gloss polished brass		
SAP	h (mm)	P/UK
100005363	11	65.45 p/u
100005364	12,5	67.58 p/u

pro-part

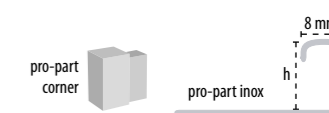


Stainless steel			Stainless steel corner		
SAP	h (mm)	P/UK	SAP	h (mm)	P/UK
100005377	9	35.35 p/u	100005380	9	25.28 p/u
100005378	11	38.60 p/u	100005381	11	25.28 p/u
100005379	12,5	40.96 p/u	100005382	12,5	27.32 p/u


pro-mate 45

Rounded profile for protecting wall tiles corners.

These profiles are the classic solution for protecting corners in wall tile coverings. Available in a wide variety of materials, its main feature is being shock-resistant.

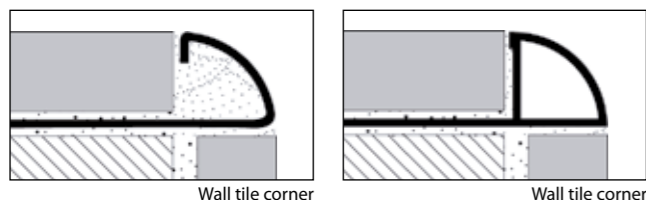



pro-mate 45 Top



Chromed brass		
SAP	h (mm)	P/UK
100126778	6	78.51 p/u
100099965	10	88.10 p/u
100128801	12,5	104.49 p/u



Anodized aluminium silver		
SAP	h (mm)	P/UK
100126777	6	27.74 p/u

pro-mate 45 brass




Chromed brass		
SAP	h (mm)	P/UK
100126776	6	80.50 p/u
100099963	10	95.99 p/u
100099964	12,5	102.61 p/u

pro-mate 45 stainless steel



Stainless steel V2A		
SAP	h (mm)	P/UK
100005156	8	41.47 p/u
100005157	10	86.71 p/u
100005158	12,5	52.87 p/u

pro-mate 45 aluminio



Anodized aluminium silver		
SAP	h (mm)	P/UK
100005094	10	16.88 p/u
100005096	12,5	18.59 p/u



Lacquered aluminium		
SAP	h (mm)	P/UK
100005113	White 10	22.18 p/u
100005117	White 12,5	20.91 p/u

High gloss aluminum		
SAP	h (mm)	P/UK
100096222	10	36.28 p/u
100100665	12,5	36.42 p/u



pro-corner

Metallic profile for protecting corners.

Right angle, metallic profiles for protecting corners. Most of the pro-corner models are installed after the tile, which implies a small lip over the tile surface.

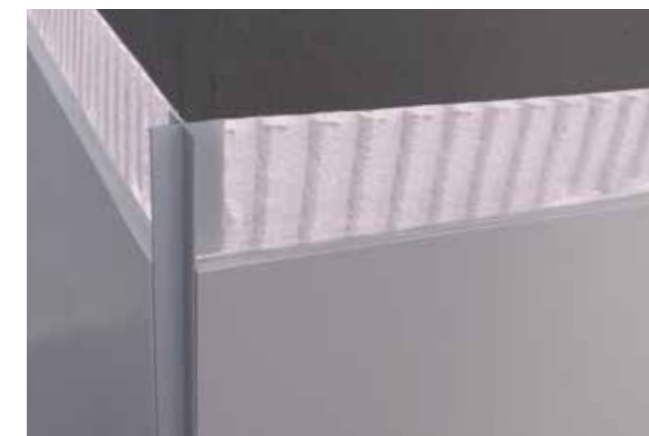
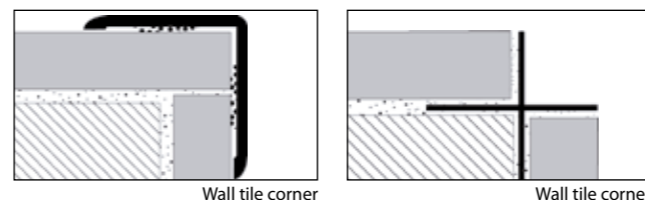


pro-corner P





Aluminium				
SAP		h1 (mm)	h2 (mm)	P/UK
100158001	High gloss	15	12	86.06 p/u
100158002	Silver	15	12	75.94 p/u
100213125	Black	15	12	102.94 p/u

pro-corner R



Gloss stainless steel		
SAP	h (mm)	P/UK
100005623	25	63.81 p/u


pro-corner B




Anodized aluminium silver		
SAP	h (mm)	P/UK
100005584	25	25.91 p/u

3 meter profiles

Profiles available in different shapes, from right-angled profiles for straight trims to rounded shape profiles.

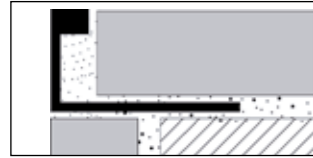

Wall tile corner

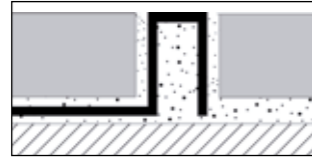


Wall tile




pro-mate 2

SAP		h (mm)	P/UK
100276385	Inox V2A	11	38.94 p/u
100276386	Inox V2A	12,5	40.38 p/u




pro-mate 3

SAP		h (mm)	P/UK
100286309	Chrome	12,5	92.61 p/u
100276187	Alum. anod.	11	23.08 p/u
100276196	Alum. anod.	12,5	23.85 p/u
100286597	Alum. black	12,5	37.67 p/u
100276394	PVC white	12,5	p/u




pro-mate 5

SAP		h (mm)	P/UK
100286603	Chrome	11	105.20 p/u




pro-part

SAP		h (mm)	P/UK
100286618	Chrome	11	120.72 p/u
100286360	Chrome	12,5	121.20 p/u



pro-part Li

SAP		h (mm)	P/UK
100276440	Inox V2A	11	53.11 p/u
100276480	Inox V2A	12,5	58.02 p/u
100276510	Inox. gloss	11	58.76 p/u
100276459	Inox. gloss	12,5	75.18 p/u
100276492	Inox. brushed	12,5	75.18 p/u
100276208	Alum. anod.	11	32.09 p/u
100276198	Alum. anod.	12,5	35.49 p/u



pro-mate 45

SAP		h (mm)	P/UK
100276415	PVC white	11	7.29 p/u
100276371	Inox.	10	50.45 p/u
100276372	Inox.	12,5	53.04 p/u
100276367	Alum. anod.	10	24.68 p/u
100276299	Alum. anod.	12,5	28.41 p/u
100276352	Alum. lac. white	11	30.82 p/u
100276319	Alum. lac. white	12,5	32.55 p/u






pro-T

Profile for transitions between floor or wall coverings.

Profiles for transitions between tiles or slabs with slightly different heights. Available in two widths: 14 and 25 mm.


Specially recommended for transitions between ceramic tiles and wooden floors.

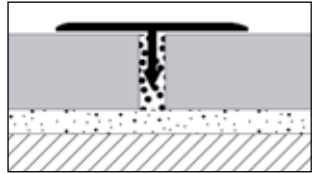

Floor tile




pro-T



Chromed brass

SAP	h (mm)	P/UK
100005460	14	55.73 p/u
100005461	25	60.71 p/u


pro-T



Anodized aluminium silver

SAP	h (mm)	P/UK
100005452	14	8.57 p/u
100005453	25	15.67 p/u

pro-T



Gloss stainless steel

SAP	h (mm)	P/UK
100005462	14	52.81 p/u
100005463	25	61.19 p/u


Brushed stainless steel

SAP	h (mm)	P/UK
100005464	14	55.29 p/u
100005465	25	69.85 p/u


pro-level

Transition profile between floor coverings at different levels. It covers the non-glazed edge of the tile and protects it from shocks.

Technical profiles for small height differences between floor coverings. Available in rounded finish and sloped finish. Specially recommended for high transit floors.

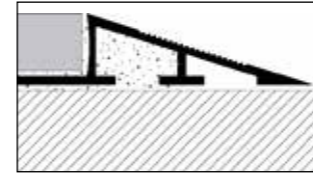


Floor tile

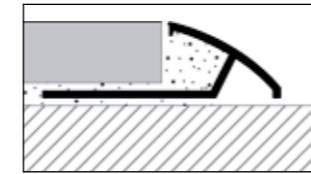

Floor tile



pro-level C



Anodized aluminium silver

SAP	h (mm)	P/UK
100005426	11	20.65 p/u
100005427	12,5	27.62 p/u

pro-level R




Anodized aluminium silver

SAP	h (mm)	P/UK
100005428	11	56.70 p/u
100005429	12,5	62.33 p/u
100005430	15	67.05 p/u
100005431	20	90.18 p/u

pro-shower

New range of profiles for shower trays. Designed to cover the sides of shower trays; specially for shower with only one direction slope. There are also special trims for installing glass screens.

These profiles are made of stainless steel and are available in two different finishings: gloss and brushed.

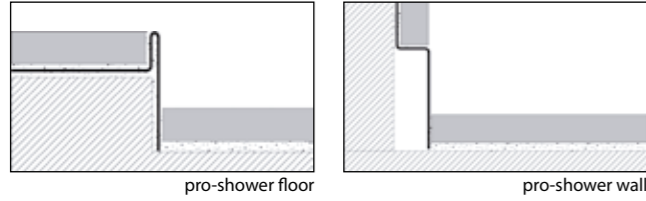


pro-shower floor



Chromed stainless steel				Brushed stainless steel					
SAP		h1 (mm)	h2 (mm)	P/UK	SAP	h1 (mm)	h2 (mm)	P/UK	
100159068	Left side	12,5	24	87.31 p/u	100159067	Left side	12,5	32	114.74 p/u
100160219	Right side	12,5	24	84.00 p/u	100160218	Right side	12,5	32	110.44 p/u
100159069	Left side	12,5	32	137.85 p/u					
100160280	Right side	12,5	32	132.66 p/u					

Profile length h2=24 980 mm
Profile length h2=32 1480 mm

Profile length h2=32 1480 mm





pro-shower wall



Chromed stainless steel				Brushed stainless steel					
SAP		h1 (mm)	h2 (mm)	P/UK	SAP	h1 (mm)	h2 (mm)	P/UK	
100159100	Left side	12,5	32	137.85 p/u	100159088	Left side	12,5	32	114.74 p/u
100160248	Right side	12,5	32	132.66 p/u	100160246	Right side	12,5	32	110.44 p/u

Profile length h2=32 1480 mm


Profile length h2=32 1480 mm

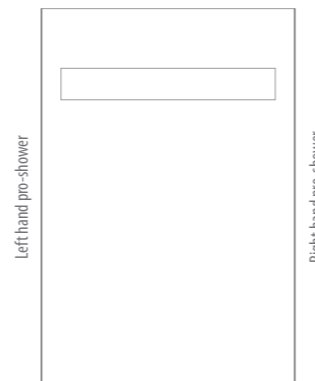

pro-sanit

Concave profile for installation where walls and floors meet or between wall coverings and bathtubs, shower trays or other bath elements. It substitutes the traditional curve ceramic piece.

It reduces the risk of water leakage and eases cleaning and preservation of angles between floor and wall coverings.

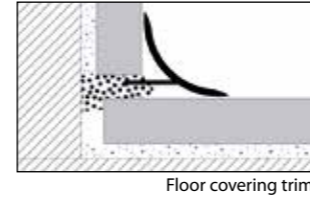

pro-sanit U1




High gloss aluminum		
SAP	h (mm)	P/UK
100062075	16	34.61 p/u
100062076	22	39.50 p/u

Anodized aluminium silver		
SAP	h (mm)	P/UK
100062077	16	14.96 p/u
100062078	22	18.73 p/u


Lacquered aluminium			
SAP		h (mm)	P/UK
100062079	white	16	21.00 p/u
100062080	white	22	26.25 p/u

pro-sanit U2



Stainless steel				Stainless steel corner			
SAP		h (mm)	P/UK	SAP	h (mm)	P/UK	
100005566	Gloss	12,5	62.67 p/u	100005567	Gloss outer	12,5	10.23 p/u
100005569	Brushed	12,5	84.62 p/u	100005568	Gloss inner	12,5	10.23 p/u
				100005570	Brushed outer	12,5	10.23 p/u
				100005571	Brushed internal	12,5	10.23 p/u

pro-sanit U2





PVC			
SAP		h (mm)	P/UK
100005542	white	11 x 9	22.41 p/u

pro-dilata


Profile for movement joints in ceramic wall and floor coverings.

PVC profiles with a central elastic joint for the absorption of tensions in the ceramic floor. Available in several colours and joint widths, they are the best solution for creating intermediate movement joints.

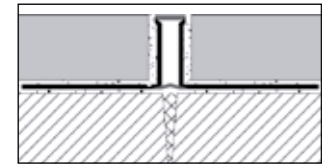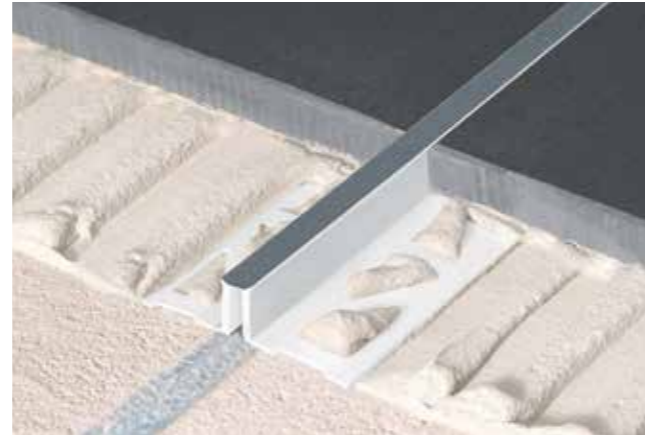



Floor tile

pro-dilata PVC



CFL 8 mm			
SAP		h (mm)	P/EU
100005685	White	12,5	13.31 p/u
100005682	Beige	10	14.82 p/u
100005686	Beige	12,5	13.31 p/u
100005690	Beige	15	17.20 p/u
100005683	Black	10	14.82 p/u
100005687	Black	12,5	13.31 p/u
100005691	Black	15	17.20 p/u
100005684	Grey	10	14.82 p/u
100005688	Grey	12,5	13.31 p/u
100005692	Grey	15	17.20 p/u

pro-dilata PVC

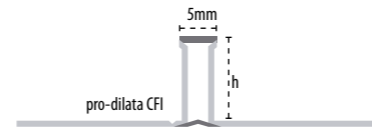


CFI 5 mm			
SAP		h (mm)	P/EU
100316178	Light grey	9	14.89 p/u
100159078	Light grey	11	14.24 p/u
100159080	Light grey	12,5	14.66 p/u
100316191	Grey	9	14.89 p/u
100159076	Grey	11	14.24 p/u
100159077	Grey	12,5	14.66 p/u
100316182	Black	9	14.89 p/u
100159081	Black	11	14.24 p/u
100159082	Black	12,5	14.66 p/u
100316183	Beige	9	14.89 p/u
100159074	Beige	11	14.24 p/u
100159075	Beige	12,5	14.66 p/u

pro-dilata



Profile for movement joints in ceramic floor coverings.

Metal profiles with a central elastic joint for the absorption of tensions in the ceramic floor. New pro-dilata is a 8 and 10 mm wide precast expansion joint for indoor and outdoor ceramic floors.

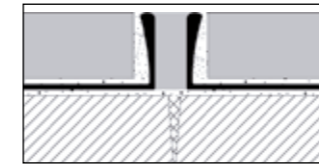



Floor tile

pro-dilata stainless steel

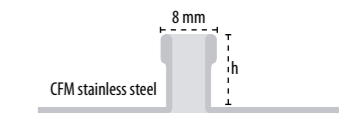



CFM 8 mm		
SAP	h (mm)	P/EU
100005715	12,5	87.82 p/u
100005716	15	128.89 p/u
100005717	20	129.72 p/u

pro-dilata stainless steel nc

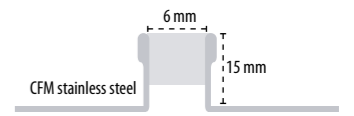

CFM 11,6 mm		
SAP	h (mm)	P/EU
100005714	10	109.72 p/u
100280152	15	114.54 p/u

pro-dilata aluminium

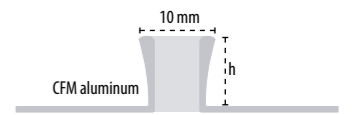



CFM 10 mm		
SAP	h (mm)	P/EU
100005698	10	72.70 p/u
100005699	12,5	58.07 p/u
100005700	15	60.98 p/u
100005702	20	69.02 p/u


structural joints

Profile for structural joints in ceramic floor coverings.

Metallic profiles with a central elastic joint that absorbs the structural movements of the support. Available with deformable polypropylene joint for pedestrian transit and moving metallic joint for wheeled transit.

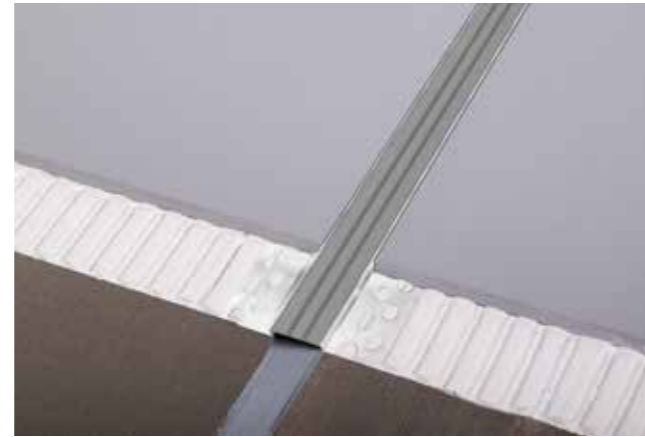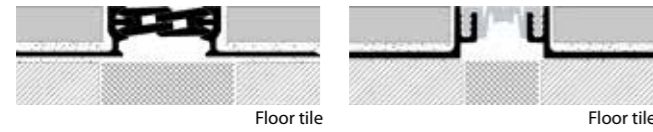

structural joints BT


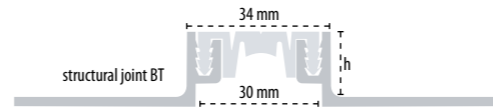


BT-40

SAP		h (mm)	P/UK
100298904	Grey	22	114.84 p/m
100298885	Grey	40	137.83 p/m

Accepted traffic: Pedestrian and vehicles with pneumatic wheels up to 35 kN.

structural joints AT

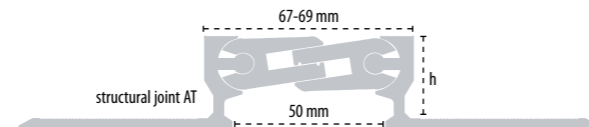

AT-50


SAP		h (mm)	P/UK
100285036		22	196.40 p/m
100285329		50	277.53 p/m

Accepted traffic: Pedestrian, vehicles with pneumatic wheels up to 300 kN and forklift trucks or solid wheeled hand pallet trucks up to 9 kg/mm.



pro-step

Profile for the making of stair steps. It substitutes the traditional step ceramic piece by a combination of ceramic tile and profile.

Metallic profiles that cover the non-glazed edge of the tile, protect it from shocks and reduce the risk of slipping.

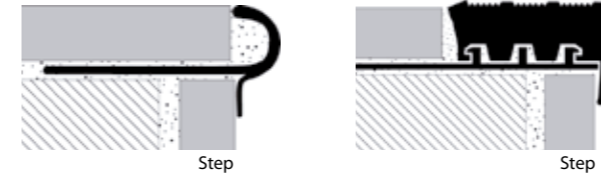



pro-step



Stainless steel M2

SAP	h (mm)	P/UK
100005523	11	54.83 p/u



pro-step



Anodized aluminium silver M1

SAP	h (mm)	P/UK
100005509	11	22.50 p/u
100067688	13,5	24.36 p/u

pro-step



PVC 35

SAP		h (mm)	P/UK
100005482	Grey	11	37.48 p/u



Metal profiles. They replace traditional ceramic skirting. Specially recommended for shops and public buildings.




pro-skirting black



pro-skirting white




pro-skirting silver




pro-skirting black




pro-skirting black			pro-skirting corner black		
SAP		P/UK	SAP		P/UK
100213522	12x60x2500 mm	34.78 p/u	100213153	12x60x12 mm	12.09 p/u
100225511	12x100x2500 mm	49.48 p/u	100236020	12x100x12 mm	13.22 p/u




pro-skirting white



pro-skirting white			pro-skirting corner white		
SAP		P/UK	SAP		P/UK
100213533	12x60x2500 mm	32.83 p/u	100213200	12x60x12 mm	12.09 p/u
100225498	12x100x2500 mm	49.48 p/u	100235979	12x100x12 mm	13.22 p/u



pro-skirting silver



pro-skirting silver			pro-skirting corner silver		
SAP		P/UK	SAP		P/UK
100213532	12x60x2500 mm	34.78 p/u	100213199	12x60x12 mm	12.09 p/u
100225479	12x100x2500 mm	49.92 p/u	100235986	12x100x12 mm	13.22 p/u

Fixing clips pro-skirting


SAP		P/UK
100193608	17x30 mm 50 ud	15.60 p/bag

Profile length: 2500 mm





PRO-SKIRTING CUSTOMIZED

Decorative skirtings for PAR-KER tiles by PORCELANOSA. LIFESTYLE design.

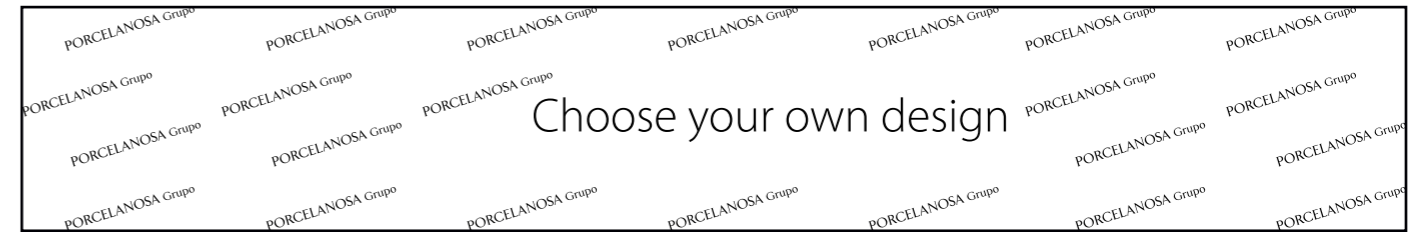

pro-skirting customized



Customized metal profiles with any Porcelanosa Group finish. Butech expands the pro-skirting range by providing solutions for all types of tile flooring. Besides the existing silver, black and white options, new customized skirting boards can be produced with the same finish of any PORCELANOSA Group tile collection. Wood, concretes, stones, marbles, metallics, solid colours, hydraulic pattern.

pro-skirting customized			pro-skirting corner customized		
SAP		P/EU	SAP		P/EU
100306733	12x60x1800 mm	36.65 p/u	100307574	12x60x12 mm	13.94 p/2u
100306689	12x100x1800 mm	47.57 p/u	100306797	12x100x12 mm	13.94 p/2u

Fixing clips pro-skirting customized		
SAP		P/EU
100193608	17x30 mm 50 ud	15.60 p/bag


Profile length: 1800 mm

PRO-SKIRTING PAR-KER


Decorative skirtings for PAR-KER tiles by PORCELANOSA.
LIFESTYLE design.



pro-skirting Oxford Acero



pro-skirting Oxford



pro-skirting Oxford Acero			pro-skirting corner Oxford Acero		
SAP		P/UK	SAP		P/UK
100193645	12x60x1800 mm	35.65 p/u	100233474	12x60x12 mm	14.40 p/2u
100178475	12x100x1800 mm	48.23 p/u	100233572	12x100x12 mm	14.40 p/2u
pro-skirting Oxford Antracita			pro-skirting corner Oxford Antracita		
SAP		P/UK	SAP		P/UK
100193646	12x60x1800 mm	35.65 p/u	100233460	12x60x12 mm	14.40 p/2u
100178471	12x100x1800 mm	48.23 p/u	100233528	12x100x12 mm	14.40 p/2u
pro-skirting Oxford Castaño			pro-skirting corner Oxford Castaño		
SAP		P/UK	SAP		P/UK
100193605	12x60x1800 mm	35.65 p/u	100233419	12x60x12 mm	14.40 p/2u
100178435	12x100x1800 mm	48.23 p/u	100233570	12x100x12 mm	14.40 p/2u
pro-skirting Oxford Cognac			pro-skirting corner Oxford Cognac		
SAP		P/UK	SAP		P/UK
100193547	12x60x1800 mm	35.65 p/u	100233453	12x60x12 mm	14.40 p/2u
100178437	12x100x1800 mm	48.23 p/u	100233563	12x100x12 mm	14.40 p/2u
pro-skirting Oxford Natural			pro-skirting corner Oxford Natural		
SAP		P/UK	SAP		P/UK
100193598	12x60x1800 mm	35.65 p/u	100233438	12x60x12 mm	14.40 p/2u
100178462	12x100x1800 mm	48.23 p/u	100233547	12x100x12 mm	14.40 p/2u
pro-skirting Oxford Blanco			pro-skirting corner Oxford Blanco		
SAP		P/UK	SAP		P/UK
100193597	12x60x1800 mm	35.65 p/u	100233470	12x60x12 mm	14.40 p/2u
100178436	12x100x1800 mm	48.23 p/u	100233562	12x100x12 mm	14.40 p/2u

Fixing clips pro-skirting PAR-KER

SAP		P/UK
100193608	17x30 mm 50 ud	15.60 p/bag


Profile length: 1800 mm

PRO-SKIRTING PAR-KER

Decorative skirtings for PAR-KER tiles by PORCELANOSA.
LIFESTYLE design.



pro-skirting Ascot Teca



pro-skirting Ascot



pro-skirting Ascot Teca

SAP	Dimensions	P/UK
100193642	12x60x1800 mm	35.65 p/u
100178466	12x100x1800 mm	48.23 p/u

pro-skirting corner Ascot Teca

SAP	Dimensions	P/UK
100233495	12x60x12 mm	14.40 p/2u
100233581	12x100x12 mm	14.40 p/2u

pro-skirting Ascot Arce

SAP	Dimensions	P/UK
100193595	12x60x1800 mm	35.65 p/u
100178480	12x100x1800 mm	48.23 p/u

pro-skirting corner Ascot Arce

SAP	Dimensions	P/UK
100233408	12x60x12 mm	14.40 p/2u
100233565	12x100x12 mm	14.40 p/2u

Fixing clips pro-skirting PAR-KER

SAP	Dimensions	P/UK
100193608	17x30 mm 50 ud	15.60 p/bag

Profile length: 1800 mm


pro-skirting Ascot Teca

PRO-SKIRTING PAR-KER

Decorative skirtings for PAR-KER tiles by PORCELANOSA.
LIFESTYLE design.



pro-skirting Manhattan Colonial



pro-skirting Manhattan



pro-skirting Manhattan Colonial			pro-skirting corner Manhattan Colonial		
SAP		P/UK	SAP		P/UK
100193603	12x60x1800 mm	35.65 p/u	100233574	12x60x12 mm	14.40 p/2u
100189248	12x100x1800 mm	48.23 p/u	100233555	12x100x12 mm	14.40 p/2u
pro-skirting Manhattan Maple			pro-skirting corner Manhattan Maple		
SAP		P/UK	SAP		P/UK
100193604	12x60x1800 mm	35.65 p/u	100233398	12x60x12 mm	14.40 p/2u
100191461	12x100x1800 mm	48.23 p/u	100233499	12x100x12 mm	14.40 p/2u
pro-skirting Manhattan Cognac			pro-skirting corner Manhattan Cognac		
SAP		P/UK	SAP		P/UK
100193602	12x60x1800 mm	35.65 p/u	100233621	12x60x12 mm	14.40 p/2u
100191470	12x100x1800 mm	48.23 p/u	100233517	12x100x12 mm	14.40 p/2u

Fixing clips pro-skirting PAR-KER

SAP	P/UK
100193608 17x30 mm 50 ud	15.60 p/bag

Profile length: 1800 mm


pro-skirting Manhattan Colonial

PRO-SKIRTING PAR-KER


Decorative skirtings for PAR-KER tiles by PORCELANOSA.
LIFESTYLE design.



pro-skirting Delaware Acero



pro-skirting Delaware



pro-skirting Delaware Natural			pro-skirting corner Delaware Natural		
SAP		P/UK	SAP		P/UK
100226719	12x60x1800 mm	37.00 p/u	100233593	12x60x12 mm	14.40 p/2u
100222010	12x100x1800 mm	48.38 p/u	100233552	12x100x12 mm	14.40 p/2u
pro-skirting Delaware Nogal			pro-skirting corner Delaware Nogal		
SAP		P/UK	SAP		P/UK
100226740	12x60x1800 mm	37.00 p/u	100233612	12x60x12 mm	14.40 p/2u
100222027	12x100x1800 mm	48.38 p/u	100233536	12x100x12 mm	14.40 p/2u

Fixing clips pro-skirting PAR-KER

SAP		P/UK
100193608	17x30 mm 50 ud	15.60 p/bag

Profile length: 1800 mm

pro-skirting Delaware Acero




pro-skirting Nobu Arce

PRO-SKIRTING PAR-KER


Decorative skirtings for PAR-KER tiles by PORCELANOSA.
LIFESTYLE design.



pro-skirting Nobu Arce



pro-skirting Nobu



pro-skirting Nobu Arce

SAP	Dimensions	P/UK
100243369	12x60x1800 mm	36.60 p/u
100243412	12x100x1800 mm	49.26 p/u

pro-skirting Nobu Roble


SAP	Dimensions	P/UK
100243440	12x60x1800 mm	36.60 p/u
100243420	12x100x1800 mm	49.26 p/u

Fixing clips pro-skirting PAR-KER


SAP	Dimensions	P/UK
100193608	17x30 mm 50 ud	15.60 p/bag

Profile length: 1800 mm

Metallic profiles for skirtings. They have a high mechanical resistance with a functional, modern design. Specially recommended for office floors and raised access floors.




pro-plint stainless steel




pro-plint stainless steel

SAP		P/UK
100005635	brillante	46.93 p/u
100005636	cepillado	50.15 p/u



pro-plint anodized aluminium



pro-plint anodized aluminium

SAP		P/UK
100073104	Silver	46.72 p/u

pro-plint corner anodized aluminium

SAP		P/UK
100073105	Outer	7.71 p/u
100073106	Internal	8.47 p/u

pro-plint lateral cap

SAP		P/UK
100073107	Right	8.15 p/u
100073108	Left	5.23 p/u

pro-plint connection

SAP	P/UK
100073109	8.20 p/u



pro-plint stainless steel

Profile length: 2500 mm



ADHESIVES

CEMENT BASED ADHESIVES

one-flex +, 116 | porce-quick, 117 | super-one n, 118
super-flex S2 rapid, 120 | super-flex S2 pro, 121

ADDITIVES FOR CEMENT BASED ADHESIVES

r eco, 124 | unilax, 125

DISPERSION ADHESIVES

bt-2000 n, 126 | bt-3000 n, 127

REACTIVE RESINS ADHESIVES

politech n, 128 | politech Premium, 129

WATER-BASED ADHESIVE

linkfloor fix, 130 | skins fix, 131


POLYMER ADHESIVE

h-920, 133

FAÇADE FIXINGS

Facade fixings, 134
Concealed facade fixings, 135 | Visible facade fixings, 135

one-flex +



one-flex + flexible floor and wall tile adhesive, is a cement based, highly polymer modified, high strength, flexible tile adhesive available in white or grey. It is non-slip, water and frost-resistant and suitable for fixing a wide range of ceramic, vitrified, fully vitrified, porcelain and natural stone tiles and mosaics in interior and exterior situations. It provides enhanced adhesion to fully vitrified and porcelain tiles and to low porosity substrates.

Ideal for tiled areas which are subject to limited movement or vibration such as partition walling and plywood overlaid floors. **one-flex** is suitable for use in dry or wet duty areas, such as bathrooms, showers and swimming pools.

The adhesive exceeds the requirements of BS EN 12004:2007 for a C2TE cement based adhesive, with improved performance, excellent non-slip properties and an extended open time.

Certifications / Standards:

BS EN 12004 C2 TE



Features:

- Cement based, single component adhesive.
- Excellent adherence. Flexible.
- Fine texture mortar, with excellent mixing and application features.
- High initial adherence and no sagging.
- Extended working times. Open time higher than 30 min.
- Application thickness up to 6 mm.
- Frost-resistant.

Mixing water: 5,5 l per 20 Kg bag

Substrates:

Walls

- Sand:cement renderings
- Concrete
- Lightweight blocks
- Brickwork, dense concrete blockwork and stonework
- Plasterboard, moisture resistant plasterboard, tilebacker boards
- Gypsum plaster primed with universal bonding agent
- Glazed bricks and tiles primed with universal bonding agent
- External tiling

Floors

- Concrete
- Sand: cement screeds
- Anhydrite / hemi-hydrate screeds primed with universal bonding agent
- Heated sand:cement screeds
- Plywood overlay primed with universal bonding agent
- Existing floor tiles*
- Flooring grade asphalt – internal use primed with universal bonding agent
- Vinyl tiles primed with universal bonding agent

Recommended uses:

- Indoor large format ceramic tile coverings.
- Indoor and outdoor porcelain tile coverings.
- Floor tiles on radiant heating.
- Pools and damp environments.
- On bonded facades, replace mixing water with unilax additive.
- Especially recommended for meshed glass mosaics from L'ANTIC COLONIAL in dry areas.

Materials:

- Large format ceramics.
- Porcelain tiles with a water absorption < 0.5% as per EN-ISO 10545-3.
- Glass mosaic.
- Natural stone and marble not prone to staining.

Coverage:

- Small format and mosaic / Trowel U4: 2-3 kg/m²
- Medium format / Trowels U6-U8: 3-5 kg/m²
- Large format / Trowels U10-U12: 5-7 kg/m²

*Approximate coverage according to laboratory tests.


* super-prim improves the adherence on polished ceramics and glossy finishing tiles

Regardless of our recommendations for use indicated for this adhesive, respect the installation regulations in force in each country.

Before using this product in any application not indicated in this catalogue, please perform a test or refer to the product's technical sheet.

one-flex +				
SAP		Presentation	Europallet	P/UK
100239161	one-flex + white	bag 20 kg	54 bags/pallet	26.28 p/bag
100239160	one-flex + grey	bag 20 kg	54 bags/pallet	22.57 p/bag
100277878	r-eco	bag 250 gr		1.34 p/u

porce-quick



porce-quick is a new rapid set flexible cement based adhesive, class C2 FT as per EN 12004. Ready for traffic after 3 hours, specially recommended for quick installation and use of ceramic tiles and natural stone.

It solves the need of quick installation of any size of ceramic tile, including porcelain tiles. Ready for traffic in just 3 hours, this adhesive can be used to lay ceramic tiles and natural stone in installations where high mechanical performance is needed, such as commercial or industrial flooring or flooring with radiant heating. Waterproof and frost-resistant.

Certifications/Standards:

EN 12004 C2 FT



Features:

- Excellent adherence. Flexible.
- Bonding material, with excellent mixing and application features.
- High initial adherence and no sagging. Thixotropic.
- Extended working times. Open time higher than 30 min.
- Application thickness from 2 to 15 mm.
- Broad spectrum in the percentage of mixing water:
 - one-flex premium white
 - 30 % Excellent thixotropy
 - 38 % High wetting ability
 - one-flex premium grey
 - 24 % Excellent thixotropy
 - 32 % High wetting ability

Substrates:

Walls

- Sand : cement renders
- Brickwork, dense concrete blockwork and stonework
- Plasterboard, moisture resistant plasterboard
- Tile backer boards and waterproof composite boards
- Plywood

Floors

- Sand : cement screeds
- Heated sand:cement screeds
- Concrete
- WBP plywood
- Existing floor tiles
- On anhydrite or plaster substrates apply universal bonding agent.

Recommended uses:

- Indoor large format ceramic tile coverings.
- Indoor and outdoor porcelain tile coverings.
- High traffic floor tiles.
- Floor tiles on radiant heating.
- Pools and damp environments.
- On bonded facades, replace mixing water with unilax additive.

Materials:

- Large size ceramic tiles
- Porcelain tiles with a water absorption < 0.5% as per EN-ISO 10545-3.
- Glass mosaic.
- Natural stone and marble not prone to staining.

Coverage:

- Small format and mosaic / Trowel U4: 2-3 kg/m²
- Medium format / Trowels U6-U8: 3-5 kg/m²
- Large format / Trowels U10-U12: 5-7 kg/m²

*Approximate coverage according to laboratory tests.


Regardless of our recommendations for use indicated for this adhesive, respect the installation regulations in force in each country.

Before using this product in any application not indicated in this catalogue, please perform a test or refer to the product's technical sheet.

porce-quick				
SAP		Presentation	Europallet	P/UK
100160260	porce-quick grey	bag 20 kg	54 bags/pallet	15.86 p/bag
100160261	porce-quick white	bag 20 kg	54 bags/pallet	21.18 p/bag
100277878	r-eco	bag 250 gr		1.34 p/u

CEMENT BASED ADHESIVES

super-one n



super-one n is a type C2 FTE S1 high-performance cement based adhesive, as per EN 12004, ready for traffic after 4 hours. Specially recommended for quick installation and use of ceramic tiles and natural stone.

It solves the need of quick installation of any kind of format and ceramic tile, including porcelain tiles. Ready for traffic in just 4 hours, this adhesive can be used to lay ceramic tiles and natural stone in environments where high mechanical performance is needed, such as commercial or industrial flooring or flooring with radiant heating. Waterproof and frost-resistant.



Certifications/Standards:

Certifié CSTB Certified: CSTB 1092-228 MC 312
EN 12004 C2 FT S1

Features:

- Cement based, single component adhesive.
- Ready for traffic in just 4 hours.
- Excellent adherence. Flexible.
- Fine texture mortar, with excellent mixing and application features.
- High initial adherence and no sagging.
- Extended working times. Open time higher than 30 min.
- Application thickness up to 10 mm.
- Frost-resistant.
- Mixing water: 6.0 - 6.50 l per 25 kg bag

Recommended uses:

- Laying of ceramics in refurbishing jobs
- Floors and walls with natural stone**
- Indoor large format ceramic wall tiles
- Large format indoor and outdoor porcelain wall tiles
- Plywood substrates
- High traffic floor tiles
- Floor tiles on radiant heating
- Pools and damp environments
- On bonded facades, replace mixing water with **unilax** additive
- In marble composite floors as DQS in areas with no direct sunlight, replace mixing water by **unilax** additive

Substrates:

- Cement based screeds
- Cement render
- Concrete slabs and floors
- Anhydrite screeds, having previously applied **uniprim**
- Plasters, having previously applied **uniprim**
- Pre-existing tiles/mosaic/stones*
- Plasterboard panels
- Cement based panels
- Mixed with **unilax**, acoustic insulation **fonopac r**

Materials:

- Large format ceramic tiles
- High-absorption ceramic tiles and stoneware
- Porcelain tiles
- Glass mosaic
- Natural stone and marble not prone to staining
- Natural stone and marble prone to staining
- Mixed with unilax, DQS, and other marble agglomerate

*Approximate coverage according to laboratory tests.

Coverage:

- Small format and mosaic / Trowel U4: 2-3 kg/m²
- Medium format / Trowels U6-U8: 3-5 kg/m²
- Large format / Trowels U10-U12: 5-7 kg/m²

Regardless of our recommendations for use indicated for this adhesive, respect the installation regulations in force in each country.

***super-prim** improves the adherence on polished ceramics and glossy finishing tiles


** For slate or similar please contact the Butech technical department

Before using this product in any application not indicated in this catalogue, please perform a test or refer to the product's technical sheet.

super-one n

SAP		Presentation	Europallet	P/UK
100031188	super-one white	bag 25 kg	1000 kg/pallet	42.00 p/bag
100031189	super-one grey	bag 25 kg	1000 kg/pallet	29.52 p/bag
100277878	r-eco	bag 250 gr		1.34 p/u

super-flex S2 rapid



Single part, flexible, fibre reinforced and fast setting cement based tile adhesive, according with EN12004 C2 F S2. It is especially formulated for its enhanced adhesion and flexibility making it ideal for areas where slight movement or vibration can occur. It will take light foot traffic after 3.5 hours dependent upon temperature and substrate. For professional use.

super-flex S2 rapid incorporates a high polymer loading and can be mixed directly with water for applications onto concrete-sand render, screeds, brick and block work, heated subfloors, existing tiled surfaces and screwed and fixed over boarded wooden floors.

Certifications/Standards:
EN 12004 C2 F S2

Features:

- Cement based, single component fibre reinforced adhesive.
- Ready for traffic in just 3.5 hours.
- Excellent adherence. Flexible.
- Fine texture mortar, with excellent mixing and application features.
- High initial adherence and no sagging.
- Application thickness up to 15 mm.
- Frost-resistant.

Mixing water: 4 l per 20 kg bag

Substrates:

Walls

- Sand:cement renderings
- Concrete
- Lightweight blocks
- Brickwork, dense concrete blockwork and stonework
- Plasterboard, moisture resistant plasterboard, tilebacker boards
- WBP plywood boards
- Gypsum plaster primed with universal bonding agent
- Glazed bricks and tiles primed with universal bonding agent
- External tiling

Floors

- Concrete
- Sand: cement screeds
- Anhydrite / hemi-hydrate screeds primed with universal bonding agent
- Heated sand:cement screeds
- Plywood overlay (6 mm thick at least)primed with universal bonding agent
- Existing floor tiles*
- Flooring grade asphalt – internal use primed with universal bonding agent
- Vinyl tiles primed with universal bonding agent

Recommended uses:

- Indoor wall coverings with XLIGHT and XLIGHT PREMIUM tiles.
- Laying of ceramics in refurbishing jobs.
- Indoor large format ceramic tile coverings.
- Indoor and outdoor porcelain tile coverings.
- High traffic floor tiles.
- Floor tiles on radiant heating.
- Pools and damp environments.
- Especially recommended for XLIGHT tiles from URBATEK.

Materials:

- Large format ceramics.
- Porcelain tiles with a water absorption < 0.5% as per EN-ISO 10545-3.
- Glass mosaic.
- Natural stone and marble not prone to staining.

Coverage:

- Small format and mosaic / Trowel U4: 3 kg/m²
- Medium format / Trowels U6-U8: 3-5 kg/m²
- Large format / Trowels U10-U12: 5-7 kg/m²


*Approximate coverage according to laboratory tests.

Regardless of our recommendations for use indicated for this adhesive, respect the installation regulations in force in each country.

* **super-prim** improves the adherence on polished ceramics and glossy finishing tiles
Before using this product in any application not indicated in this catalogue, please perform a test or refer to the product's technical sheet.



super-flex S2 pro



super-flex S2 is a type C2 TE S2 high-performance adhesive, as per EN 12004, for laying all kinds of ceramic tiles on the most used substrates in the construction sector. Specially recommended for laying large format thin porcelain tiles such as URBATEK's XLIGHT. Professional use.

This adhesive has excellent an adherence and deformability performance without needing to mix with additives, with excellent use and workability conditions. Thixotropic.

Certifications/Standards:
EN 12004 C2TES2

Features:

- Cement based, single component adhesive.
- Maximum adherence and deformability.
- High initial adherence and no sagging. Thixotropic.
- Extended working times. Open time higher than 30 min.
- Application thickness up to 10 mm.
- Frost-resistant.
- Mixing water: 6.75 - 7.25 l per 25 kg bag

Substrates:

- Cement based screeds
- Cement render
- Concrete slabs and floors
- Anhydrite screeds, having previously applied uniprim
- Plasters, having previously applied **uniprim**
- Pre-existing tiles/mosaic/stones*
- Plasterboard panels
- Cement based panels acoustic insulation **fonopac r**

Coverage:

- Small format and mosaic / Trowel U4: 3 kg/m²
- Medium format / Trowels U6-U8: 3-5 kg/m²
- Large format / Trowels U10-U12: 5-7 kg/m²

*Approximate coverage according to laboratory tests.

Regardless of our recommendations for use indicated for this adhesive, respect the installation regulations in force in each country.

* **super-prim** improves the adherence on polished ceramics and glossy finishing tiles
Before using this product in any application not indicated in this catalogue, please perform a test or refer to the product's technical sheet.



super-flex S2 rapid


SAP		Presentation	Europallet	P/UK
100178221	super-flex S2 rapid grey	bag 20 kg	48 bags/pallet	35.42 p/bag
100178231	super-flex S2 rapid white	bag 20 kg	48 bags/pallet	38.55 p/bag

super-flex S2 pro

SAP		Presentation	Europallet	P/UK
100193615	super-flex S2 pro	bag 25 kg	60 kg/pallet	44.50 p/bag




r eco



r eco is the first additive for cement based adhesives that includes recycled plastic in its composition. Developed from fine PET flakes, it is incorporated into the mix of Butech's cement based adhesives, participating in the reduction of plastic contamination without affecting the performance of the bonding material. Indoor use.

r-eco includes 250 gr. of 100% recycled plastic in each 25 kg bag of adhesive, equivalent to 50 supermarket bags. With a simple gesture, if this additive were used in the laying of all the ceramics produced by PORCELANOSA, around 1,000 Tm of plastic would be recycled, reducing waste and improving the state of our planet.

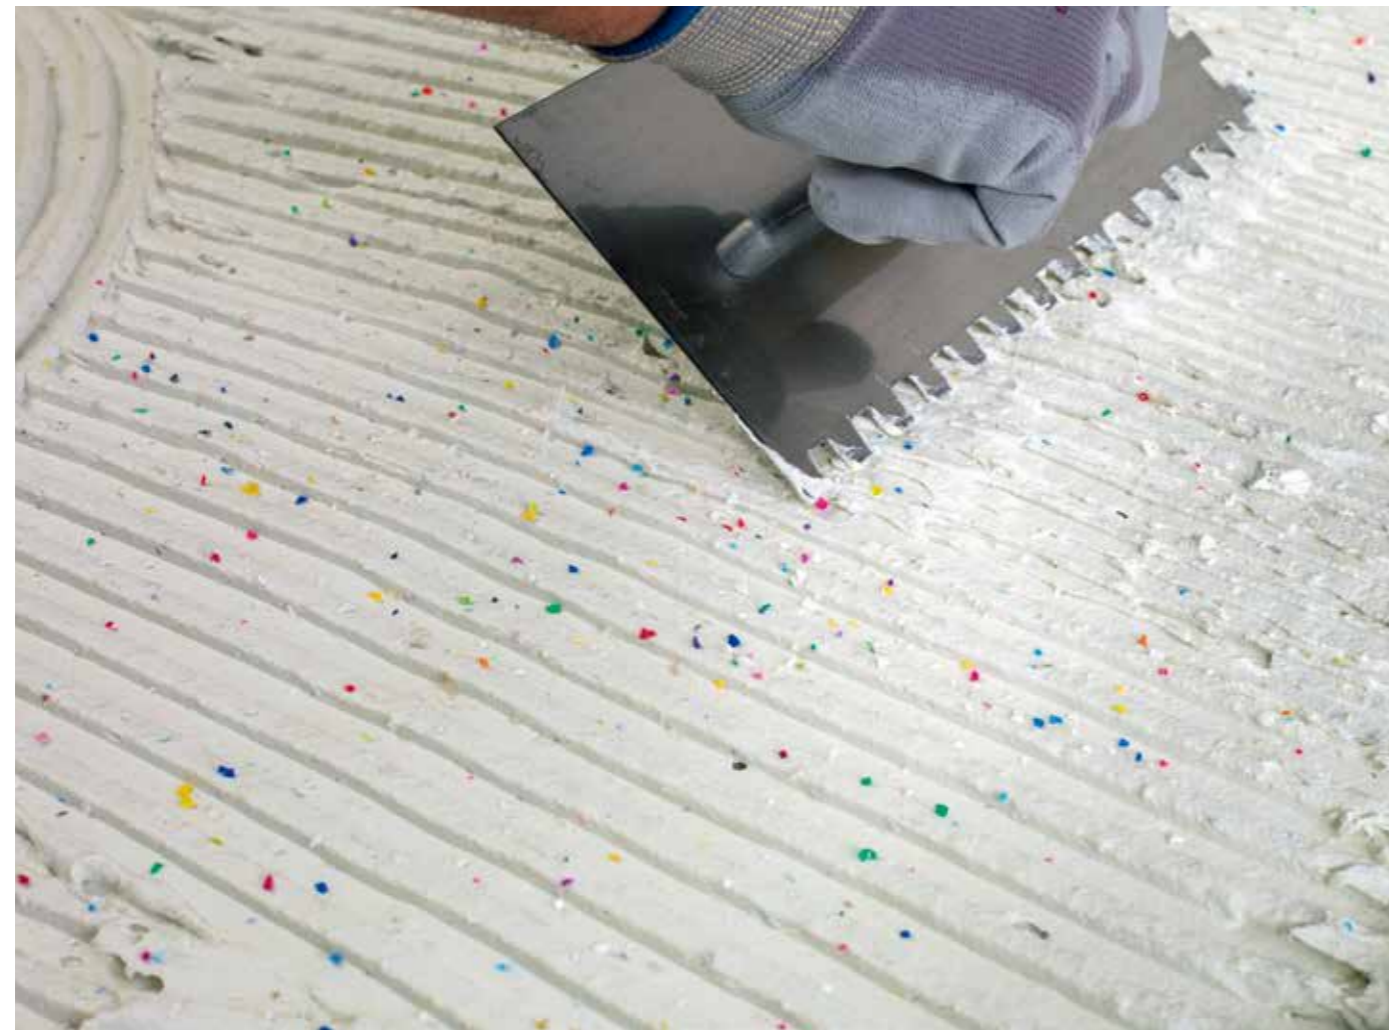

Features:

- Manufactured from PET bottles
- Origin: Post-consumption collected and treated in EC
- Particle size: < 0.2 mm
- Density: 0,575 gr/cm3
- Compatible with Butech's C2 type adhesives
- Percentage in mix: 250 gr of r-eco per 25 kg bag
- Indoor use

Compatible with the following adhesives:

- one-flex
- porce-quick
- super-one n

r eco

SAP	Presentation	P/UK
100277878	r-eco bag 250 gr	1.34 p/bag

unilax



unilax is a latex that, mixed with cement based adhesives like one-flex Premium, fr-one n or super one n, rapimax n or maxifluid improves bonding strength and flexibility up to level C2S2 as per EN 12004. Specially recommended for laying wall tiles outdoors.

A resin-based latex that can be added to cement based adhesives to enhance their bonding strength and flexibility. Specially recommended for exterior facades.



Features:

- Water-based acrylic resins latex.
- Resistant to the most common chemicals.
- Excellent resistance to UV rays and the effect of heat.
- Frost-resistant.

Recommended uses:

- Laying of tiles in facades.
- Large format ceramic floor tiles on radiant heating.
- Indoor large format ceramic tile coverings on slightly deformable substrates.
- Indoor and outdoor porcelain tile coverings.
- High traffic floor tiles.
- Pools and damp environments.

Substrates:

- Cement based screeds
- Cement render
- Concrete slabs and floors
- Anhydrite screeds, having previously applied uniprim
- Plasters, having previously applied **uniprim**
- Pre-existing tiles/mosaic/stones*
- Plasterboard panels
- Cement based panels

Materials:

- Large format ceramic tiles
- High-absorption ceramic tiles and stoneware
- Porcelain tiles
- Glass mosaic
- Natural stone and marble not prone to staining
- Natural stone and marble prone to staining
- DQS and other marble agglomerate

Coverage:

- For each cementitious adhesive, replace the water in the mixing with the same amount of **unilax**.

Regardless of our recommendations for use indicated for this adhesive, respect the installation regulations in force in each country.

* **super-prim** improves the adherence on polished ceramics and glossy finishing tiles

Before using this product in any application not indicated in this catalogue, please perform a test or refer to the product's technical sheet.

unilax

SAP	Presentation	Europallet	P/UK
100004376	unilax can 20 kg	560 kg/pallet	89.98 p/bottle
100004377	unilax can 5 kg	480 kg/pallet	25.10 p/bottle

bt-2000 n



bt-2000 n is a ready mixed acrylic wall tile adhesive. Suitable for use as a thin-bed ceramic tile adhesive and conforms to EN 12004 Type D, Class 1 TE.

Suitable for fixing all types of ceramic wall tiles, including mosaics, porcelain and vitrified tiles in internal locations such as bathrooms, kitchens and domestic shower areas. bt-2000 n can be applied to gypsum plaster, plasterboards, cement fibre boards, existing tiles, cement renders, concrete, blockwork, timber panels and plywood composite boards.

bt-2000 n acrylic based formula also gives outstanding non-slip and high grab properties. It is also mould resistant, suitable for intermittently wet conditions as such domestic showers, kitchens and bathrooms.

Certifications/Standards:

EN 12004 D1 TE

Features:

- Ready-to-use dispersion adhesive.
- Excellent adherence. Flexible.
- Shower proof.
- Non slip. High initial adherence and no sagging.
- Mould resistant.
- Fine texture adhesive, with excellent mixing and application features.
- Extended working times. Open time higher than 20 min.
- Application thickness up to 3 mm.

Recommended uses:

- Wall tiling on kitchen and bathrooms.
- Wall tiling on domestic showers.
- Wall tiling on dry partition walls: plasterboard and tile backer boards.
- Wall tiling on plaster and cement renders.
- Indoor decoration with ceramics: bath or kitchen countertops.
- Do not use in exteriors or areas subject to immersion such as swimming pools.
- Never use for floor tiles.

Substrates:

Walls

- Plaster (gypsum plaster)
- Sand: cement renderings
- Brickwork and concrete
- Plasterboard, moisture resistant plasterboard
- Fibre reinforced cement sheets
- Tile backer boards
- Existing ceramic tiles*

Materials:

- Standard format ceramic wall tiles.
- Porcelain mosaics (water absorption < 0.5% as per EN-ISO 10545-3).
- Glass mosaic.
- Natural stone and marble not prone to staining.
- Isolating panels:
 - EPS panels.
 - PS panels.
 - Mineral wool panels.

Coverage:

- Small format and mosaic / Trowel U4: 2-3 kg/m²
- Medium format / Trowels U6-U8: 3-4 kg/m²

*Approximate coverage according to laboratory tests.


Regardless of our recommendations for use indicated for this adhesive, respect the installation regulations in force in each country.

* Existing wall tiles, provided the new tile has a water absorption >10% as per EN-ISO 10545-3. Before using this product in any application not indicated in this catalogue, please perform a test or refer to the product's technical sheet.

bt-2000 n

KEA	SAP	Presentation	Europallet	P/UK
B00100006	100160255	bt-2000 n	can 10 L	44 cans/pallet 13.78 p/can

bt-3000 n



bt-3000 n ceramic wall tile adhesive, is a high performance ready-mixed water resistant high grab, non-slip wall tile adhesive. It is suitable for fixing a wide range of porous ceramic wall tiles and mosaics in interior situations.

bt-3000 n is suitable for use in dry and wet duty areas in bathrooms, showers, kitchens, utility rooms etc.

Certifications/Standards:

EN 12004 D2 T

Features:

- Ready-to-use dispersion adhesive.
- Excellent adherence. Flexible.
- Resistant to dampness-
- Fine texture adhesive, with excellent mixing and application features.
- High initial adherence and no sagging.
- Extended working times. Open time higher than 30 min.
- Application thickness up to 4 mm.

Recommended uses:

- Indoor coverings with ceramic sheets like XLIGHT.
- Laying of ceramics in refurbishing jobs.
- Indoor large format ceramic tile coverings.
- Indoor and outdoor porcelain tile coverings.
- High traffic floor tiles.
- Floor tiles on radiant heating.
- Pools and damp environments.
- Especially recommended for XLIGHT tiles from URBATEK. Suitable for DQS from L'ANTIC COLONIAL in areas not exposed to direct sunlight.

Substrates:

Walls

- Sand:cement renderings
- Concrete
- Plasterboard, moisture resistant plasterboard, tile-backer boards
- Gypsum plaster
- Glazed bricks and tiles

Materials:

- Medium and small format ceramic tiles or slabs.
- Small format porcelain tiles (water absorption < 0.5% as per EN-ISO 10545-3).
- Glass mosaic.
- Isolating panels:
 - EPS panels.
 - PS panels.
 - Mineral wool panels.

Coverage:

- Small format and mosaic / Trowel U4: 2-3 kg/m²
- Medium format / Trowels U6-U8: 3-4 kg/m²

*Approximate coverage according to laboratory tests.


Regardless of our recommendations for use indicated for this adhesive, respect the installation regulations in force in each country.

* Existing wall tiles, provided the new tile has a water absorption >10% as per EN-ISO 10545-3. super-prim improves the adherence on polished ceramics and glossy finishing tiles. Before using this product in any application not indicated in this catalogue, please perform a test or refer to the product's technical sheet.

bt-3000 n

KEA	SAP	Presentation	Europallet	P/UK
B00100001	100160253	bt-3000 n	can 10 L	48 cans/pallet 23.36 p/can

politech n



politech n is a type R2T high-tech, two-component polyurethane adhesive as per EN 12004, for laying tiles on deformable substrates. Specially recommended for special substrates like metal sheets or synthetic materials, where cement based adhesives cannot be used.

A high-tech two-component polyurethane adhesive with high performance properties. Suitable for laying ceramic tiles of all kinds on deformable substrates.



Certifications/Standards:
EN 12004 R2T

Features:

- Two-component polyurethane adhesive.
- Excellent adherence. Maximum deformability.
- No water absorption. Waterproof.
- High chemical resistance.
- High initial adherence and no sagging.
- Application thickness up to 8 mm.
- Frost-resistant.

Recommended uses:

- Laying of wall tiles not compatible with cement based adhesives
- Wall tiles on substrates not compatible with cement based adhesives
- Floor tiles on deformable substrates
- Floor tiles with special chemical resistance
- Pools and damp environments, steam rooms and spas
- Stone sheets for wall coverings as AIRSLATE by L'ANTIC COLONIAL
- Laying of slate and other natural stones with risk of deformation by water absorption.
- Interior floors as DQS by L'ANTIC COLONIAL and other marble composites
- KRION sheets

Substrates:

- Cement based screeds
- Cement render
- Concrete slabs and floors
- Anhydrite screeds
- Renders and plasterboards
- Pre-existing tiles/mosaic/stones*
- Plasterboard panels
- Cement based panels
- Wood panels
- Metal surfaces
- Polyester or PVC surfaces
- Glass surfaces

Materials:

- Large format ceramic tiles
- High-absorption ceramic tiles and stoneware
- Porcelain tiles
- XTONE and XLIGHT
- Glass mosaic
- Natural stone and marble not prone to staining
- Natural stone and marble prone to staining
- Slates and similar sensitive to contact with water
- AIRSLATE
- DQS and other marble agglomerate
- KRION and other kinds of solid surface

Coverage:


- Small format and mosaic / Trowel U3: 2 kg/m²
- Medium format / Trowels U4: 2-3 kg/m²
- Large format / Trowels U6: 3-4 kg/m²

*Approximate coverage according to laboratory tests.

Regardless of our recommendations for use indicated for this adhesive, respect the installation regulations in force in each country. Before using this product in any application not indicated in this catalogue, please perform a test or refer to the product's technical sheet.

politech n				
SAP		Presentation	Europallet	P/UK
100138260	politech n blanco	can 12 kg	576 kg/pallet	138.36 p/can

politech Premium



politech Premium is a reactive resin adhesive that is super easy to handle and easy to use, especially when we need maximum bonding strength and deformability. It is suitable for most wall coverings and substrates used in construction, ensuring the correct installation of materials such as L'ANTIC COLONIAL's AIRSLATE.

We work with it as a cement based adhesive, but with the bonding, flexibility, and water resistance capabilities of a reactive resin adhesive. Professional use.



Certifications/Standards:
EN 12004 R2T

Characteristics:

- Two-component reactive resins adhesives.
- Unbeatable workability; same as that of any cement based adhesive.
- Maximum adherence and excellent flexibility; more than 50 mm in transversal deformability.
- High wettability and long open time.
- Quick-drying: admits light traffic 6 hours after installation.
- Application thickness up to 15 mm.

Recommended use:

- Laying of wall tiles not compatible with cement based adhesives
- Wall tiles on substrates not compatible with cement based adhesives
- Floor tiles on deformable substrates
- Floor tiles with special chemical resistance
- Pools and damp environments, steam rooms and spas
- Stone sheets for wall coverings as AIRSLATE by L'ANTIC COLONIAL
- Laying of slate and other natural stones with risk of deformation by water absorption.

Substrates:

- Substrates in concrete and cement or anhydrite mortar.
- Slabs and cement mortar or gypsum rendering.
- Plasterboard and wood panels.
- Existing wall tiles*.
- Metal sheets.
- Surfaces painted with epoxy or polyurethane-based resins.

Materials:

- Large format ceramic tiles
- High-absorption ceramic tiles and stoneware
- Porcelain tiles
- XTONE and XLIGHT
- Glass mosaic
- Natural stone and marble not prone to staining
- Natural stone and marble prone to staining
- Slates and similar sensitive to contact with water
- AIRSLATE
- DQS and other marble agglomerate

Coverage:


- Small format and mosaic / Trowel U3: 2 kg/m²
- Medium format / Trowels U4: 2-3 kg/m²
- Large format / Trowels U6: 3-4 kg/m²

*Approximate coverage according to laboratory tests.

Regardless of our recommendations for use indicated for this adhesive, respect the installation regulations in force in each country. Before using this product in any application not indicated in this catalogue, please perform a test or refer to the product's technical sheet.

politech Premium				
SAP		Presentation	Europallet	P/UK
100217753	politech Premium	can 10 kg	330 kg/pallet	181.10 p/can

linkfloor fix



linkfloor fix is a solvent-free acrylic adhesive for lightweight floor coverings such as carpets, PVC, rubber or linoleum sheets, even on heavily trafficked floors. Its high performance and great versatility allow it to be used in all types of technical installations like sports venues, including walls. Professional use.

Especially recommended for installing Linkfloor floors from L'ANTIC COLONIAL.



Certifications / Standards:

IMO nautical certification

Features:

- Solvent- and odor-free adhesive
- Excellent adhesion and flexibility
- High initial grip, especially for wall applications
- Resistant to high traffic such as hospitals or airports
- Compatible with underfloor heating
- Suitable for the installation of new PVC sheets on existing PVC flooring

Recommended use:

- Non ceramic, indoor floor and wall coverings
- High traffic floor coverings.
- Floor coverings on radiant heating.

Substrates:

- Cement covered floors and walls.
- Concrete slabs.
- Plasterboards.
- Existing ceramic floor and wall coverings.
- Existing parquet floors.
- Existing PVC floors.
- On fire-resistant or water-resistant wood panels, apply super-prim

Materials:

- Decorative PVC Tiles (LVT).
- Homogeneous and multi-layer PVC (tiles or rolls).
- PVC on cork.
- Polyolefins.
- Linoleum in rolls.
- Expanded vinyls with relief.
- Semiflexible tiles.
- Carpets with or without backing.
- Carpets on foam (latex).
- Carpets with non-woven backing.
- Carpets with synthetic back (Action Back).
- Especially indicated for Linkfloor from L'ANTIC COLONIAL

Coverage:

- Wall tiles with smooth and non-embossed backs 200 – 250 gr/m²
- Wall tiles with rough backs 200 – 250 gr/m²

*Approximate coverage according to laboratory tests.

Regardless of our recommendations for use indicated for this adhesive, respect the installation regulations in force in each country.

Before using this product in any application not indicated in this catalog, please perform a test or refer to the product's technical sheet.

linkfloor fix				
SAP		Presentation	Europallet	P/UK
100243761	linkfloor fix	can 20 kg	640 kg/pallet	245.00 p/can

skins fix



skins fix is a coloured adhesive for the installation of all types of wallpapers: non-woven fabric (TNT), vinyl, duplex, light, heavy and other wallpapers. The colour indicator marks the area where the glue has been applied, facilitating the application of the wallpaper.

Especially developed for the installation of SKINS WALLPAPER from L'Ac®.



Features:

- Ready-to-use adhesive
- Pink colour during application, transparent once dry

Recommended use:

- Interior walls with all kinds of wallpapers
- Suitable for environments with the presence of humidity such as kitchens and bathrooms
- Applicable on furniture and doors
- Suitable for all types of wallpapers: light, heavy, vinyl, woven or duplex
- Laying of slate and other natural stones with risk of deformation by water absorption

Substrates:

- Supports suitable for wallpaper, sound, dry, clean, solid, smooth and absorbent

Materials:

- Suitable for all types of wallpapers: light, heavy, vinyl, woven or duplex

Coverage:

- Approximately 125 gr/m²

*Approximate coverage according to laboratory tests.

Regardless of our recommendations for use indicated for this adhesive, respect the installation regulations in force in each country.

Before using this product in any application not indicated in this catalogue, please perform a test or refer to the product's technical sheet.

skins fix			
SAP		Presentation	P/EU
100309616	skins fix	can 3 kg	22.32 p/can



h-920

h-920 is a high-performance hybrid polymer adhesive and sealant. It polymerizes in contact with environmental humidity, becoming an elastomer with extraordinary elasticity and excellent adhesion. Free of isocyanates, silicones and solvents, provides a high grip since its application, on a wide variety of materials used in construction such as ceramic or porcelain tiles, natural stone, wood or metal. Professional use.



ADHESIVES

Features:

- Hybrid polymer suitable as both adhesive and sealant.
- Maximum flexibility
- High mechanical performance
- Great initial grip; rapid skin formation and final curing.
- Excellent adhesion even on wet surfaces and immersion
- Resistant to UV radiation and atmospheric agents
- Paintable

Recommended applications:

- Interior and exterior coatings
- Direct stick adhesive, immediate hold.
- Elastic bonding in construction on galvanized sheets, ferrous or non-ferrous metals, plastic materials or polystyrene. Especially recommended for:
 - Installation of ventilated facades.
 - Installation of raised access floors
- Bonding Concept XPS panels.
- Sealing of movement joints in walls

Supports:

- All the usual supports for laying tiles

Materiales:

- Ceramic tiles and glass mosaic.
- Brick, concrete, exposed work, marble and natural stone.
- Wood panels.
- Concept XPS and other polystyrene panels.
- Metals such as aluminium, iron, zinc and galvanized.
- PVC and plastic materials.
- KRION and other types of solid surface.

Coverage:

- Approximately 2 m²/cartridge

*Approximate coverage according to laboratory tests.

Regardless of our recommendations for use indicated for this adhesive, respect the installation regulations in force in each country.

Before using this product in any application not indicated in this catalog, please perform a test or refer to the product's technical sheet.

h-920

SAP		Presentation	Packaging	P/UK
100292915	h-920 white	cartridge 290 ml	25 ud/box	12.46 p/u

bonded façade clips

These clips have been designed as a security element in bonded façades using porcelain tiles installed by the thin-layer and back-butter method. The use of cementitious adhesives type C2S2 according to EN 12004 is recommended.

Features:

- Stainless Steel clips 1.4301 (AISI 304 V2A)

Aplicaciones recomendadas:

- Installation of tiles on outdoor walls
- Installation of tiles in interiors, ceilings and cornices when a mechanical fixing system is needed

Types of clips:

- Type 1** Middle clip: joints up to 7mm
- Type 2** Perimeter clip: joints up to 7mm.
- Type 5** Clip for staggered pattern: joints up to 7mm.



Coverage:

The number of clips varies with each façade design. In the case of a regular façade without gaps, the approximate number of clips would be

Straight pattern:

Tile	Clips Type 1	Clips Type 2
59,6cm x 59,6cm	4,5	1,1
59,6cm x 120cm	2,8	0,7
59,6cm x 180cm	2,2	0,6
40cm x 80cm	5,0	1,3
80cm x 80cm	2,5	0,6
120cm x 120cm	1,7	0,4
120cm x 250cm	0,9	0,2
150cm x 300cm	0,7	0,2

Staggered pattern:

Tile	Clips Type 1	Clips Type 2	Clips Type 5
25cm x 150cm	2,7	1,6	6,4
29,4cm x 120cm	2,8	1,7	6,8

bonded façade clips

Hidden clips

Mechanical fixing system for porcelain tiles, where the clip goes into side grooves. Once the joints have been grouted, the clips become hidden without affecting the design of the façade.

Tiles from 10 to 12 mm thick and joints up to 7 mm

STON-KER, SOLIDKER, PAR-KER y HIGHKER

SAP	Description	Clip type	Size	Packaging	P/EU
100005743	Middle clip I	Type 1	40mm x 20mm x 9mm	50 pcs bag	1.53 p/u
100005744	Middle clip A/T 4cm	Type 2	40mm x 20mm x 9mm	50 pcs bag	1.53 p/u
100005745	Middle clip A/T 8cm	Type 2	80mm x 20mm x 9mm	50 pcs bag	1.70 p/u
100315264	Staggered pattern clip	Type 5	40mm x 20mm x 9mm	50 pcs bag	1.97 p/u

* Includes stainless steel screw and plug for ceramic brick or concrete

Exposed clips

Clip for bonded façades where its fastening tabs are visible after the installation of the porcelain tile. Made of stainless steel, they can be supplied lacquered in the colour that best matches the chosen tile.

Tiles from 10 to 12 mm thick and joints up to 7 mm

STON-KER, SOLIDKER, PAR-KER y HIGHKER

SAP	Description	Clip type	Size	Packaging	P/EU
100110368	Middle clip I	Type 1	40mm x 20mm x 16mm	50 pcs bag	1.52 p/u
100110369	Middle clip A/T 4cm	Type 2	40mm x 20mm x 16mm	50 pcs bag	1.70 p/u

* Ask the butech sales team about the availability of lacquered finishes matching the tile chosen

** Plug and stainless steel screw not included

8.5 mm thick tiles and joints up to 7 mm

STON-KER L

SAP	Description	Clip type	Size	Packaging	P/EU
100315272	Middle clip I	Type 1	40mm x 20mm x 13mm	50 pcs bag	0.84 p/u
100315290	Middle clip A/T 4cm	Type 2	40mm x 20mm x 13mm	50 pcs bag	0.94 p/u

* Ask the butech sales team about the availability of lacquered finishes matching the tile chosen

** Plug and stainless steel screw not included

6 mm thick tiles and joints up to 7 mm

XTONE

SAP	Description	Clip type	Size	Packaging	P/EU
100315292	Middle clip I	Type 1	40mm x 20mm x 10.5mm	50 pcs bag	0.44 p/u
100315265	Middle clip A/T 4cm	Type 2	40mm x 20mm x 10.5mm	50 pcs bag	0.54 p/u

* Ask the butech sales team about the availability of lacquered finishes matching the tile chosen

** Includes stainless steel screw and plug for ceramic brick or concrete

Coverage tables for butech's adhesives depending on the notched trowel used

ADHESIVE COVERAGE (kg / m ²)	U3	U4	U6	U8	U10	U12	Ø10
Type of adhesive	3 x 3	4 x 4	6 x 6	8 x 8	10 x 10	12 x 12	R 10 x 10
one-flex		2-3	3-4	4-5	5-6	6-7	
super-one n		2-3	3-4	4-5	5-6	6-7	
super-flex S2 rapid		2-3	3-4	4-5	5-6	6-7	
super-flex S2 pro		2-3	3-4	4-5	5-6	6-7	
porce-quick		2-3	3-4	4-5	5-6	6-7	
bt-2000 n		2-3	3-4	4-5			
bt-3000 n		2-3	3-4	4-5			
politech n	1-2	2-3	3-4	4-5			
politech Premium	1-2	2-3	3-4	4-5			
linkfloor fix	1-2	2-3	3-4				

RECOMMENDED NOTCHED TROWEL		U3	U4	U6	U8	U10	U12	Ø10
Type of ceramics	mm x mm	3 x 3	4 x 4	6 x 6	8 x 8	10 x 10	12 x 12	R 10 x 10
Wall tiles	316 x 200		x	x				
Wall tiles	316 x 446		x	x	x			
Wall tiles	316 x 592		x	x	x	x		
Wall tiles	316 x 900		x	x	x	x	x	
Wall tiles	450 x 1200		x		x	x	x	
PAR-KER	215 x 659		x	x	x	x		
PAR-KER	143 x 900		x		x	x		
PAR-KER	220 x 900		x		x	x		
PAR-KER	193 x 1200		x		x	x	x	x
PAR-KER	294 x 1200		x		x	x	x	x
PAR-KER	250 x 1500		x		x	x	x	x
PAR-KER	193 x 1800		x		x	x	x	x
PAR-KER	294 x 1800		x		x	x	x	x
URBATEK	297 x 596		x	x	x	x		
URBATEK	400 x 400		x	x	x	x		
STON-KER	443 x 443		x	x	x	x		
STON-KER	435 x 659		x		x	x	x	x
STON-KER	450 x 900		x		x	x	x	x
STON-KER / URBATEK	596 x 596		x		x	x	x	x
STON-KER / URBATEK	800 x 800		x		x	x	x	x
STON-KER / URBATEK	596 x 1200		x			x	x	x
STON-KER / URBATEK	1200 x 1200		x			x	x	x
XLIGHT	1000 x 3000	x	x		x	x	x	
XLIGHT Premium	1200 x 1200	x	x		x	x	x	
XLIGHT Premium	1200 x 2500	x	x		x	x	x	
XLIGHT Premium	1500 x 3200	x	x		x	x	x	
MOSAICS		x	x	x				
AIRSLATE	1200 x 2400		x	x				

x Recommended trowel with standard conditions



Selection tables for butech's adhesives



		bt-2000 n	bt-3000 n	one-flex +
		Ready Mixed Adhesives		
Product Features		Ready Mixed High Grab	High Performance Ready Mixed	High-Tech Flexible Adhesive
Specification	Wall and Floor	Wall	Wall	Wall & Floor
	Bed Thickness	1-3mm	1-4mm	3-12mm
	Open Time	20Mins*	30Mins*	30Mins*
	Light Foot Traffic	No	No	24Hours*
	Conforms to	EN 12004 Class D1TE	EN 12004 Class D2T	EN 12004 Class C2TE
	Colour	Off-White	Off-White	White & Grey
	Pack Size	15kg	15kg	20kg
Wall	Gypsum Plaster	Yes	Yes	Priming with U.B.A.
	Gypsum Plaster Board	Yes	Yes	Yes
	Concrete Render	Yes	Yes	Yes
	Brick/Block work	Yes	Yes	Yes
	Fixed Plywood	Yes	Yes	Priming with U.B.A.
Existing Tile Surface	Contact Technical Support	Contact Technical Support	Priming with U.B.A.	
Floor	Cement Screed/Levelling Compound	No	No	Yes
	Concrete Sub-base	No	No	Yes
	Anhydrite Screed	No	No	Priming with U.B.A.
	Floor Graded Asphalt	No	No	Priming with U.B.A.
	Underfloor Heating	No	No	Yes
	Ceramic/Stone/Terrazzo	No	No	Priming with U.B.A.
	Metal/Steel	No	No	No
	WBP Plywood Overlay (>15mm)	No	No	No
	Chipboard (22mm)	No	No	>15mm
	Tongue and Groove	No	No	No
Types of Tile	Ceramic	Yes	Yes	Yes
	Vitreous	Yes	Yes	Yes
	Porcelain	Contact Technical Support	Contact Technical Support	Yes
	Terazzo	No	No	Yes
	Glass	Contact Technical Support	Contact Technical Support	Yes
	Natural Stone	Contact Technical Support	Contact Technical Support	Contact Technical Support

M40 specification service available for PORCELANOSA clients. Please, contact your PORCELANOSA representative for terms and conditions.

Note: The information provided above is intended as a general guide only and can not fully reflect all conditions that can influence the success of a particular application. For comprehensive application specific advice or additional queries, please contact our technical support team on butech.uk@butech.es

		porce-quick	super-one n	super-flex S2 rapid	super-flex S2 pro	
		Cementitious Adhesives				
Product Features		Rapid Set Flexible Adhesive	Rapid Set Flexible Tile Adhesive	Rapid Set Flexible Fibre Reinforced Tile Adhesive	High performance Flexible Adhesive	
Specification	Wall & Floor	Wall & Floor	Wall & Floor	Floor	Wall	
	Bed Thickness	3-12mm	3-10mm	3-20mm	3-10 mm	
	Open Time	20Mins*	30Mins*	20Mins*	30 min*	
	Light Foot Traffic	3Hours*	4Hours*	3.5Hours*	24 hours*	
	Conforms to	EN 12004 Class C2FT	EN 12004 Class C2FT S1	EN 12004 Class C2F S2	EN 12004 Class C2 TE S2	
	Colour	White & Grey	White & Grey	Grey	White	
	Pack Size	20kg	25kg	20 kg	25 Kg	
	Wall	Gypsum Plaster	Priming with U.B.A.	Priming with U.B.A.	No	Priming with U.B.A.
		Gypsum Plaster Board	Yes	Yes	No	Yes
		Concrete Render	Yes	Yes	No	Yes
Brick/Block work		Yes	Yes	No	Yes	
Fixed Plywood		Priming with U.B.A.	Priming with U.B.A.	No	Yes	
Existing Tile Surface		Yes	Yes	No	Yes	
Cement Screed/Levelling Compound		Yes	Yes	Yes	No	
Concrete Sub-base		Yes	Yes	Yes	No	
Anhydrite Screed		Priming with U.B.A.	Priming with U.B.A.	Priming with U.B.A.	No	
Floor Graded Asphalt		Priming with U.B.A.	Yes	Yes	No	
Underfloor Heating	Yes	Yes	Yes	No		
Ceramic/Stone/Terrazzo	Yes	Yes	Yes	No		
Metal/Steel	No	No	No	No		
WBP Plywood Overlay (>15mm)	>15mm	>15mm	>6mm	No		
Chipboard (22mm)	>15mm	>15mm	>6mm	No		
Tongue and Groove	No	No	Yes	No		
Types of Tile	Ceramic	Yes	Yes	Yes	Yes	
	Vitreous	Yes	Yes	Yes	Yes	
	Porcelain	Yes	Yes	Yes	Yes	
	Terazzo	Yes	Yes	Yes	Yes	
	Glass	Yes	Yes	Yes	Yes	
	Natural Stone	Contact Technical Support	Contact Technical Support	Contact Technical Support	Contact Technical Support	

M40 specification service available for PORCELANOSA clients. Please, contact your PORCELANOSA representative for terms and conditions.

Note: The information provided above is intended as a general guide only and can not fully reflect all conditions that can influence the success of a particular application. For comprehensive application specific advice or additional queries, please contact our technical support team on butech.uk@butech.es



GROUTING MATERIAL AND ELASTIC SEALANTS

CEMENT-BASED MATERIALS FOR TILE JOINTS

colorstuk rapid n, **142** | colorstuk 0-4 n, **143** | colorstuk n especial, **144**

ADDITIVES FOR CEMENT-BASED JOINTS

cl-stuk, **145**

EPOXY GROUTING MATERIALS

epotech aqua, **146** | epotech nature, **147** | epotech crystal, **148**
epoxy cleaning kit, **149** | epotech cleaner, **149** | epoxy sponge, **149**


ELASTIC JOINT SEALANTS

s-107 n, **152** | s-502 n, **153** | p-404, **155**

LEVELING SYSTEM FOR CERAMIC TILES

self-leveling spacers, **156**

colorstuk rapid n



colorstuk rapid n is a type CG2 WA high-performance, cement-based grouting material as per EN 13888, for grouting joints up to 15 mm. Suitable for all kinds of ceramic tiles and natural stone, it is specially recommended for outdoor applications and permanently damp environments .

A high-tech, fine grained colored mortar with fast setting and hardening times for grouting tile joints up to 15 mm. Suitable for all kinds of ceramic tiles and natural stone. Indoors and outdoors.



Certifications/Standards:
EN 13888 CG2 WA

Features:

- Cement-based, single-component, colored mortar.
- Fine texture mortar for grouting tile joints up to 15 mm.
- Mortar with fast setting and hardening times.
- It prevents efflorescences.
- Excellent mechanical resistance.
- Resistant to heat and UV radiation.
- Frost-resistant.
- Waterproof mortar.
- Anti-mold action.
- Easy to apply and clean.
- Wide color range.
- Mixing water: colorstuk rapid n 1-1,3 l per 5 kg bag.

Recommended uses:

- Tile joints up to 15 mm.
- Indoor wall and floor tiles.
- Outdoor floors and terraces.
- High traffic floor tiles.
- Floor tiles on radiant heating.
- Pools and damp environments.
- Outdoor wall tiles in facades.

Substrates:

- All usual substrates for ceramic tiles laying.

Coverage:

- See the grouting materials table on page 150

Materials:


- Absorbent and non-absorbent ceramic tiles, including porcelain tiles.
- Tiles with mosaic-like patterns.
- Glass mosaic.
- Clay and terracotta tiles.
- Natural stone and marble not prone to staining.

colorstuk rapid n					
SAP			Presentation	Europallet	P/UK
100236463	blanco		bag 5 kg	400 kg/pallet	19.96 p/bag
100275760	perla		bag 5 kg	400 kg/pallet	22.65 p/bag
100236834	gris		bag 5 kg	400 kg/pallet	19.31 p/bag
100236808	beige		bag 5 kg	400 kg/pallet	23.01 p/bag
100309550	oak		bag 5 kg	400 kg/pallet	24.43 p/bag
100236794	marfil		bag 5 kg	400 kg/pallet	22.71 p/bag
100236833	caramelo		bag 5 kg	400 kg/pallet	20.19 p/bag
100236809	marron		bag 5 kg	400 kg/pallet	17.02 p/bag
100236823	tabaco		bag 5 kg	400 kg/pallet	22.76 p/bag
100236824	moka		bag 5 kg	400 kg/pallet	18.26 p/bag
100236464	manhattan		bag 5 kg	400 kg/pallet	18.27 p/bag
100236449	cemento		bag 5 kg	400 kg/pallet	15.93 p/bag
100236481	antracita		bag 5 kg	400 kg/pallet	16.40 p/bag
100236475	negro		bag 5 kg	400 kg/pallet	20.19 p/bag

The colours shown are approximate and may vary for printing reasons.

Before using this product in any application not indicated in this catalogue, please perform a test or refer to the product's technical sheet.

colorstuk 0-4 n



colorstuk 0-4 n is a type CG2 WA fine grain grouting material as per EN 13888, for grouting joints up to 4 mm. It is easy to apply, resistant and color stable, and it is specially recommended for rectified tiles.

A high-tech, fine grained colored mortar for grouting tile joints from 0 to 4 mm. Suitable for all kinds of ceramic tiles and natural stone. Indoors and outdoors.



Certifications/Standards:
EN 13888 CG2 WA

Features:

- Cement-based, single-component, colored mortar.
- Fine texture mortar for grouting tile joints up to 4 mm.
- Easy to apply and clean.
- Resistant to heat and UV radiation.
- Frost-resistant.
- Wide color range.
- Mixing water: colorstuk 0-4 n 1,5 l per 5 kg bag.

Recommended uses:

- Tile joints up to 4 mm.
- Indoor wall tile coverings. Specially recommended for rectified tiles.
- Indoor floor tiles, including public buildings.

In the following applications, replace mixing water by cl-stuk additive:

- Outdoor floors.
- High traffic floor tiles.
- Floor tiles on radiant heating.
- Pools and damp environments.

Substrates:

- All usual substrates for ceramic tiles laying.

Coverage:

- See the grouting materials table on page 150

Materials:

- Absorbent and non-absorbent ceramic tiles, including porcelain tiles.
- Glass mosaic.
- Natural stone and marble not prone to staining.

In the following applications, replace mixing water by cl-stuk additive:


- Wall tiles with mosaic-like patterns.
- DQS slabs and other kinds of marble agglomerate.

colorstuk 0-4 n					
SAP			Presentation	Europallet	P/UK
100236442	blanco		bag 5 kg	400 kg/pallet	8.89 p/bag
100275725	perla		bag 5 kg	400 kg/pallet	10.65 p/bag
100236806	gris		bag 5 kg	400 kg/pallet	11.75 p/bag
100236419	beige		bag 5 kg	400 kg/pallet	14.11 p/bag
100236480	marfil		bag 5 kg	400 kg/pallet	7.94 p/bag
100236446	marrón		bag 5 kg	400 kg/pallet	9.42 p/bag
100236807	moka		bag 5 kg	400 kg/pallet	10.79 p/bag
100236461	manhattan		bag 5 kg	400 kg/pallet	6.97 p/bag
100236462	cemento		bag 5 kg	400 kg/pallet	9.42 p/bag
100236409	antracita		bag 5 kg	400 kg/pallet	9.42 p/bag
100236472	negro		bag 5 kg	400 kg/pallet	13.27 p/bag

The colours shown are approximate and may vary for printing reasons.

Before using this product in any application not indicated in this catalogue, please perform a test or refer to the product's technical sheet.

colorstuk especial n



colorstuk especial n is a type CG2 WA very fine grain grouting material as per EN 13888, for grouting joints up to 4 mm. Its formula includes ultrafine aggregates, which make it specially recommended for tiles with a glaze sensitive to scratching.

A high-tech, fine grained colored mortar for grouting tile joints up to 4 mm. Specially recommended for grouting rectified ceramic tiles sensible to scratching, and ceramic parquet flooring



Certifications/Standards:
EN 13888 CG2 WA

Features:

- Cement-based, single-component, colored mortar.
- Ultrafine aggregates formula.
- Fine texture mortar for grouting tile joints up to 4 mm.
- Easy to apply and clean.
- Resistant to heat and UV radiation.
- Frost-resistant.
- Wide special colors range.
- Mixing water:
colorstuk especial n 0,64 l per 2 Kg bag.

Substrates:

- All usual substrates for ceramic tiles laying.

Coverage:

- See the grouting materials table on page 150

Recommended uses:

- Tile joints up to 4 mm.
- Ceramic tiles with low hardness glaze as per Mohs scale.
- Indoor wall tile coverings. Specially recommended for rectified tiles.
- Indoor floor tiles, including public buildings.

In the following applications, replace mixing water with **cl-stuk** additive:

- Wall and floor tiles into direct contact with water.
- Floor tiles on radiant heating.

Materials:

- Absorbent and non-absorbent ceramic tiles.
- Ceramic tiles with special finishes.
- Glass mosaic.
- Natural stone and marble not prone to staining.
- Do not use on polished materials.

In the following applications, replace mixing water by **cl-stuk** additive:


- Wall tiles with mosaic-like patterns.
- DQS slabs and other kinds of marble agglomerate.

colorstuk especial n

SAP	Color	Presentation	Europallet	P/EU
100238236	white	bag 2 kg	432 kg/pallet	6.23 p/bag
100238229	vainilla	bag 2 kg	432 kg/pallet	6.23 p/bag
100204255	oak	bag 2 kg	432 kg/pallet	5.70 p/bag
100204261	honey	bag 2 kg	432 kg/pallet	5.84 p/bag
100243281	iroko	bag 2 kg	432 kg/pallet	6.58 p/bag
100234451	elm	bag 2 kg	432 kg/pallet	6.44 p/bag
100243271	maple	bag 2 kg	432 kg/pallet	5.21 p/bag
100204254	beech	bag 2 kg	432 kg/pallet	5.60 p/bag
100238261	moka	bag 2 kg	432 kg/pallet	6.20 p/bag
100234433	wenge	bag 2 kg	432 kg/pallet	4.61 p/bag
100204260	doussie	bag 2 kg	432 kg/pallet	6.06 p/bag
100238235	nacare	bag 2 kg	432 kg/pallet	6.44 p/bag
100238260	graphite	bag 2 kg	432 kg/pallet	9.38 p/bag
100204245	ash	bag 2 kg	432 kg/pallet	5.60 p/bag
100204554	antracita	bag 2 kg	432 kg/pallet	6.26 p/bag
100238251	dark	bag 2 kg	432 kg/pallet	9.10 p/bag

The colours shown are approximate and may vary for printing reasons.

cl-stuk



cl-stuk is a latex which mixed with cement-based grouts like colorstuk, reduces water absorption and enhances mechanical resistance and deformability. Specially recommended when laying ceramic outdoors and in permanently damp environments.

A latex additive that can be mixed with the colorstuk range of high-tech grout mortars in cases when increased mechanical resistance, reduced water absorption or improved flexibility is required.



Features:

- Water-based acrylic resins latex.
- Resistant to the most common chemicals.
- It reduces mortar water absorption.
- It enhances the adherence and deformability of the grouting material.
- It increases resistance to abrasion.
- Excellent resistance to UV rays and the effect of heat.
- Frost-resistant.

Coverage:

Product	%	Liters	Kg/bag
colorstuk 0-4 n	30 %	1,5	5
colorstuk especial n	32 %	0,64	2

Recommended uses:

- Specially recommended in:
- Outdoor floor and wall tiles.
 - High traffic floor tiles.
 - Floor tiles on radiant heating.
 - Pools and damp environments.

It enhances grouting material performance in:

- Indoor wall tile coverings. Specially recommended for rectified tiles.
- Indoor floor tiles, including public buildings.

Materials:

Specially recommended in:

- Wall tiles with mosaic-like patterns.
- DQS slabs and other kinds of marble agglomerate.

It enhances grouting material performance in:


- Absorbent and non-absorbent ceramic tiles, including porcelain tiles.
- Glass mosaic.
- Natural stone and marble not prone to staining.

cl-stuk

SAP	Product	Presentation	Europallet	P/EU
100004374	cl-stuk	can 2 kg	448 kg/pallet	7.46 p/bottle
100004375	cl-stuk	can 5 kg	480 kg/pallet	17.76 p/bottle

Before using this product in any application not indicated in this catalogue, please perform a test or refer to the product's technical sheet.

epotech aqua



epotech aqua is a new line of epoxy putties for grouting tile joints. Two-component epoxy putty with no organic solvents. It is waterproof, it has outstanding chemical and mechanical properties and it is easy to apply. Specially recommended for application on mosaics and ceramic tiles with relief.

This material is suitable for grouting joints from 0 to 10 mm in floor and wall tiles, indoors and out. Excellent resistance to chemicals. Suitable for pools and permanently damp environments. Suitable as high adherence grouting material for ceramic tiles with any absorption level and format, for glass mosaic or natural stone.



Features:

- Two-component colored epoxy putty.
- Easy to apply and clean. This product is free of organic solvents and plasticizers
- Excellent joint color stability.
- Resistance to most chemicals and alkali, even in high concentrations.
- Waterproof joint, no water absorption.
- Excellent adherence and mechanical resistance.
- Tile joints up to 10 mm.
- Wide color range.

Recommended use:

- Tile joints with uniform color and shade, resistant to the passing of time.
- Floorings with built-in heating.
- Pools and damp environments.
- High traffic floor tiles
- Outdoor floorings protected against the presence of rising moisture
- Floorings and wall coverings in direct contact with chemicals. See technical sheet.

Substrates:

- All usual substrates for ceramic tiles laying.

Coverage:

- See the grouting materials table on page 150

Materials:


- Absorbent and non-absorbent ceramic tiles, including porcelain tiles.
- Tiles with mosaic-like patterns. Please refer to PORCELANOSA catalogues.
- Glass mosaic.
- Natural stone and marble not prone to staining.

epotech aqua					
SAP			Presentation	Europallet	P/EU
100182223	blanco		can 1,5 kg	315 kg/pallet	19.52 p/can
100182217	marfil		can 1,5 kg	315 kg/pallet	19.24 p/can
100278474	tabaco		can 1,5 kg	315 kg/pallet	22.92 p/can
100182222	beige		can 1,5 kg	315 kg/pallet	17.48 p/can
100182208	gris		can 1,5 kg	315 kg/pallet	19.24 p/can
100278467	manhattan		can 1,5 kg	315 kg/pallet	22.92 p/can
100278329	cemento		can 1,5 kg	315 kg/pallet	22.92 p/can
100182213	antracita		can 1,5 kg	315 kg/pallet	19.24 p/can
100278500	negro		can 1,5 kg	315 kg/pallet	22.92 p/can

The colours shown are approximate and may vary for printing reasons.

Before using this product in any application not indicated in this catalogue, please perform a test or refer to the product's technical sheet.

epotech nature



epotech nature is a new micro grain porcelain grout for the sealing of joints in ceramic tiles with designs inspired by nature. It has been specially developed for porcelain tiles that reproduce the appearance and texture of wood, such as PORCELANOSA Group's PAR-KER. Professional use.

This material is suitable for grouting tile joints up to 10 mm. in floorings and wall coverings, both indoors and outdoors. Excellent resistance to chemicals. Suitable for pools and permanently damp environments. Suitable as high adherence grouting material for ceramic tiles with any absorption level and format, for glass mosaic, or natural stone.



Characteristics:

- Two-component colored epoxy putty.
- Easy to apply and clean. This product is free of organic solvents and plasticizers.
- Excellent joint color stability.
- Resistance to most chemicals and alkali, even in high concentrations.
- Waterproof joint, no water absorption.
- Excellent adherence and mechanical resistance. Hypoallergenic and bacteriostatic.
- Tile joints up to 10 mm.
- Wide range of colors inspired by natural woods.

Recommended use:

- Floorings and wall coverings in natural wood-inspired ceramics.
- Tile joints with uniform color and shade, resistant to the passing of time.
- Floorings with built-in heating.
- Pools and damp environments.
- High traffic floor tiles
- Outdoor floorings protected against the presence of rising moisture
- Floorings and wall coverings in direct contact with chemicals. See technical sheet.

Substrates:

- All usual substrates for laying ceramic tiles.

Coverage:

- See the grouting materials table on page 150

Materials:


- Ceramic tiles with designs inspired by nature
- Absorbent and non-absorbent ceramic tiles, including porcelain tiles.
- Tiles with mosaic-like patterns. Please refer to PORCELANOSA catalogues.
- Glass mosaic.
- Natural stone and marble not prone to staining.

epotech nature					
SAP			Presentation	Europallet	P/EU
100177504	ash		can 1,5 kg	315 kg/pallet	19.03 p/can
100177514	maple		can 1,5 kg	315 kg/pallet	19.03 p/can
100177494	beech		can 1,5 kg	315 kg/pallet	19.03 p/can
100204262	honey		can 1,5 kg	315 kg/pallet	19.03 p/can
100177484	oak		can 1,5 kg	315 kg/pallet	19.03 p/can
100177505	iroko		can 1,5 kg	315 kg/pallet	19.03 p/can
100177513	elm		can 1,5 kg	315 kg/pallet	19.03 p/can
100177512	doussie		can 1,5 kg	315 kg/pallet	19.03 p/can
100177485	wenge		can 1,5 kg	315 kg/pallet	19.03 p/can

The colours shown are approximate and may vary for printing reasons.

Before using this product in any application not indicated in this catalog, please carry out a test or refer to the product's technical sheet.

epotech crystal



epotech crystal is an epoxy putty for grouting tile joints. Two-component putty with a translucent finish. It reflects the color of the tile or mosaic surrounding the joint. It features all the properties of epoxy putties: watertightness, high resistance to chemicals and mechanical properties. Specially recommended for application on mosaics and ceramic tiles with relief. Extra fine, micro grain porcelain grout.

This material is suitable for grouting joints up to 5 mm in floor and wall tiles indoors. Excellent resistance to chemicals in high concentrations. Suitable for permanently damp environments.



Certifications/Standards:
EN 13888 RG

Features:

- Extra fine, micro grain porcelain grout.
- Easy to apply and clean epoxy putty.
- Translucent appearance.
- High resistance to most acids and alkali, even in high concentrations.
- Waterproof joint, no water absorption.
- Excellent adherence and mechanical resistance.
- Prevents the development of fungi and bacteria.
- Tile joints up to 5 mm.

Recommended uses:

- Wall and floor tiles with minimum joint.
- Indoor floor and wall tiles.
- Mosaic or natural stone wall coverings.
- Wall tiles and mosaics with glass elements.
- PAR-KER floor coverings.
- Technical, porcelain floor coverings.

Substrates:

- All usual substrates for ceramic tiles laying.

Coverage:


- See the grouting materials table on page 150

Materials:

- Absorbent and non-absorbent ceramic tiles, including porcelain tiles.
- Glass mosaic.
- Wall tiles and mosaics with glass elements.
- Natural stone and marble not prone to staining.

epotech crystal			
SAP	Presentation	Europallet	P/EU
100126899	can 3 kg	295 kg/pallet	24.82 p/can

Epoxy cleaning kit



Cleaning kit for epoxy joint remains before their final hardening. It includes an epotech cleaner bottle, water-based detergent for cleaning off epoxy putties remains and stains..


It includes:

- 1 MMC handle epotech trowel
- 1 Epoxy sponge
- 1 Float for final cleaning + 3 scourers
- 1 200 ml epotech cleaner bottle



Epoxy cleaning kit	
SAP	P/EU
100113684	71.15 p/kit

epotech cleaner



Water-based detergent for cleaning epoxy putties remains and stains. Specially recommended for cleaning remains of epotech aqua. Professional use.


Recommended uses:

- Cleaning of epoxy putties remains and films on ceramic tiles, glass mosaics and natural stones.



epotech cleaner		
SAP	Presentation	P/EU
100120428	bottle 500 ml	22.46 p/bottle

Epoxy sponge



Cellulose cleaning sponge for epoxy joints


- Cleaning epoxy joints
- 100% vegetable cellulose sponge
- 1 unit



Esponja epoxy	
SAP	P/EU
100085287	11.78 p/u



s-107 n



s-107 n is a neutral silicone putty for sealing joints. Specially recommended for sealing movement joints. Indoor and outdoor use.

This putty crosslinks in contact with dampness and does not give off odors, thus becoming an elastomer highly elastic and resistant to atmospheric agents.



Features:

- Single-component neutral silicone.
- High elasticity.
- Good adherence.
- Resistant to UV rays.
- Frost-resistant.

Recommended uses:

- Sealing joints even between materials sensible to chemical attack.
- Sealing movement joints in floors and walls.
- Sealing joints in ceramics, glass, metal and plastics.
- Sealing perimeter joints in wall tile coverings.
- Gluing ceramic materials on wood boards.

Substrates:

- All usual substrates for ceramic tiles laying.

Coverage:

- Joint de 2 x 2 mm 75.0 m
- Joint de 3 x 3 mm 33.3 m
- Joint de 5 x 3 mm 20.0 m
- Joint de 5 x 5 mm 12.0 m
- Joint de 8 x 4 mm 8.3 m


$$\text{Coverage} = \frac{300}{\text{joint width (mm)} \times \text{joint depth (mm)}} \text{ (ml/cartridge)}$$

s-107 n					
SAP			Presentation	Packaging	P/EU
100005814	blanco		cartridge 300 ml	25 ud/box	8.75 p/u
100005815	transparente		cartridge 300 ml	25 ud/box	7.44 p/u
100120621	marfil		cartridge 300 ml	25 ud/box	8.74 p/u
100120624	tabaco		cartridge 300 ml	25 ud/box	8.74 p/u
100115950	beige		cartridge 300 ml	25 ud/box	8.75 p/u
100005816	gris		cartridge 300 ml	25 ud/box	8.75 p/u
100120620	cemento		cartridge 300 ml	25 ud/box	8.74 p/u
100120608	antracita		cartridge 300 ml	25 ud/box	8.74 p/u
100005817	negro		cartridge 300 ml	25 ud/box	8.75 p/u

The colours shown are approximate and may vary for printing reasons.

Before using this product in any application not indicated in this catalogue, please perform a test or refer to the product's technical sheet.

s-502



s-502 is a high-performance acetic silicone putty for sealing joints. Specially recommended for sealing joints in bathrooms and for sealing perimeter joints in wall tile coverings. It has anti-fungal properties that prevent the appearance of black spots in damp environments.

This reticular putty, when in contact with dampness gives off acetic acid, thus becoming an extraordinary elastic and resistant elastomer to atmospheric agents. Indoor use.



Features:

- Single-component acetic silicone.
- High elasticity. Can withstand movements up to 20% of the sealed joint width.
- Excellent adherence.
- Resistant to UV rays.

Recommended uses:

- Sealing joints in ceramics, glass, metal, plastics and painted surfaces.
- Sealing joints between ceramic wall coverings and ceramic bathroom fixtures, bathtubs, showers, or countertops in kitchens and bathrooms.
- Sealing perimeter joints in wall tile coverings.
- Sealing glass and woodwork.
- Sealing and gluing bathroom elements such as screens and cabins.
- Gluing ceramic materials on wood boards.

Substrates:

- Do not use on substrates which are sensible to the action of acids:
- Screeds and floors with cement mortar.
- Concrete

Coverage:

- 2 x 2 mm joint 77,5 m
- 3 x 3 mm joint 31,4 m
- 5 x 3 mm joint 20,6 m
- 5 x 5 mm joint 12,4 m
- 8 x 4 mm joint 8,6 m
- 8 x 6 mm joint 6,4 m


$$\text{Coverage} = \frac{310}{\text{joint width (mm)} \times \text{joint depth (mm)}} \text{ (ml/cartridge)}$$

s-502				
SAP		Presentation	Packaging	P/EU
100005809	transparente	cartridge 310 ml	24 ud/box	8.66 p/u
100005808	blanco	cartridge 310 ml	24 ud/box	8.25 p/u

Before using this product in any application not indicated in this catalogue, please perform a test or refer to the product's technical sheet.



p-404



p-404 is polyurethane putty for sealing joints. Specially recommended for sealing movement joints outdoors. Indoor and outdoor use.,

This reticular putty in contact with dampness does not give off odors, thus becoming an extraordinary adherent, elastic and resistant elastomer to atmospheric agents.



Features:

- Single-component polyurethane putty.
- High elasticity.
- High adherence.
- Resistant to UV rays.
- Frost-resistant.

Recommended uses:

- Sealing joints even between materials sensible to chemical attack.
- Sealing movement joints in floors and walls.
- Bonding of building materials like ceramics, concrete, roof tiles, wood, aluminium, polyester or PVC.
- Gluing ceramic materials on metal or wood boards.
- Gluing Concept XPS panels.

Substrates:

- All usual substrates for ceramic tiles laying.

Materials:

- Ceramic tiles and glass mosaic.
- Glass.
- Metal.
- Plastic material, PVC.
- Concrete slabs.
- Wood.
- Concept XPS panels.

Coverage:


- 2 x 2 mm joint 75 m
- 3 x 3 mm joint 33,33 m
- 5 x 3 mm joint 20 m
- 5 x 5 mm joint 12 m
- 8 x 4 mm joint 9,37 m
- 8 x 6 mm joint 6,25 m

$$\text{Coverage} = \frac{300}{\text{joint width (mm)} \times \text{joint depth (mm)}} \text{ (ml/cartridge)}$$

p-404				
SAP		Presentation	Packaging	P/EU
100005818	blanco	cartridge 310 ml	25 ud/box	6.95 p/u
100005819	gris	cartridge 310 ml	25 ud/box	6.78 p/u
100005820	negro	cartridge 310 ml	25 ud/box	7.78 p/u

Before using this product in any application not indicated in this catalogue, please perform a test or refer to the product's technical sheet.

self-leveling spacers



Leveling system for ceramic tiles. Eases ceramic tile laying and guarantees a perfectly flat surface of the final installation. The system consists of a new type of spacer with adjustable height that levels the surrounding tiles and prevents them from moving.

Specially recommended when tile, design or use features demand a perfect finish, with an even, seamless surface.

Features:

- Guarantees tiles are even.
- Prevents tiles from moving due to laying errors or due to mortar setting.
- Reduces retouching and laying times.
- Suitable for 0,5-5 mm wide joints.
- Suitable for floor and wall tiles of thickness between 7-15 mm. For thinner tiles use the supplementary lifting pieces
- The system consists of a spacer, a wedge and an adjusting tool.
- Wedges are recoverable, only the spacers are consumed.

Recommended uses:


- Wall and floor tiles with minimum joint.
- Large format floor tiles.
- Laying of rectified wall tiles.
- Tiles with reduced thickness: XLIGHT and XTONE
- Interlocking floor designs.
- Glued facades.
- Essential to place the ceramic by the method of thin layer and double gluing of the pieces

Substrates:

- All usual substrates for ceramic tiles laying.


Materials:

- Before using the self-levelling spacers system, carry out a preliminary test with the type of wall or floor tiles to be installed and check that the tile is not damaged during the removal of the spacer, especially in textured or rectified tiles without bevelling and mosaics with 3D texture

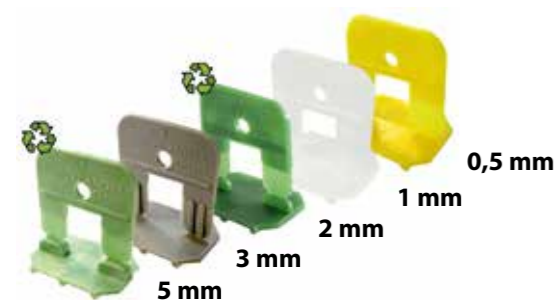

self-leveling spacers for tiles 3 to 15 mm thick

SAP		Presentation	Europallet	P/EU
100108031	wedge	100 ud/bag	700 bags/pallet	21.00 p/bag
100108032	wedge	300 ud/bag	240 bags/pallet	48.71 p/bag
100095383	wedge	500 ud/bag	140 bags/pallet	92.52 p/bag
100207811	0,5 mm spacer	100 ud/bag	600 bags/pallet	15.54 p/bag
100207797	0,5 mm spacer	300 ud/bag	200 bags/pallet	42.46 p/bag
100207740	0,5 mm spacer	500 ud/bag	120 bags/pallet	68.83 p/bag
100108026	1 mm spacer	100 ud/bag	600 bags/pallet	14.68 p/bag
100108027	1 mm spacer	300 ud/bag	200 bags/pallet	41.81 p/bag
100108028	1 mm spacer	500 ud/bag	120 bags/pallet	65.89 p/bag
100108029	2 mm spacer	100 ud/bag	600 bags/pallet	14.68 p/bag
100108030	2 mm spacer	300 ud/bag	200 bags/pallet	41.81 p/bag
100095382	2 mm spacer	500 ud/bag	120 bags/pallet	65.89 p/bag
100109070	3 mm spacer	100 ud/bag	600 bags/pallet	14.68 p/bag
100109071	3 mm spacer	300 ud/bag	200 bags/pallet	40.03 p/bag
100109072	3 mm spacer	500 ud/bag	120 bags/pallet	65.89 p/bag
100275166	5 mm spacer	100 ud/bag	600 bags/pallet	15.70 p/bag
100275156	5 mm spacer	300 ud/bag	200 bags/pallet	42.88 p/bag
100275138	5 mm spacer	500 ud/bag	120 bags/pallet	70.43 p/bag

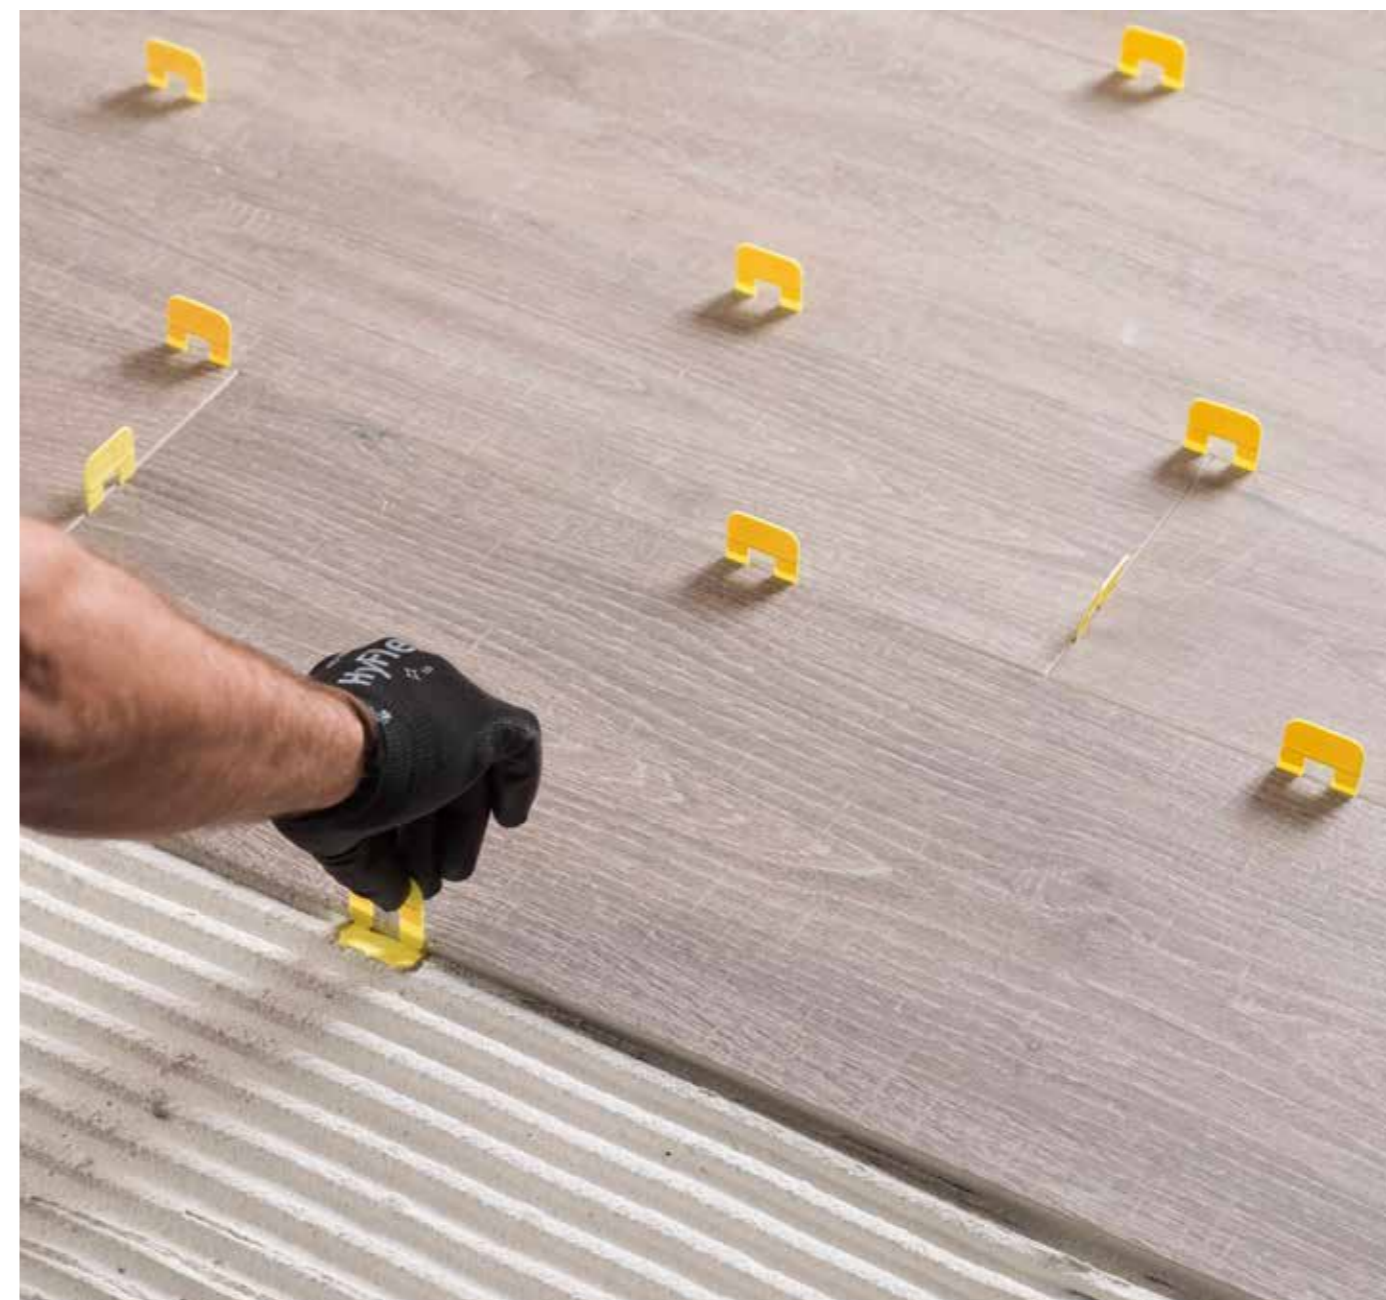

self-leveling spacers for tiles 16 to 22 mm thick

SAP		Presentation	P/EU
100225039	2 mm spacer	100 ud/bag	15.95 p/bag
100315637	2 mm spacer	100 ud/bag	p/bag
100315638	5 mm spacer	300 ud/bag	p/bag
100315639	5 mm spacer	500 ud/bag	p/bag

complements

SAP		Presentation	P/EU
100213808	0,5 mm spacer system kit	kit*	112.87 p/kit
100108034	1 mm spacer system kit	kit*	78.49 p/kit
100109073	2 mm spacer system kit	kit*	78.49 p/kit
100109074	3 mm spacer system kit	kit*	78.49 p/kit
100275157	5 mm spacer system kit	kit*	83.86 p/kit
100123264	supplementary lift piece	50 ud/bag	4.03 p/bag
100095386	adjustment tool	unit	49.55 p/u

*kit: 1 adjustment tool, 100 spacers and 100 wedges

GROUTING COVERAGE

a x b	c	colorstuk 0-4	colorstuk especial	colorstuk rapid	epotech aqua	epotech nature
cm	mm	gr/m ²	gr/m ²	gr/m ²	gr/m ²	gr/m ²
25 x 25	4	480	496	512	486	493
50 x 50	4	240	248	256	243	246
75 x 75	4	160	165	171	162	164
100 x 100	6	180	186	192	182	185
20 x 31,6	9	110	114	118	112	113
31,6 x 44,6	9	73	75	78	74	75
31,6 x 59,2	9	66	68	70	66	67
31,6 x 90	9	58	60	62	58	59
33,3 x 100	9,2	55	57	59	56	57
45 x 120	10,5	48	50	51	49	49
21,5 x 65,9	11	102	105	109	103	104
14,3 x 90	11	134	138	143	136	137
22 x 90	11	93	96	100	95	96
19,3 x 120	11	99	103	106	101	102
19,3 x 180	12	103	107	110	105	106
29,4 x 120	11	70	72	75	71	72
29,4 x 180	12	71	74	76	72	73
25 x 150	10,5	74	76	78	74	75
44,3 x 44,3	10	68	70	72	69	70
43,5 x 65,9	11	63	65	67	64	65
40 x 80	11	62	64	66	63	64
45 x 90	11	55	57	59	56	56
59,6 x 59,6	11	55	57	59	56	57
80 x 80	12	45	47	48	46	46
59,6 x 120	12	45	47	48	46	46
100 x 100	11	33	34	35	33	34
120 x 120	12	30	31	32	30	31
100 x 100	3,5	11	11	11	11	11
100 x 100	6	18	19	19	18	18
120 x 120	6	15	16	16	15	15
100 x 300	3,5	7	7	7	7	7
120 x 250	6	11	11	12	11	11

SELF-LEVELING SPACERS COVERAGE

a	b	a x b	c	Spacers / m ²	
				Aligned	Staggered 3/4
cm	cm	cm x cm	mm		
25	25	25 x 25	4	64	-
50	50	50 x 50	6	61	-
75	75	75 x 75	6	29	-
100	100	100 x 100	8	27	-
20	31,6	20 x 31,6	9	64	-
31,6	44,6	31,6 x 44,6	9	29	-
31,6	59,2	31,6 x 59,2	9	22	-
31,6	90	31,6 x 90	9	18	-
33,3	100	33,3 x 100	9,2	16	-
45	120	45 x 120	10,5	12	-
21,5	65,9	21,5 x 65,9	11	36	43
14,3	90	14,3 x 90	11	39	47
22	90	22 x 90	11	26	31
19,3	120	19,3 x 120	11	26	31
19,3	180	19,3 x 180	12	21	23
29,4	120	29,4 x 120	11	18	20
29,4	180	29,4 x 180	12	14	16
25	150	25 x 150	10,5	16	19
44,3	44,3	44,3 x 44,3	10	21	-
43,5	65,9	43,5 x 65,9	11	18	-
40	80	40 x 80	11	16	-
45	90	45 x 90	11	13	-
59,6	59,6	59,6 x 59,6	11	12	-
80	80	80 x 80	12	10	-
59,6	120	59,6 x 120	12	9	-
100	100	100 x 100	11	9	-
120	120	120 x 120	12	6	-
100	100	100 x 100	3,5	6	-
100	100	100 x 100	6	6	-
120	120	120 x 120	6	6	-
100	300	100 x 300	3,5	4	-
120	250	120 x 250	6	4	-



SUBSTRATE PREPARATION PRODUCTS

ELECTRIC RADIANT FLOOR HEATING

Electric Radiant Floor Heating, **163**

SELF-LEVELING MORTARS

level 3, **165**

PRIMERS


super-prim, **166** | universal bonding agent, **167**

CLEANING PRODUCTS


acid net 1L, **168** | porce-clean, **168** | basic-gel 1L, **168**
epotech cleaner, **169** | non slip tile, **169**



electric radiant floor heating



The electric radiant floor heating from butech, also known as **ERFH**, is a heating system with an electric element for radiant floors, specially designed to provide comfort in ceramic floors in bathrooms and, in general, all kinds of floors walked barefoot. The ERFH system consists of an electric element and a digital thermostat timer.

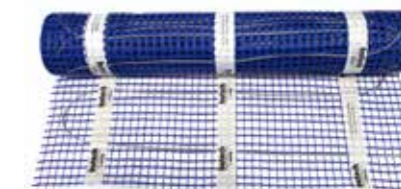

The electric element is a 1.8 mm diameter heating wire that transforms electric energy into heating. Never cut this kind of wire. Maximum power is 150 W/m².



touch control

User-friendly digital thermostat that regulates the turn on and off and heating power of the system.

Features:

- Easy, quick and economic installation. No maintenance costs.
- Avoids the installation of radiators on the walls.
- Ideal for homes not connected to the gas distribution network.
- Applicable in floors where a water pipe heating cannot be installed.
- More uniform heat distribution to all the surface of the room.
- More pleasant elevation of heat distribution.
- No air movement.

Power: 150 W/m²
 Voltage: 230 V – 50/60 Hz
 Maximum charge: 16 Amp / 230 V max
 Maximum temperature: + 40°C

Recommended uses:

- Radiant heating in home refurbishings.
- General heating of homes.
- Comfort and auxiliary heating in bathrooms and dressing rooms.
- Comfort and auxiliary heating in spas and premises with permanent dampness.
- Comfort and auxiliary heating in locker rooms, recreational and sports premises.
- Heating of indoor areas with high ceilings.
- Temporary heating of workplaces.
- Do not use in outdoor floors.

Guarantee:

- Thermostat guarantee: 3 years
- Electric Mat guarantee: Lifetime

Materials:

- Absorbent ceramics and porcelain tiles (water absorption < 0.5% as per EN-ISO 10545-3).
- Natural stone and marble not prone to staining.
- Wooden floors bonded to the substrate.
- Do not use under floating floors.
- Do not use under material sensible to heat.

Installation:

- Choose the radiant Mat that suits the surface to be heated.
- In case of surfaces bigger than 10 m², connect Mats in parallel in a connection box.
- Do not connect Mats with a total surface bigger than 20 m² to one thermostat.
- Never cut the heating wire.
- Do not install under static elements and less than 10 cm from the walls.
- Never drill a floor where a radiant heating has been installed.

electric radiant floor heating

SAP	Premium ERFH	Presentation	P/EU
100232008	1 m ² Mat	1 Mat/box	165.66 p/u
100232081	1.5 m ² Mat	1 Mat/box	190.85 p/u
100232053	2 m ² Mat	1 Mat/box	212.70 p/u
100232009	2.5 m ² Mat	1 Mat/box	243.43 p/u
100232090	3 m ² Mat	1 Mat/box	271.88 p/u
100232082	4 m ² Mat	1 Mat/box	351.69 p/u
100232016	5 m ² Mat	1 Mat/box	430.40 p/u
100232080	10 m ² Mat	1 Mat/box	739.54 p/u
100305735	10GM Thermostat	1 thermostat/box	362.48 p/u

Before using this product in any application not indicated in this catalogue, please perform a test or refer to the product's technical sheet.



level 3



level 3 is a fast setting fibre-reinforced self-levelling mortar, specially developed polymer modified cement based self-levelling compound designed for evening out floor irregularities and to provided a perfectly flat base ready to receive tiled finishes.

Can be used from 3 to 30 mm in thickness floor substrates. Can be applied by hand or pump. At 3 mm, from level 3 can be walked on after 4-5 hours and is ready to receive tiled finishes after 24 hours.



Certifications/Standards:

EN 13813 C25-F5-A2n-s1

Features:

- Fibre-reinforced
- High strength
- Perfectly flat finish
- Application thickness between 3 and 30 mm
- Can be walked on after 4-5 hours
- Ready to receive tiled finishes after 24 hours
- Mixing water: 4.25 – 4.50 l per 25 kg bag

Recommended uses:

- Interior areas only
- Large format floor tile coverings.
- Large format rectified floor tile coverings.
- Floor tile coverings with a 1 mm joint.
- Floor tiles over underfloor heating systems.
- In a wet duty environment it must be protected by a suitable waterproof membrane.

Substrates:

Previously applied **universal bonding agent:**

- Concrete
- Cement-based screeds
- Anhydrite/hemi-hydrate screeds
- Plywood overlay

Previously applied **super-prim:**

- Natural stone and terrazzo floorings
- Existing ceramic tiles

butech concept panel XPS

Materials:

- Ideal base beneath ceramic, porcelain, stone tiles and mosaics

Coverage:

- 2 kg per m² and thickness millimeter


level 3

SAP	Presentation	Europallet	P/UK
100160256 level 3	bag 25 kg	1000 kg/pallet	32.41 p/bag

Before using this product in any application not indicated in this catalogue, please perform a test or refer to the product's technical sheet.

super-prim

super-prim is a water-based acrylic resin primer with silica arids, used for preparing substrates prior to using adhesives, self-leveling mortars and mortar screeds. It reduces water absorption and improves the consistency of cement-based substrates. Professional use.



Features:

- Water-based, acrylic resin latex with silica arids.
- It enhances the adherence of cement mortars on glazed wall coverings.
- It improves the bonding material setting time.
- It reduces substrate water absorption.
- It increases cohesion of the substrate.
- Easy application with a paint roller or a wide paintbrush. Can be applied with airless spray.
- Indoor and outdoor use.
- Do not dilute with water or mix with any other liquids.

Recommended uses:

- Primer for self-leveling mortars on highly absorbent or existing ceramic tile coverings.
- Ceramic tiles on cement-based substrates with weak consistency or existing ceramic tile coverings.
- Ceramic floor coverings on anhydrite substrates or ceramic wall coverings on plaster or molding plaster.
- Mortar screeds on brick partition walls or concrete block walls.
- Mortar screeds on ceramic tile or natural stone floors.
- Do not use in substrates subject to dampness increases.

Substrates:

- Ceramic brick partition walls.
- Cement covered floors and walls.
- Concrete slabs and aerated concrete blocks.
- Anhydrite-covered floors and plastered walls.
- Indoor ceramic floor and wall tiles.
- Indoor wood boards.
- Indoor metal sheets.

Coverage:


Substrate	Coverage
Non absorbent	200 - 250 gr/m ²
Absorbent	250 -300 gr/m ²

super-prim				
SAP		Presentation	Europallet	P/UK
100123220	super-prim	can 10 kg	640 kg/pallet	10.56 p/kg

Before using this product in any application not indicated in this catalogue, please perform a test or refer to the product's technical sheet.

universal bonding agent

universal bonding agent, multipurpose primer, is a high quality water-based synthetic primer for preparing both absorbent and non-absorbent substrates in readiness for the installation of ceramic, porcelain, glass and natural stone tiles and mosaics.



universal bonding agent is suitable for use on a wide range of substrates such as plaster, plasterboard, cement-based tilebacker boards, sand:cement render, masonry work, plywood, concrete, sand:cement and calcium sulphate based screeds. It is also suitable for non-absorbent substrates such as glazed or unglazed ceramic tiles, porcelain tiles, natural stone and terrazzo, tilebacker boards, butech concept panel, vinyl tiles etc. For use in interior and exterior areas.

Features:

- Consolidates fine surface dust.
- Water-based synthetic resins primer.
- Once dry, it leaves a film over the substrate, which in plaster-based substrates prevents contact and chemical reaction with cement-based adhesives. It prevents ettringite buildup.
- It reduces substrate water absorption.
- It improves the bonding material setting time.
- It increases cohesion of the substrate.
- Easy application with a paint roller or a wide paintbrush.
- Indoor and outdoor use.

Recommended uses:

- Wall tiles on plaster or molding plaster substrates.
- Floor tiles on anhydrite substrates.
- Ceramic tiles on cement-based substrates with weak consistency.
- Reinforcement of self-leveling mortars.
- Pavimentos con calefacción radiante.

Substrates:

Walls

- Sand:cement renderings
- Concrete
- Lightweight block / brickwork, dense concrete blockwork
- Plasterboard, moisture resistant plasterboard, tilebacker boards
- Gypsum plaster
- Glazed bricks and tiles

Floors

- Concrete
- Sand:cement screeds
- Heated sand:cement screeds
- Anhydrite / hemi-hydrate screeds
- Plywood overlay
- Existing floor tiles
- Vinyl tiles

Coverage:

Substrate	Coverage
Anhydrite/plaster substrate	100 - 200 gr/m ²

universal bonding agent			
SAP		Presentation	P/UK
100160258	universal bonding agent	1L bottle	11.58 p/bottle

Before using this product in any application not indicated in this catalogue, please perform a test or refer to the product's technical sheet.

acid net 1L

acid net is an acid detergent for cleaning ceramic floor and wall tiles. It dissolves all kinds of cement debris without damaging coverings or cement based joints like colorstuk.

Recommended uses:

- Cleaning of remains of adhesives and cement-based grouting materials in floor and wall tiles
- Cleaning of efflorescences and salts remains.
- Cleaning of plaster remains and plaster-based remains.
- Cleaning of lime remains and film.
- Cleaning of glazed substrates prior to laying new tiles.

Coverage:

Dilution 1: 1 with clear water 90-100 gr / m²
 Dilution 1: 2 with clear water 45-50 gr / m²



acid net 1L				
SAP		Presentation	Box	P/EU
100120423	acid net	bottle 1L	12 bottles	12.04 p/u

porce-clean

Neutral detergent for cleaning ceramic and natural stone floor coverings. High degreasing power for a deep and perfect cleaning. Fast drying. Indoor and outdoor use.

Recommended uses:

- Regular cleaning of ceramic wall tiles.
- Cleaning of remains of wax, oil or grease from floor and wall tiles .

Coverage:

10 l of clean water 100-200 ml



porce-clean				
SAP		Presentation	Box	P/EU
100120431	porce-clean	bottle 1L	12 bottles	10.70 p/u

basic gel 1L

Concentrated alkaline detergent developed for cleaning ceramic tiles in general. terracotta and antiqued marble. It removes all kinds of oils, varnishes, paints, wax and home stains. Specially effective for etching former treatments.

Recommended uses:

- Intensive cleaning of ceramic wall tiles.
- Cleaning of remains of wax, oil or grease from floor and wall tiles .
- Cleaning of glazed substrates prior to laying new tiles.



basic gel 1L				
SAP		Presentation	Box	P/EU
100120425	basic gel 1L	bottle 1L	12 bottles	14.33 p/u

*Given the wide variety of ceramic materials, glass mosaics and natural stones, we recommend to check with your tile provider about chemical resistance of the tiles before applying any cleaning product.

Before using any cleaning product, please perform a test or refer to the product's technical sheet.

epotech cleaner

Water-based detergent for cleaning epoxy putties remains and stains. Specially recommended for cleaning remains of epotech aqua. Professional use.

Recommended uses:

- Cleaning of epoxy putties remains and films on ceramic tiles, glass mosaics and natural stones.

Coverage for 2 mm joint:

Tile	200 x 316 cm	20 m ² /package
Tile	200 x 446 cm	30 m ² /package
Tile	316 x 596 cm	33 m ² /package
Tile	316 x 900 cm	37 m ² /package



epotech cleaner				
SAP		Presentation	Box	P/EU
100120428	epotech cleaner	bottle 500 ml	20 bottles	22.46 p/u

non-slip tile

Non-slip treatment for glazed and unglazed ceramic tiles reducing the risk of slip and fall accidents. Indoor and outdoor use.

The non-slip treatment reacts with the ceramic tiles surface, generating thousands of microscopic bowls. These evenly distributed engravings increase the contact surface and, in the presence of water, produce a suction between the covering and the foot. This effect increases the coefficient of friction and reduces the risk of slip and fall accidents.

Recommended uses:

- Glazed and non-glazed ceramic floor tile coverings.
- Indoor and outdoor floor tile coverings.
- Built in shower trays.
- Do not apply on fibre shower trays and bathtubs.
- Do not apply on materials which are sensible to acid attack, like limestones or mortar substrates.

Coverage:

Ceramic tile 200 gr/m²



non-slip tile				
SAP		Presentation	Box	P/EU
100120430	non-slip tile	bottle 500 ml	20 bottles	37.39 p/u

*Given the wide variety of ceramic materials, glass mosaics and natural stones, we recommend to check with your tile provider about chemical resistance of the tiles before applying any cleaning product.

Before using any cleaning product, please perform a test or refer to the product's technical sheet.



SHOWER TRAYS AND WATERPROOFING

SHOWER DECK SYSTEM

shower deck system, **172**

CONCEPT XPS SHOWER TRAYS

Concept xps shower trays, **176** | 22 mm shower trays for squared outlets, **178**

22 mm shower trays for linear outlets, **179** | Squared grates, **181**

Linear grates, **182** | Bespoke standard shower trays, **185**

CONCEPT XPS PANELS

Concept xps panels, **186** | Fixing elements for concept xps panels, **187**

WATERPROOFING

imperband deck kit, **188** | imperbox, **190**

imperband, **191** | sylastic Premium, **194**

DRAINAGE

Terrace drain, **195** | pool-deck, **196**

DECOUPLING

butech anti-cracking mat, **198** | lamitech n, **199**

shower deck system

New shower tray concept with concealed drain for the most exclusive bathrooms. This innovative shower tray system lets us create a sense of continuity with the rest of the bathroom floor because the slopes are concealed under the floor. Drainage is achieved through the open joints and does not require the installation of an evacuation grid.

The **shower deck system** is a shower tray made up by a polyurethane base coated with thermoset polymers, especially designed to have ceramic plates installed. Polyurethane base coated with thermoset polymers. Specially recommended for bathroom renovations.

Features:

- Flat shower tray without slopes.
- Polyurethane base coated with thermoset polymers.
- Drain concealed from sight.
- Ultra-slim shower tray; only 30 mm in height.
- Easy to clean and high resistance to domestic-use detergents.
- Virtually no maintenance, especially compared with wooden floors.
- Thermal insulation.
- Easy installation and assembly.

Recommended use:

- Shower trays and cabins in designer bathrooms.
- Shower trays in public buildings.
- Applications where it is necessary to eliminate architectural barriers.
- Accessible bathrooms.

Materials:

- Anti-slip porcelain tile plates.
- STON-KER antislip
- PAR-KER antislip
- URBATEK antislip

Physical properties of the shower deck systems tray:


Color	Black
Weight	5 Kg/m ²
Compression resistance	2000 KpA
Capillarity	0
Limit application temperature.	-70/+130 °C
Supply thicknesses (mm)	30 mm
Tolerances	Length and width: ± 2 mm Thickness: +/- 2 mm Squaring: < 2 mm/m

Installation:

- Concrete floor slabs.
- Cement covered floors.
- Wood flooring.

Components:

- Shower deck tray
- Horizontal drain and trap. Output Ø 40mm and 0.7 l/s
- Drain and trap tightening wrench
- 5 linear meters lami-band 200 roll
- PVC leveling profiles of 14X14X2000 mm to reference the height and finish of the ceramics (2 pcs)
- Profiles for union of ceramic pieces of 35 x 14 x longest measurement of the tray, max. 2000 mm (2 pcs)
- P-404 tube
- Protection plate
- Manhole key
- Instructions
- Ceramic tiles not included

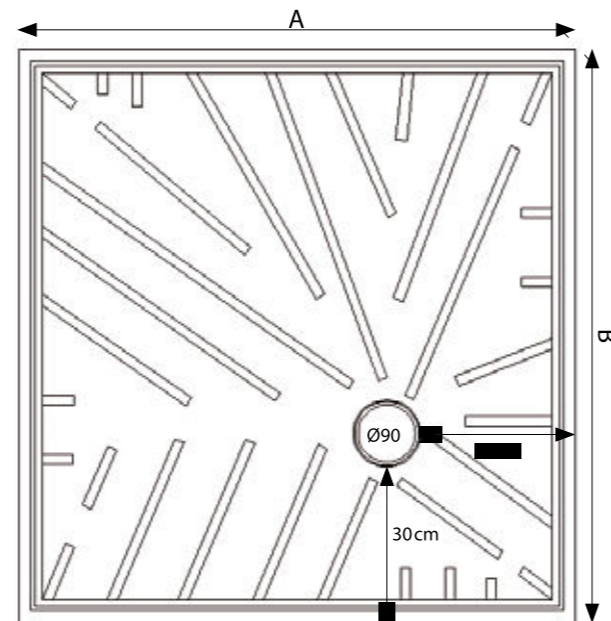

Standard references of shower deck UK

PAR-KER® 14,3 x 90 cm

MOY, CHETER, OXFORD, FOREST, HAMPTON, MISURI, MONTREAL

SAP	Description	Tray length (mm) (A)	Tray width (mm) (B)	Nº of tiles*	P/UK
100230003	769 x 938 x 30 mm	769	938	5	655.05 p/u
100229938	916 x 938 x 30 mm	916	938	6	717.47 p/u
100230010	1063 x 938 x 30 mm	1063	938	7	779.89 p/u
100229988	1210 x 938 x 30 mm	1210	938	8	842.31 p/u
100230020	1357 x 938 x 30 mm	1357	938	9	904.75 p/u
100230022	1504 x 938 x 30 mm	1504	938	10	967.17 p/u
100229978	1651 x 938 x x 30 mm	1651	938	11	1029.61 p/u

PAR-KER® 22 x 90 cm

CHESTER, SMART MINNESOTA, SMART TANZANIA, SMART VANCOUVER

SAP	Description	Tray length (mm) (A)	Tray width (mm) (B)	Nº of tiles*	P/UK
100229939	930 x 938 x 30 mm	930	938	4	723.42 p/u
100229994	1154 x 938 x 30 mm	1154	938	5	818.53 p/u
100230021	1378 x 938 x 30 mm	1378	938	6	913.67 p/u
100229993	1602 x 938 x x 30 mm	1602	938	7	1008.80 p/u

PAR-KER® 19,3 x 120 cm

ASCOT, OXFORD

SAP	Description	Tray length (mm) (A)	Tray width (mm) (B)	Nº of tiles*	P/UK
100229979	822 x 1238 x 30 mm	822	1238	4	789.20 p/u
100229986	1019 x 1238 x 30 mm	1019	1238	5	899.61 p/u
100230011	1216 x 1238 x 30 mm	1216	1238	6	1010.05 p/u
100230004	1413 x 1238 x 30 mm	1413	1238	7	1120.47 p/u
100229987	1610 x 1238 x 30 mm	1610	1238	8	1230.86 p/u

PAR-KER® 25 x 150 cm

MINNESOTA, TANZANIA, NEBRASKA, VANCOUVER

SAP	Description	Tray length (mm) (A)	Tray width (mm) (B)	Nº of tiles*	P/UK
100257830	796 x 1538 x 30 mm	796	1538	3	877.32 p/u
100257840	1050 x 1538 x 30 mm	1050	1538	4	1047.77 p/u
100257813	1304 x 1538 x 30 mm	1304	1538	5	1218.24 p/u
100257843	1558 x 1538 x 30 mm	1558	1538	6	1388.69 p/u
100257844	1812 x 1538 x 30 mm	1812	1538	7	1559.14 p/u

For special measures trays, use:
100209374 Shower deck UK TRAY SPECIAL MEASUREMENTS.

*Calculations for 4 mm joints



**SHOWER TRAYS AND
WATERPROOFING**

CONCEPT XPS SHOWER TRAYS

concept xps shower trays

It is a prefabricated system for creating built in shower trays. They include the slopes for the correct water drainage, as well as the drain and the waterproofing system. This system is supplied ready to use, which reduces working times while guarantees a perfect substrate for laying mosaic, natural stone or ceramics.

concept xps shower tray is light, resistant and safe, reason why it is specially recommended in bathroom refurbishing jobs. It includes imperband kit as a drain and waterproofing system, but it does not include the decorative grating, so you can choose among a wide range of sizes, shapes and finishes.

Features:

- Prefabricated shower tray made of extruded polystyrene covered with cement mortar.
 - It includes slopes for water drainage.
 - Double waterproofing: covering consisting of waterproof mortar and imperband sheet.
 - It includes imperband kit for waterproofing the shower tray and the adjustment piece.
 - Available in two options:
 - imperband standard kit: 40 mm high
 - imperband refurbishing kit: 30 mm high
 - Available for square as well as for linear drains.
-
- Compression resistance (10% crush risk): DIN 3421 0.3 N / mm²
 - Initial thermal conductivity: DIN 2612 0.0336 W/m²K
 - Flammability: DIN 4102 B1

Recommended uses:

- Specially designed for waterproofing built in showers.

Materials:

- Absorbent and non-absorbent ceramic tiles. Porcelain tiles with a water absorption < 0.5% as per EN-ISO 10545-3.
- Glass mosaic.
- Natural stone and marble not prone to staining.

Substrates:

- Concrete floor slabs.
- Cement covered floors.

concept shower tray selection guide

1. Depending on the drain outlet, select the type of concept xps shower tray to be used:

- Vertical outlet: Standard tray
- Horizontal outlet: Select depending on the shower tray height.

2. Depending on the shower tray height, select the type of concept xps tray to be used:

- 75-100 mm height Refurbishing shower tray
- > 100 mm height Standard shower tray

3. Select the type of decorative grating:

- Square grating: Shower tray for square grating
- Linear grating: Shower tray for linear grating

4. Select the grating position:

- ESQ: Grating on a corner.
- CENT: Grating in a central position.
- LAT: Grating in a lateral position.

5. Select the shower tray shape:

- Square shower tray.
- Rectangular shower tray.

6. Choose the shower tray among the available sizes.

In the case that the available sizes do not fit in the project needs, there is the possibility of making custom shower trays.




22 mm shower trays for squared outlets


These shower trays feature a 22 mm thickness.
Does not include the drain and the grate.

concept shower trays


COR	Squared shower tray corner drain position		
SAP		Presentation	P/UK
100119515	900 x 900 x 22 mm	Shower tray	409.76 p/u
100119443	1000 x 1000 x 22 mm	Shower tray	425.41 p/u
100119462	1200 x 1200 x 22 mm	Shower tray	487.81 p/u
100119488	1500 x 1500 x 22 mm	Shower tray	665.20 p/u




CENT	Squared shower tray center drain position		
SAP		Presentation	P/UK
100119514	900 x 900 x 22 mm	Shower tray	409.76 p/u
100119442	1000 x 1000 x 22 mm	Shower tray	425.41 p/u
100119461	1200 x 1200 x 22 mm	Shower tray	492.60 p/u
100119487	1500 x 1500 x 22 mm	Shower tray	671.73 p/u



LAT	Rectangular shower tray off-center drain position		
SAP		Presentation	P/UK
100119468	1200 x 900 x 22 mm	Shower tray	446.33 p/u
100119456	1200 x 1000 x 22 mm	Shower tray	455.28 p/u
100119478	1400 x 900 x 22 mm	Shower tray	489.60 p/u
100119494	1500 x 900 x 22 mm	Shower tray	507.53 p/u
100119500	1600 x 900 x 22 mm	Shower tray	529.91 p/u
100119529	1800 x 900 x 22 mm	Shower tray	582.16 p/u



CENT	Rectangular shower tray center drain position		
SAP		Presentation	P/UK
100119448	1000 x 800 x 22 mm	Shower tray	403.03 p/u
100119467	1200 x 900 x 22 mm	Shower tray	403.03 p/u
100119477	1400 x 900 x 22 mm	Shower tray	446.33 p/u
100119499	1600 x 900 x 22 mm	Shower tray	535.90 p/u
100119507	1800 x 900 x 22 mm	Shower tray	570.22 p/u




22 mm shower trays for linear outlets


These shower trays feature a 22 mm thickness.
Does not include the grate.

concept shower trays


LINEAR LAT Q	Squared linear shower tray standard drain		
SAP		Presentation	P/UK
100119517	900 x 900 x 22 mm	Shower tray	501.15 p/u
100119445	1000 x 1000 x 22 mm	Shower tray	519.26 p/u
100119464	1200 x 1200 x 22 mm	Shower tray	574.71 p/u
100119490	1500 x 1500 x 22 mm	Shower tray	734.12 p/u




LINEAR CENT Q	Squared linear shower tray center drain position		
SAP		Presentation	P/UK
100119516	900 x 900 x 22 mm	Shower tray	501.15 p/u
100119444	1000 x 1000 x 22 mm	Shower tray	519.26 p/u
100119463	1200 x 1200 x 22 mm	Shower tray	574.71 p/u
100119489	1500 x 1500 x 22 mm	Shower tray	744.86 p/u



LINEAR LAT R	Rectangular linear shower tray off-center drain		
SAP		Presentation	P/UK
100119470	1200 x 900 x 22 mm	Shower tray	525.81 p/u
100119458	1200 x 1000 x 22 mm	Shower tray	532.40 p/u
100119480	1400 x 900 x 22 mm	Shower tray	565.01 p/u
100119496	1500 x 900 x 22 mm	Shower tray	577.25 p/u
100119502	1600 x 900 x 22 mm	Shower tray	555.47 p/u
100141872	1800 x 900 x 22 mm	Shower tray	446.82 p/u



LINEAR CENT R	Rectangular linear shower tray center drain position		
SAP		Presentation	P/UK
100119449	1000 x 800 x 22 mm	Shower tray	490.92 p/u
100119469	1200 x 900 x 22 mm	Shower tray	525.81 p/u
100119457	1200 x 1000 x 22 mm	Shower tray	532.40 p/u
100119479	1400 x 900 x 22 mm	Shower tray	522.28 p/u
100119495	1500 x 900 x 22 mm	Shower tray	577.25 p/u
100119501	1600 x 900 x 22 mm	Shower tray	600.36 p/u
100119508	1800 x 900 x 22 mm	Shower tray	639.59 p/u



All the standard concept shower trays have available a 55 mm thickness special piece to increase the height of the shower tray and cover sewer and drain. Check conditions with your sales representative from PORCELANOSA GRUPO.



SQUARED GRATES

Square grating

SAP

100119600 Horizontal outlet
100119601 Vertical outlet

P/UK

122.75 p/u
108.42 p/u



horizontal drain

vertical drain



Vertical drain includes standard squared grate.
Horizontal drain includes standard squared grate.

Pipe converter

SAP

100119594 Pipe converter for vertical outlet

P/UK

12.27 p/u

Vertical drain includes standard squared grate. Pipe converter not included.
Horizontal drain includes standard squared grate and pipe converter.



pipe converter

Horizontal drain

SAP

100119602 Horizontal outlet

P/UK

181.82 p/u

The reference Horizontal drain with pipe converter does not include any steel grate.
Information referring to linear gratings is on page 176 - 177.



horizontal drain with pipe converter

Waterproofing kit*

SAP

100128396 Waterproofing kit*

P/UK

146.49 p/u

*The mounting kit includes: 1 p-404 tube + imperband n 5 m roll + 2 corners + 10 ml of waterproof band.



Linear grates

Steel grate drain

SAP		Presentation	P/UK
100119599	700 mm	1ud/box	145.70 p/u



Tileable steel grate

SAP		Presentation	P/UK
100119598	700 mm	1ud/box	325.85 p/u




Linear standard polished drain

SAP		Presentation	P/UK
100243736	700 mm	1ud/box	560.75 p/u



Linear standard black drain

SAP		Presentation	P/UK
100254852	700 mm	1ud/box	230.67 p/u

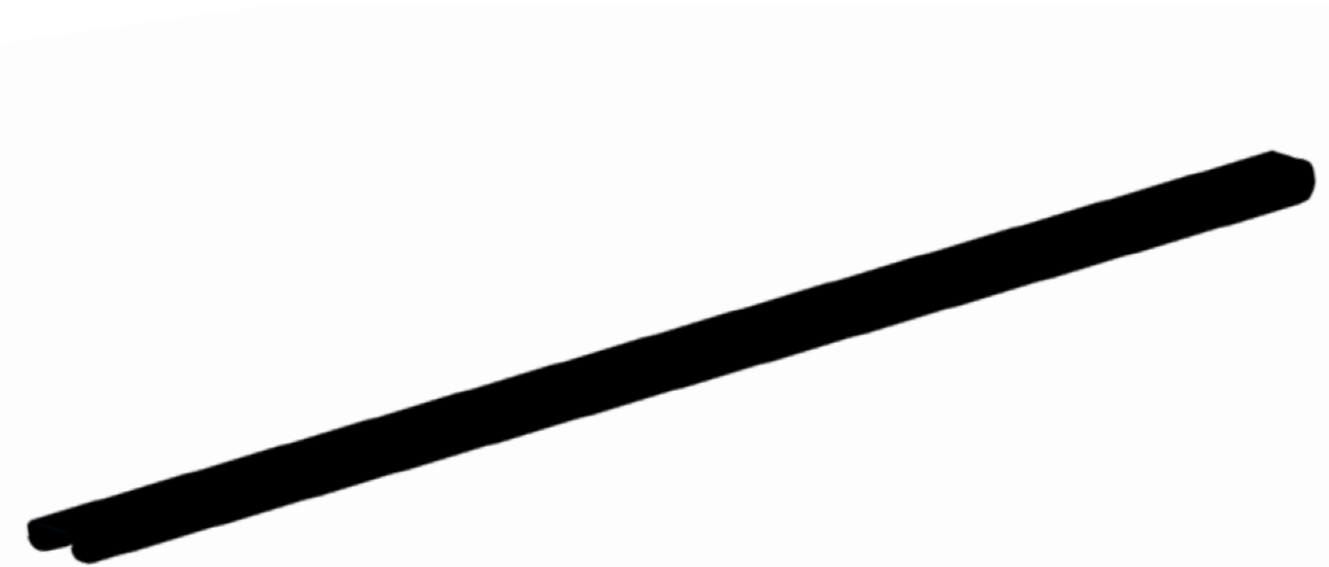

UK linear drain frame

SAP		Presentation	P/UK
100162310	700 mm	1ud/box	68.26 p/u





Bespoke shower trays


If you need a shower tray with certain dimensions or shape that cannot be found in our standard shower trays range, butech can make the shower tray with the shape and dimensions you need.

Just send us a drawing with the dimensions and shape you want for your shower tray and we will give you a price and a delivery date. If you agree, we will make your custom shower tray.

For making a square or rectangular shower tray, we need the following information:

- Shower tray dimensions
 - Long side xP
 - Wide side yP
 - Thickness choose among 30/40 mm
- Grating type
 - Square grating
 - Linear grating choose among 59.6/80/120 mm
- Drain position
 - Long side xS
 - Wide side yS

All dimensions must be entered in millimeters.

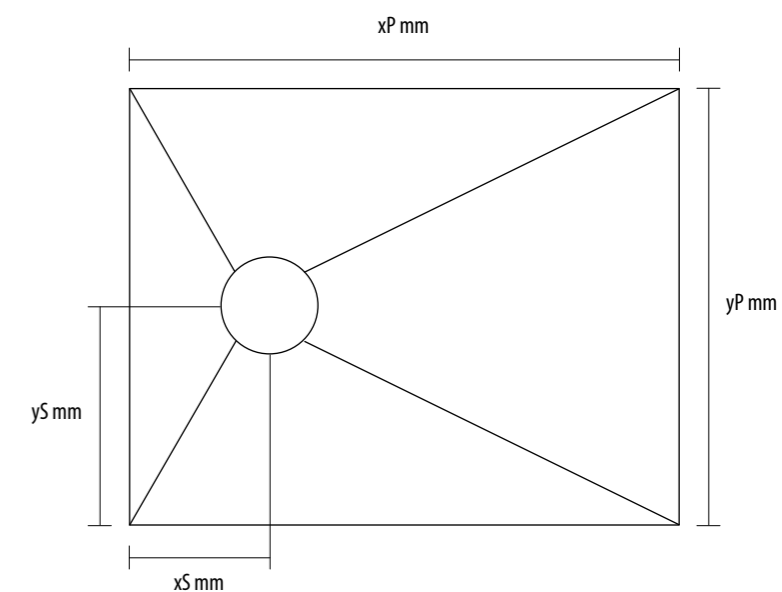



All custom drains include the imperband kit corresponding to the thickness of the chosen board.

Decorative grating is not included. Refer to page 181 - 183.

All the custom concept xps shower trays have available a 50 mm thickness special piece to increase the height of the shower tray and cover sewer and drain. Check conditions with your sales representative from PORCELANOSA GRUPO.

In case you need a shower tray with a non orthogonal shape, check with butech sales department.

Panel concept xps

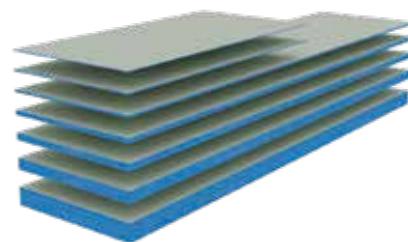

concept xps panels are extruded polystyrene panels ready for laying wall tiles, mosaics or natural stone with cement-based adhesives. Polystyrene lightness and easy handling, as well as its mechanical resistance and damp resistance make of this panel the perfect substrate for all kinds of environments where damp is present.

This kind of panel is available in thicknesses ranging from 4 to 80 mm and also in special precut boards that allow for a fast installation of curved shapes.

Features:

- Extruded polystyrene boards covered on both sides with waterproof cement mortar.
- Non-absorbent material. Its structure prevents water buildup. Resistant to dampness.
- Excellent surface for laying rectified tiles.
- Low thermal conductivity coefficient.
- Good soundproofing against impact noise.
- Easy handling and transport.
- Quick and clean installation.
- Resistant to microorganism attack.
- Inert and non-hazardous material made with 50% to 70% recycled material.
- Fire resistant: B1 as per DIN 4102.

Substrates:

- Usual indoor substrates in the building industry.
- Uncovered brick partition walls.
- Concrete floor slabs.
- Existing wall and floor tiles.
- Self-supporting indoors. Only 50 and 80 mm boards.

Recommended uses:

- Preparation of substrates for ceramic tiles laying. Specially recommended in refurbishing jobs.
- Bathroom countertops and vanities in permanently wet areas.
- Bathroom partition walls and platforms.
- Bathtub skirts and shower cabins.
- Shelves and panels attached to partition walls.
- Health resorts, saunas and spa premises.
- Thermal insulation of electric radiant heating floors.

Materials:

- Absorbent and non-absorbent ceramic tiles. Porcelain tiles with a water absorption < 0.5% as per EN-ISO 10545-3.
- Glass mosaic.
- Natural stone and marble not prone to staining.

Fixing elements for concept xps panels

concept fastening

SAP		Presentation	P/UK
100067686	45 mm metal fastening	50 ud/bag	53.15 p/bag
100062773	130 mm plastic fastening	10 ud/bag	10.51 p/bag
100062774	130 mm plastic fastening	50 ud/bag	48.81 p/bag
100062775	80 mm plastic fastening	10 ud/bag	7.76 p/bag
100062776	80 mm plastic fastening	50 ud/bag	33.15 p/bag



Self-adhesive fiberglass mesh roll

SAP		Presentation	P/UK
100062825	self-adhesive fiberglass mesh	Roll 10 m	10.70 p/roll
100062826	self-adhesive fiberglass mesh	Roll 20 m	18.43 p/roll



Polyurethane putty

SAP		Presentation	P/UK
100292915	h-920	290 ml	12.46 p/u
100031189	super-one gris	25kg	29.52 p/kg



Technical features

PROPERTIES	STANDARD	VALUE
Compression resistance (10% strain)	DIN 53421	300 KN/m ²
Nominal density	EN 1602	35 Kg/m ³
Shear resistance	EN 12090	0,25 N/mm ²
Tensile strength	EN 1607	0,50 N/mm ²
Adherence of the protection		> 2,0 Kg/cm ²
Resistance to eccentric load		> 10,0 Kg/cm ²
Water absorption		< 1,0 Kg/m ²
Thermal conductivity	EN 13164	0,034 W/m.k (30-60 mm) 0,036 W/m.k (> 60 mm)
Working temperature range		-50 °C / +75 °C
Tolerances		Length: +/- 5 mm Width: +/- 3 mm Thickness: +/- 2 mm Squareness: < 2 mm/m.l.
Fire resistance	DIN 4102-1	B s1-d0

concept xps panels

SAP		ud./pallet	P/UK
100103351	4 mm 1250 x 600	300	30.91 p/u
100103352	6 mm 1250 x 600	280	29.75 p/u
100103349	10 mm 2500 x 600	225	64.79 p/u
100103350	20 mm 2500 x 600	111	69.87 p/u
100103354	30 mm 2500 x 600	80	78.85 p/u
100103355	50 mm 2500 x 600	45	91.15 p/u
100103356	80 mm 2500 x 600	31	142.50 p/u

WATERPROOFING

imperband deck kit



Waterproofing system for ceramic parquet-covered shower trays; specially designed for PORCELANOSA Grupo's PAR-KER lines. In this system, the traditional metal grid is replaced with a ceramic piece so that the drain system is hidden from sight. Professional use.

PAR-KER is compatible with shower trays that have one, two, or four slopes, draining only through an open joint in the shower tray covering. A new invisible drain concept, for the best bathroom designs.

Characteristics:

- Drainage system for ceramic-covered and ceramic trim shower trays.
- Drainage through the open perimeter joint around the ceramic cover. Drainage joint width: 4 mm.
- Ultra-slim shower tray; only 22 mm in height, plus 60 mm from the drain.
- Compatible with all butech shower waterproofing systems: imperband, sylastic, and imperbo x
- Suitable for all PAR-KER models of less than 150 cm in length
- High resistance to domestic-use detergents.
- Safe and easy to maintain system.
- Quick and easy installation.

Materials:

- Anti-slip porcelain tile plates.
- STON-KER antislip
- PAR-KER antislip
- URBATEK antislip

Substrates:

- Cement covered floors

Componentes:

- Tray with the corresponding measure with 15 cm thermo-sealed imperband flange
- Horizontal drain and trap. Output Ø 40mm and 0.52l/s
- Manhole key
- 5 meter **imperband** roll

* Ceramic trim not included

Recommended use:

Ceramic showers with ceramic parquet covering. Especially recommended for the following models:

- PAR-KER 219 x 660 mm
- PAR-KER 210 x 659 mm
- PAR-KER 143 x 900 mm
- PAR-KER 220 x 900 mm
- PAR-KER 193 x 1200 mm
- PAR-KER 294 x 1200 mm

Installation:

- Connect the deck drain to the drain pipe.
- Connect the deck drain to the base kit imperband deck.
- Prepare the shower tray base with cement mortar and level with the base kit imperband deck, and let dry. As a general rule, we recommend a 2% slope
- Once the shower tray base is dry, waterproof the joint between the base kit imperband deck and the shower tray by using the imperband perimeter band. Bond with a C2 S1 adhesive as per EN 12004, such as one-flex premium.
- Waterproof both the shower tray and the shower walls with the chosen system. Although butech offers several systems that are compatible with the imperband deck kit, we recommend the imperband waterproof sheet; follow the instructions for use strictly.
- Install the shower tray floor using the thin layer, double bonding technique. Use an adhesive that is at least a C2 S1 as per EN 12004, suitable for the chosen ceramic type.
- Install the ceramic trim.
- Fill the tile joints of the shower tray covering with a moisture-resistant material; as a general rule, we recommend RG materials as per EN 13888, such as epotech nature.
- Seal the shower tray perimeter joints and wall intersections using an elastic sealant such as s-107 n


deck imperband kit

SAP		Presentation	P/UK
100215018	Kit 210 x 659 mm	1ud/box	376.95 p/u
100215031	Kit 220 x 900 mm	1ud/box	460.02 p/u
100231470	Beskope		

Before using this product in any application not indicated in this catalogue, please perform a test or refer to the product's technical sheet.



imperbox



imperbox is paste, ready-to-use waterproofing system specially recommended for waterproofing plasterboard indoors. Compatible with type C2 cement-based adhesive as per EN 12004. Indoor use.

Paste with water-dispersed acrylic polymers that provide it with excellent bonding and deformability properties, which means it can be used over the most common types of substrates used in construction. Special pieces and bands available for waterproofing joints and other critical spots.



Features:

- Water-based paste.
- Indoor waterproofer.
- Excellent adherence. Flexible.
- Good chemical resistance.
- Quick and easy application.

Materials:

- Absorbent and non-absorbent ceramic tiles. Porcelain tiles with a water absorption < 0.5% as per EN-ISO 10545-3.
- Glass mosaic.
- Natural stone and marble.

Substrates:

- Cement covered floors and walls .
- Anhydrite or plaster covered floors and walls .
- Concrete slabs.
- Plasterboards.
- Plywood boards.

Coverage:

Bond coat	
• One-layer application	1.8 kg / m ²
Waterproofing	
• Two-layer application	3.6 kg / m ²
Mean thickness per imperbox layer: 1.5 mm	

Recommended use:

- Private bathrooms. Built in showers.
- Public toilets and showers.
- Spas and premises in permanently damp environments.
- Balconies, covered terraces, cornices and gutters.
- Adhesion promoter on old vinyl and polyurethane adhesives.
- Do not use in outdoors surfaces greater than 10 m².

Angles and waterproof bands:

Special pieces made of waterproof thermoplastic rubber, mounted on polyester sheets which allow laying with type C2 cement-based adhesives as per EN 12004. Specially designed for waterproofing critical spots.

- 1. Inner angle:** Piece for sealing inner corners.
- 2. Outer angle:** Piece for sealing outer corners.
- 3. Waterproof band:** 8 cm wide waterproofing band for sealing edges, level changes and movement joints.




imperbox

SAP		Presentation	P/UK
100006223	imperbox manhattan	10 Kg can 450 Kg/pallet	8.45 p/kg
100006210	outer angle	unit	8.89 p/u
100006211	inner angle	unit	8.89 p/u
100081532	5 ml waterproof band	Roll 5 m	5.02 p/m
100081531	10 ml waterproof band	Roll 10 m	4.33 p/m
100006221	50 ml waterproof band	Roll 50 m	4.58 p/m

Before using this product in any application not indicated in this catalogue, please perform a test or refer to the product's technical sheet.

imperband



imperband is a waterproof sheet, specially designed for indoor waterproofing of ceramic wall and floor coverings.

It is a 0,5mm thick polymer membrane with a double thermoplastic polyolefin sheet and covered on both sides by non woven polyester fibers that allow it to be bonded to surfaces using cement-based adhesives. Ideal for use in new construction and refurbishment of showers and baths, and any indoor environment permanently affected by damp.

Certifications/Standards:

Avis technique: CSTB 13/16-1319

Features:

- Double thermoplastic polyolefin membrane covered on both sides by non woven polyester fibers.
- Maximum waterproofing with minimal thickness (0.5 mm).
- Direct installation of the tile on the sheet.
- Good chemical resistance.
- Quick and easy application.

Installation:

- **imperband** sheet is compatible with type C2 cement-based adhesive as per EN 12004.
- In case of surfaces bigger than the length of the sheet, overlap two 10 cm sheets and bond with C2 adhesive.
- In waterproofing of floors, leave an excess of sheet of at least 10 cm in all the spots where floor meets the wall.
- Be extremely cautious when connecting the sheet to the drainage systems.
- Once the **imperband** sheet has been installed, cover with the chosen floor covering. Never leave exposed to direct sunlight.

Recommended use:

- Private bathrooms. Built in showers.
- Public toilets and showers.
- Spas and premises in permanently damp environments.
- Balconies and terraces smaller than 10 m².
- Do not use in outdoors surfaces greater than 10 m².

Materials:

- Absorbent and non-absorbent ceramic tiles. Porcelain tiles with a water absorption < 0.5% as per EN-ISO 10545-3.
- Glass mosaic.
- Natural stone and marble.

Substrates:

- Cement covered floors and walls .
- Concrete slabs.
- Plasterboards.
- On anhydrite or plaster substrates apply **uniprim**, previously to the cement based adhesive

imperband


SAP		Presentation	P/UK
100276193	imperband	roll 30 m ² 720 m ² /pallet	15.06 p/m ²
100276212	imperband	roll 5 m ² 480 m ² /pallet	15.26 p/m ²

Before using this product in any application not indicated in this catalogue, please perform a test or refer to the product's technical sheet.



SHOWER TRAYS AND
WATERPROOFING

sylastic Premium



sylastic Premium is a single-component cementitious waterproofing material with excellent adhesion and deformability, both under positive and negative pressure. Compatible with type C2 cementitious adhesives according to EN 12004, it can be used to waterproof substrates prior to installing tiles. Indoor and outdoor use.

It avoids the need for screeds between the waterproofing and the tile, which reduces the thickness of the system. Application is done in two successive coats with a total thickness of at least 2 mm. Special pieces and bands are available for waterproofing joints and other critical points.



Features:

- Single-component waterproofing mortar
- Waterproofing for both positive and negative hydrostatic pressure
- Waterproofing of interiors and exteriors
- Maximum waterproofing with the minimum thickness (2 mm)
- Suitable for direct installation of tiles with cementitious adhesive
- Excellent adherence and maximum deformability
- Permeable to water vapor, prevents moisture condensation
- Suitable for direct contact with water
- Mixing water: 3.6 liters per 15 kg bag

Materials:

- Absorbent and non-absorbent tiles. Porcelain stoneware (water absorption <0.5% according to EN-ISO 10545-3)
- Glass mosaics
- Natural stones and marbles

Coverage:

- Waterproofing:
 - First layer: > 2 Kg / m²
 - Second layer: > 1 Kg / m²
 - Total waterproofing: > 3 Kg / m²
- Sylastic Premium total minimum thickness: 2mm
- Coverage per millimetre of thickness of sylastic Premium: 1,5 Kg/m²

Recommended use:

- Shower trays and cabins, bathrooms, spas and facilities in environments with permanent humidity
- Exterior terraces and balconies
- Pools and facilities in direct contact with water
- Basements, elevator shafts or tunnels even below the water table
- Cisterns and tanks in direct contact with water
- Repair of cracked screeds and plasters

Substrates:

- Cement mortar floors and plasters
- Concrete sheets
- Existing wall and floor tiles
- Plasterboard sheets.

Before applying sylastic Premium, moisten the support with water.

On substrates which are cracked or potentially subject to slight movements, reinforce the second layer of sylastic Premium with a fiberglass mesh.

Do not apply on plaster supports.

sylastic Premium

SAP		Presentation	P/EU
100316193	sylastic Premium	15 Kg bag	70.80 p/bag
100288372	50 m fiberglass mesh	50 m ² roll	2.80 p/m ²
100006210	outer angle	unit	8.89 p/u
100006211	inner angle	unit	8.89 p/u
100081532	5 ml waterproof band	5 m roll	5.02 p/m
100081531	10 ml waterproof band	10 m roll	4.33 p/m
100006221	50 ml waterproof band	50 m roll	4.58 p/m

terrace drain



The **floor drain** from **butech** is a drain for terraces and outdoor floors. It features a wide dish around the grating, which ease the connection to waterproofing sheets. Available with horizontal and vertical outlet, it helps to solve easily and effectively outdoor waterproofing and drainage.

The 10 cm connecting piece between the grating and the drain can be cut, so that it can be installed with glass mosaics up to natural stones. Includes steel grating.

Recommended use:

- Drain designed for connecting with waterproofing sheet.
- Specially designed for **lamitech n** waterproofing outdoor terraces and floors.
- Vertical outlet.

Terrace drain complements

Terrace drain connection:

Clamp for fixing **lamitech n** waterproofing sheet to drain. Includes stainless steel clamp, rubber o-ring and 6 fixing screws.



Terrace drain features:


- 190 mm high drain.
- Discharge speed. 1.6 l/s.
- 75/110 mm vertical outlet.
- 36 cm diameter crown for **lamitech n** waterproofing sheet fixation.
- Includes u-bend.
- 143 x 143 mm steel grating.



Terrace drain

SAP		Presentation	P/UK
100005827	75/110 vertical drain	1 ud/box	76.24 p/u
100005829	floor drain connection	1 ud/box	69.30 p/u

pool-deck



Drainage system for pools and terraces covered with porcelain tiles. This new water collection channel system is prepared to receive PORCELANOSA Grupo tiles and allows water to drain through the open joints between them. Compatible with any exterior waterproofing system, pool-deck replaces the traditional metal or plastic grates, completely changing the finish and durability of any outdoor flooring.

Available for 19.3 and 25 cm wide tile pieces. Professional system.

Features:

- Drainage through the open perimeter joint around the tile pieces. Drain joint width: 7mm
- Compatible with all butech exterior waterproofing systems: sylastic and lamitech n.
- Compact; only 55 mm thick channel plus tile.
- Light system, only 9 kg / m²
- High compressive strength: 2000 kpa

Recommended use:

- Drainage of interior and exterior flooring.
- Private and public showers.
- Terraces and pools
- Especially recommended for the following formats:
 - PAR-KER 193 x 1200 mm
 - PAR-KER 193 x 1800 mm
 - PAR-KER 250 x 1500 mm

Materials:

- Non-slip porcelain tile pieces
- STON-KER antislip
- PAR-KER antislip
- URBATEK antislip

Supports:

- Cement mortar screeds

pool-deck complements

pool-deck channel: 95 cm long channel with internal V-slope, which includes heat-sealed IMPERBAND waterproofing sheet over the eaves of the channel.

pool-deck adjustment Channel: Adjustment piece of different length measurements with internal V-slope, which includes heat-sealed IMPERBAND waterproofing sheet over the eaves of the channel. To complete the measurement required by the installation, these pieces will be available in the following measures: 15, 25, 35, 45, 55, 65, 75 and 85 cm.

pool-deck drain: Drain piece with internal V-shaped slope, which includes IMPERBAND waterproofing sheet heat-sealed over the eaves of the channel and a special drain designed for this system that withstands high pressures and is resistant to products commonly used in swimming pools.

pool-deck corner: Corner piece with internal V-slope, including IMPERBAND waterproofing sheet heat-sealed over the eaves of the channel.

pool-deck corner drain: Corner drain piece with internal V-slope, which includes heat-sealed IMPERBAND waterproofing sheet over the eaves of the channel and a special drain designed for this system that withstands high pressures and is resistant to products commonly used for swimming pools.

pool-deck side: Channel closure / start terminal that includes heat-sealed Imperband waterproofing sheet over the eaves of the channel.



pool-deck 25 cm

SAP		P/UK
100284628	pool-deck channel 25x95	162.55 p/u
100284678	pool-deck adjustment channel 25x15	99.42 p/u
100284682	pool-deck adjustment channel 25x25	108.08 p/u
100284683	pool-deck adjustment channel 25x35	116.71 p/u
100284684	pool-deck adjustment channel 25x45	125.37 p/u
100284667	pool-deck adjustment channel 25x55	133.98 p/u
100284648	pool-deck adjustment channel 25x65	142.67 p/u
100284668	pool-deck adjustment channel 25x75	151.30 p/u
100284669	pool-deck adjustment channel 25x85	159.96 p/u
100284681	pool-deck drain 25x29,6	114.14 p/u
100284665	pool-deck corner 25x27,4	107.24 p/u
100284680	pool-deck corner drain 25x27,4	119.33 p/u
100284685	pool-deck side 25x6,5 male	107.24 p/u
100289060	pool-deck side 25x6,5 female	108.12 p/u

pool-deck 19.3 cm

SAP		P/UK
100284673	pool-deck channel 19,3x95	146.12 p/u
100284644	pool-deck adjustment channel 19,3x15	89.88 p/u
100284664	pool-deck adjustment channel 19,3x25	98.07 p/u
100284674	pool-deck adjustment channel 19,3x35	105.34 p/u
100284675	pool-deck adjustment channel 19,3x45	113.26 p/u
100284646	pool-deck adjustment channel 19,3x55	121.20 p/u
100284653	pool-deck adjustment channel 19,3x65	128.77 p/u
100284676	pool-deck adjustment channel 19,3x75	146.12 p/u
100284638	pool-deck adjustment channel 19,3x85	144.24 p/u
100284637	pool-deck drain 19,3x23,9	103.10 p/u
100284663	pool-deck corner 19,3x21,7	96.66 p/u
100284670	pool-deck corner drain 19,3x21,7	107.24 p/u
100284654	pool-deck side 19,3x6,5 male	96.66 p/u
100289037	pool-deck side 19,3x6,5 female	97.47 p/u

butech anti-cracking mat



Decoupling sheet for floors undergoing low and medium movements.

This membrane reduces the transfer of tensions and stresses between the substrate and the flooring, protects the flooring against the appearance of cracks caused by sideways movements between the slabs forming the substrate and allows porcelain or natural stone flooring to be laid on substrates with medium and low movements. Especially recommended on floors built with timber panels.



Features:

- Closed-cell elastomer sheet coated on both sides with non-woven fibers that allow cement-based adhesives to be anchored.
- It allows for direct laying of ceramic tiles with cement-based adhesive types C2 S1 according to EN 12004.

Color: White
 Roll dimensions: 15 m² 1500 x 100 cm
 Roll weight: 12.35 kg/roll
 Sheet thickness: 1.5 mm
 Sheet density: 525 gr/m²

Final use:

- Indoor and outdoor floor tile coverings
- Residential and public concurrence floor coverings with pedestrian traffic
- Floor coverings for commercial or industrial use with mechanical requirements, even with wheel circulation
- Floors with built-in heating
- Suitable for kitchens, bathrooms and water-bearing areas
- Suitable for floor renovations

We do not recommend the use of butech anti-cracking mat in:

- Indoor and outdoor walls
- Supports exposed to bending movements
- On structural joints or movement joints of the support

Materials:

- Stoneware and porcelain stoneware floors, even large formats.
- Natural stones and marbles, even large formats.

The use of butech anti-cracking mat is not recommended:

- Chemically resistant floor coverings
- Under parquet floors

butech anti-cracking mat


SAP	Presentación	P/UK
100227223	Roll 15 m ² 450 m ² / pallet	11.28 p/m ²

lamitech n



lamitech n is a multilayer polymer sheet, specially designed for outdoor floors decoupling. Protects tiles against substrate tensions, reducing the risk of breakage and piece lifting. Suitable for outdoor waterproofing.

Coextruded HDPE/EVAC membrane, with one side covered with polyester fibers and the other one with polyester entwined felt, that allows laying with cement-based adhesives. Absorbs tensions, reducing their transmission to the ceramic floor. Indoor and outdoor use.

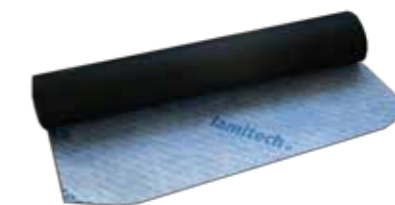

Features:

- Multilayer HDPE/EVAC polymer membrane covered with polyester fibers.
- Maximum outdoors waterproofing with minimal thickness (3,4 mm).
- It allows for direct laying of ceramic tiles with cement-based adhesive.
- Good chemical resistance.
- Improves impact noise reduction.
- Quick and easy application.

Installation:

- **lamitech n** sheet is compatible with type C2 cement-based adhesive as per EN 12004.
- Place sheets side by side, without overlappings. In case of using it as waterproofer, proceed to sealing sheet joints with **sylastic** waterproof mortar and **lamiband 200** waterproof band.
- In waterproofing of floors, lengthen the waterproofing with **lami-band 200** at least 10 cm in all the spots where floor meets the wall.
- In movement joints, use flexible tape waterproof band.
- Be extremely cautious when connecting the sheet to the drainage systems.
- Once **lamitech n** has been installed, lay the chosen floor with compatible adhesives. Never leave exposed to direct sunlight.

Recommended use:

- Decoupling of balconies and terraces.
- Waterproofing of outdoor floors.
- Laying of ceramics on wood substrates.
- Laying of floor tiles on cracked substrates. Terrace refurbishing.
- Laying of ceramics on substrates which are not set yet or present residual damp.

Materials:

- Absorbent and non-absorbent ceramic tiles. Porcelain tiles with a water absorption < 0.5% as per EN-ISO 10545-3.
- Glass mosaic.
- Natural stone and marble.

Substrates:

- Cement or anhydrite covered floors.
- Concrete slabs.
- Existing floor tiles.
- Plywood boards.

lamitech n

SAP	Presentación	P/UK
100286750	lamitech n 5 m roll 150 m ² /pallet	18.20 p/m ²
100288347	lami-band 200 mm 30 m roll	4.73 p/m
100006221	50 ml waterproof band 50 m roll	4.58 p/m
100316193	sylastic Premium 15 Kg bag	70.80 p/bag



SHOWER TRAYS AND
WATERPROOFING



SYSTEMS

THICKER 20_{MM}

Bottega caliza, **206** | Bottega acero, **206**
Durango bone, **208** | Durango acero, **208**
Nantes caliza, **210** | Nantes acero, **210**
Berna caliza, **212** | Berna acero, **212**
Harlem acero, **214** | Harlem caliza, **214**
Prada acero, **216** | Rodano acero, **216**
Rox coal, **218** | Rox grey, **218** | Rox beige, **218**
Riven white, **220** | Riven cream, **220** | Riven brown, **220**

PLOTS AND RAFx ACCESSORIES

Normal plot, **223** | Ultra plot, **223** | Plot n, **223** | Basic plot, **225**
End profile for RAFx, **225** | Vertical enclosure clip, **225**

FLOATING STAIRS

Floating stairs, **229**



THICKER 20_{MM}

SYSTEMS



Bottega caliza



bottega caliza antislip 100285287
59,6 x 59,6 x 2 cm **GB-365**

bottega caliza antislip 100306073
100 x 100 x 2 cm **GB-1385**

Recommended joint: **colorstuk rapid n perla** 100275760

Bottega acero



bottega acero antislip 100285276
59,6 x 59,6 x 2 cm **GB-365**

bottega acero antislip 100306036
100 x 100 x 2 cm **GB-1385**

Recommended joint: **colorstuk rapid n manhattan** 100236464

Adhesive: **super-flex S2 rapid grey** 100178221
super-flex S2 rapid white 100178231

Packaging: 2 units/box - 0,71 m²/box - 22,73 m²/pallet
1 pieza/box - 1 m²/CJ - 24 m²/pallet



Durango bone



Durango bone antislip 100308829
 59,6 x 59,6 x 2 cm **GB-365**
 Recommended joint: **colorstuk especial n nacaré** 100238235

Durango acero



Durango acero antislip 100308870
 59,6 x 59,6 x 2 cm **GB-365**
Durango acero antislip 100306090
 100 x 100 x 2 cm **GB-1385**

Recommended joint: **colorstuk especial n ash** 100204245

Adhesive: **super-flex S2 rapid grey** 100178221
super-flex S2 rapid white 100178231
 Packaging: 2 units/box - 0,71 m²/box - 22,73 m²/pallet
 1 pieza/box - 1 m²/CJ - 24 m²/pallet



Nantes caliza



Nantes caliza antislip
59,6 x 59,6 x 2 cm

100308828
GB-365

Recommended joint: **colorstuk especial n nacaré** 100238235

Nantes acero




Nantes acero antislip
59,6 x 59,6 x 2 cm

100308839
GB-365

Recommended joint: **colorstuk rapid n gris** 100236834

Adhesive: **super-flex S2 rapid grey** 100178221
super-flex S2 rapid white 100178231

Packaging: 2 units/box - 0,71 m²/box - 22,73 m²/pallet

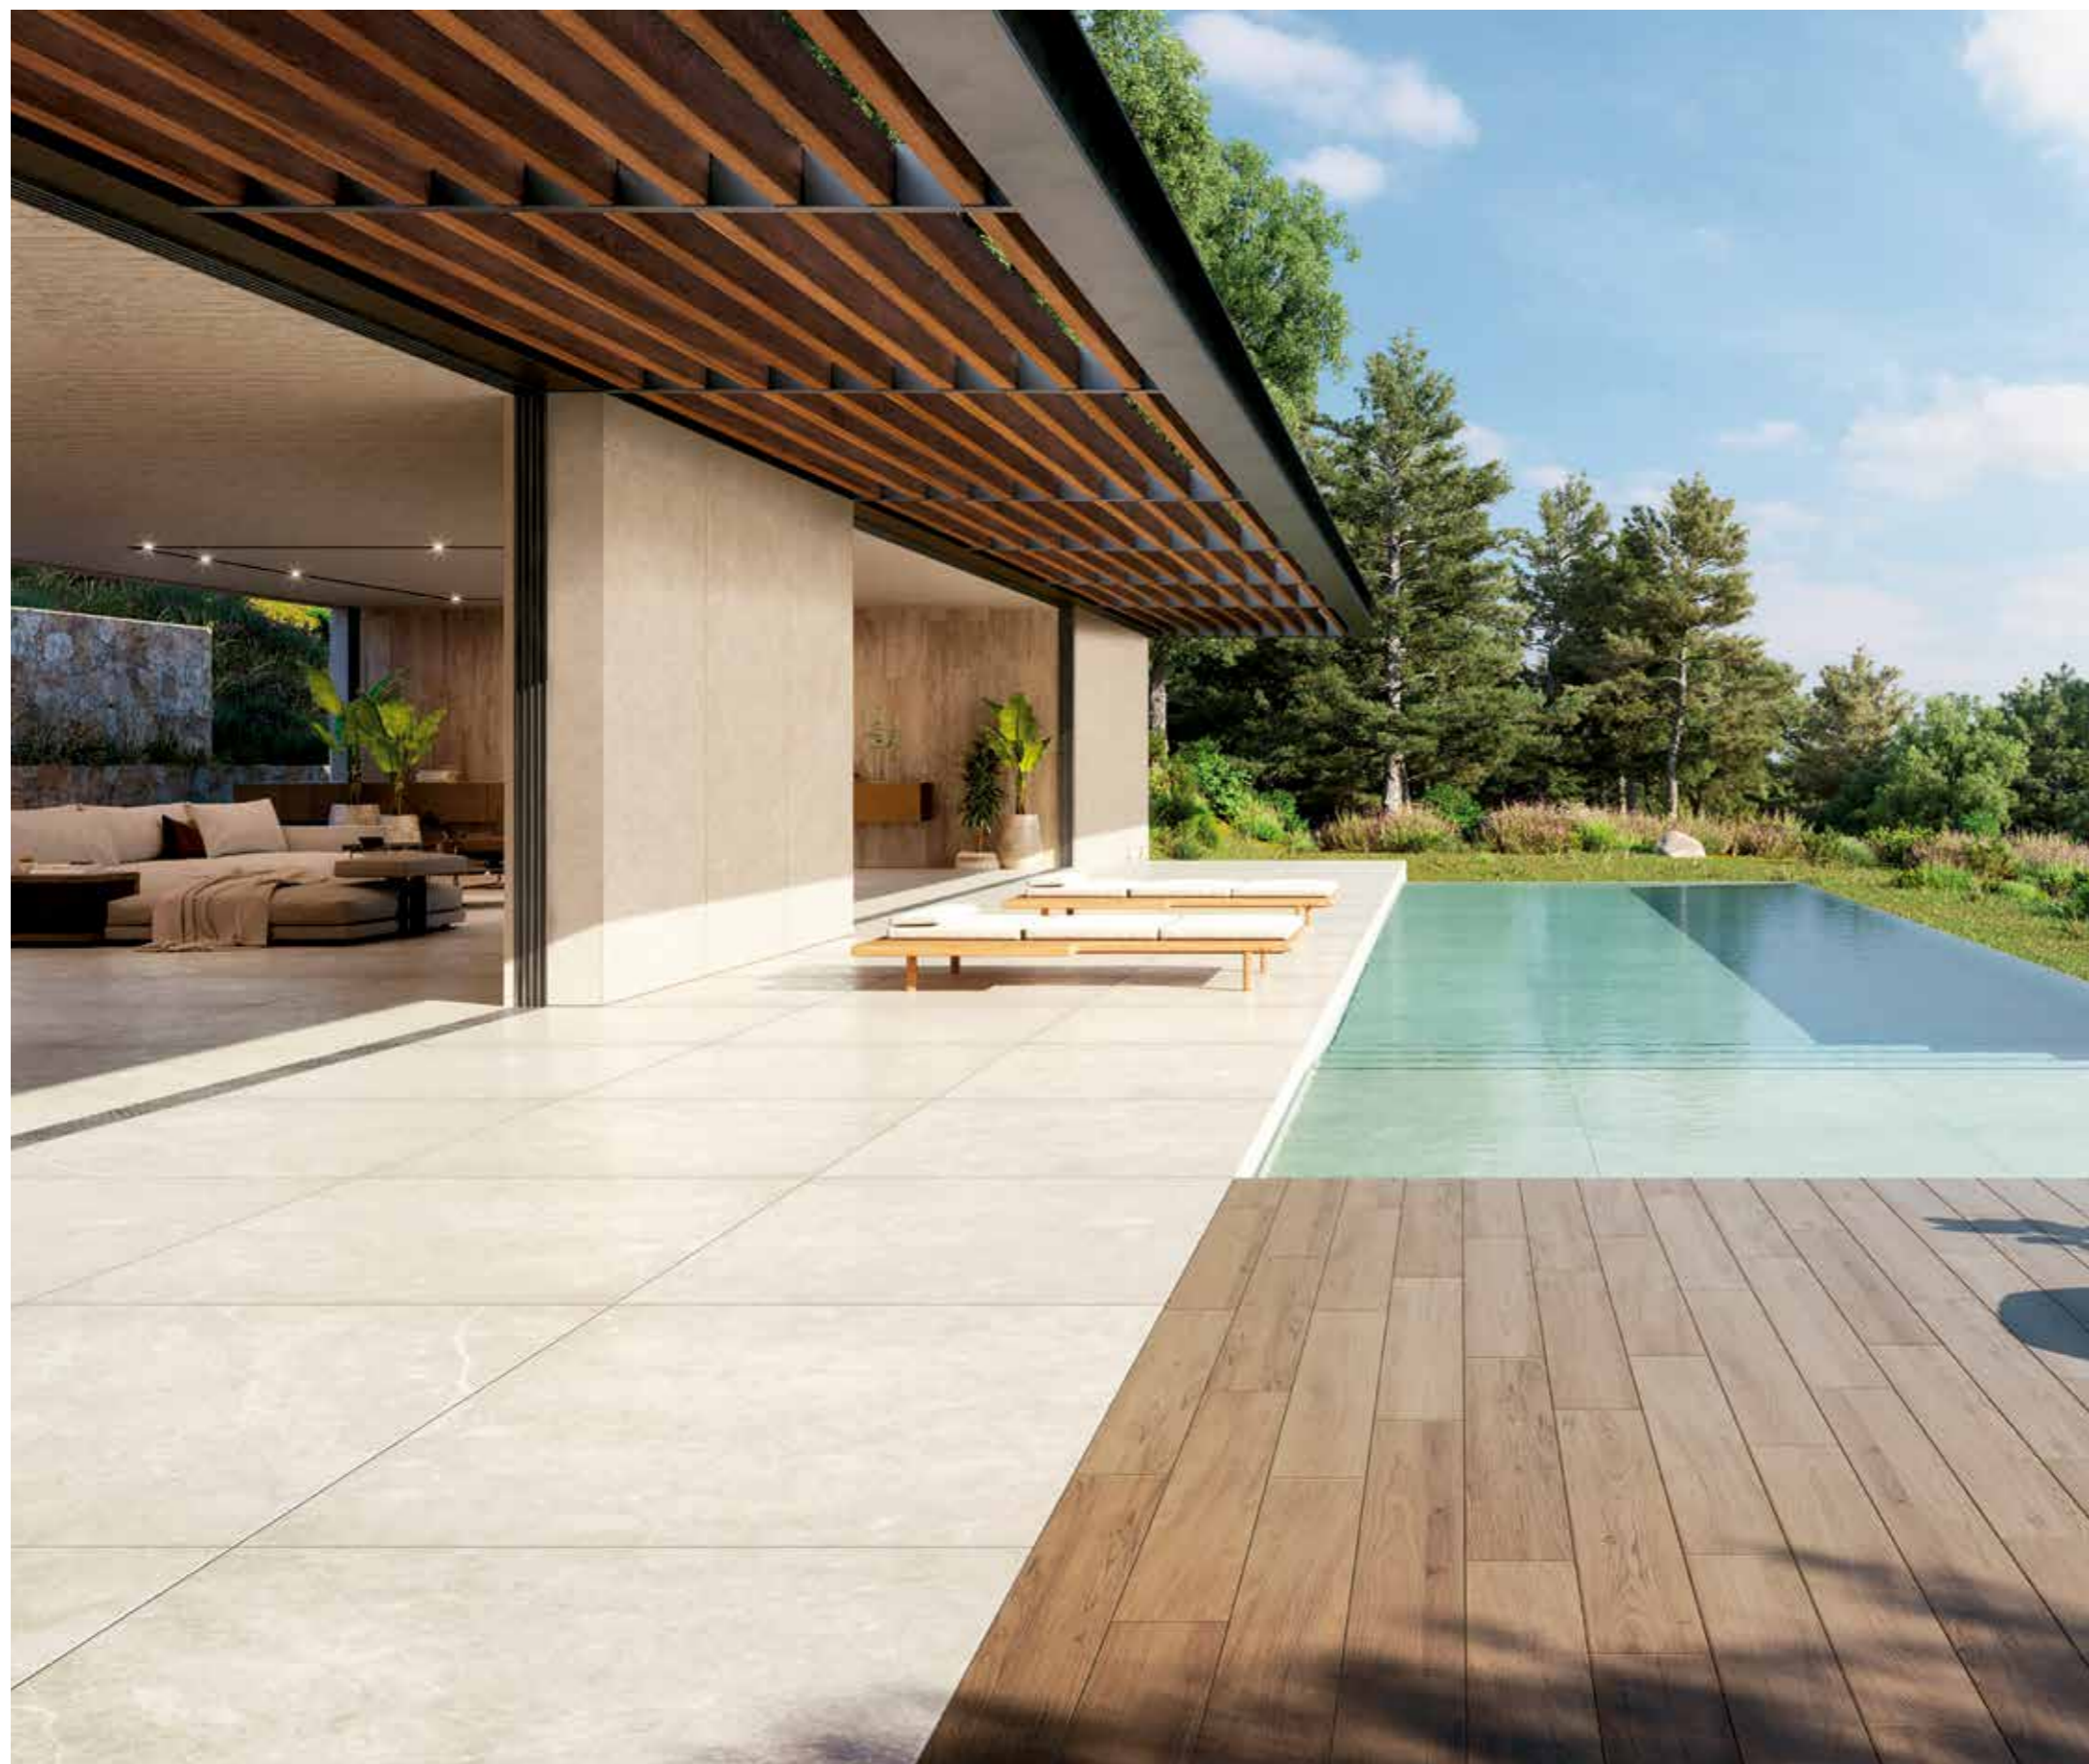

Berna caliza



Berna caliza antislip
59,6 x 59,6 x 2 cm

100308863
GB-365

Recommended joint: **colorstuk rapid n beige** 100236808

Berna acero



Berna acero antislip
59,6 x 59,6 x 2 cm

100308856
GB-365

Recommended joint: **colorstuk rapid n manhattan** 100236464

Adhesive: **super-flex S2 rapid grey** 100178221
super-flex S2 rapid white 100178231

Packaging: 2 units/box - 0,71 m²/box - 22,73 m²/pallet



Harlem acero



Harlem acero antislip
59,6 x 59,6 x 2 cm

100308854
GB-365

Recommended joint: **colorstuk rapid n manhattan** 100236464

Newport natural



Newport natural antislip
59,6 x 59,6 x 2 cm

100308855
GB-365

Recommended joint: **colorstuk rapid n gris** 100236834

Adhesive: **super-flex S2 rapid grey** 100178221
super-flex S2 rapid white 100178231

Packaging: 2 units/box - 0,71 m²/box - 22,73 m²/pallet



Prada acero



Prada acero antislip
59,6 x 59,6 x 2 cm

100308857
GB-365

Recommended joint:

colorstuk rapid n gris 100236834

Rodano acero



Rodano acero antislip
59,6 x 59,6 x 2 cm

100308864
GB-365

Recommended joint:

colorstuk rapid n manhattan 100236464

Adhesive: **super-flex S2 rapid grey** 100178221
super-flex S2 rapid white 100178231

Packaging: 2 units/box - 0,71 m²/box - 22,73 m²/pallet



Rox coal



Rox coal antislip rect. 100299917
60 x 60 x 2 cm **GB-1664**
Recommended joint: **colorstuk rapid n cemento** 100236449

Rox grey



Rox grey antislip rect. 100299981
60 x 60 x 2 cm **GB-1664**
Recommended joint: **colorstuk rapid n gris** 100275760
colorstuk rapid n manhattan 100236464

Rox beige



Rox beige antislip rect. 100299938
60 x 60 x 2 cm **GB-1664**
Recommended joint: **colorstuk rapid n beige** 100236808

Adhesive: **super-flex S2 rapid** 100178221
Packaging: 2 units/box - 0,732 m²/box - 21,96 m²/pallet



Riven white



Riven white antislip rect.
29,5 x 120 x 2 cm

100234121

GB-1294

Recommended joint:

colorstuk rapid n gris 100236834

Riven cream



Riven cream antislip rect.
29,5 x 120 x 2 cm

100234103

GB-1294

Recommended joint:

colorstuk rapid n beige 100236808
colorstuk rapid n gris 100236834

Riven brown



Riven brown antislip rect.
29,5 x 120 x 2 cm

100234064

GB-1294

Recommended joint:

colorstuk rapid n manhattan 100236464

Adhesive: **super-flex S2 rapid grey** 100178221 · **super-flex S2 rapid white** 100178231
Packaging: 2 units/box - 0,708 m²/box - 22,66 m²/pallet



plots adjustables (normal plot)

Type	Adjustable
Compression resistance	750 kg/unit. aprox.
Dimensions	Lower support base Ø 150 mm Upper head Ø 92 mm
Slopes	From flat to 2 %



plots adjustables (ultra plot)


Type	Adjustable
Compression resistance	1.000 kg/unit. aprox.
Dimensions	100/130: Lower support base Ø 150 mm Upper head Ø 92 mm Rest of the heights: Lower support base Ø 160 mm Upper head Ø 140 mm
Slopes	De 0 a 2 %



plots adjustables (plot n)

Type	Adjustable
Compression resistance	2.800 kg/unit. aprox.
Dimensions	Lower support base Ø 205 mm Upper head Ø 150 mm
Heights	Minimum 30 mm Maximum 670 mm
Slopes	From flat to 3 %



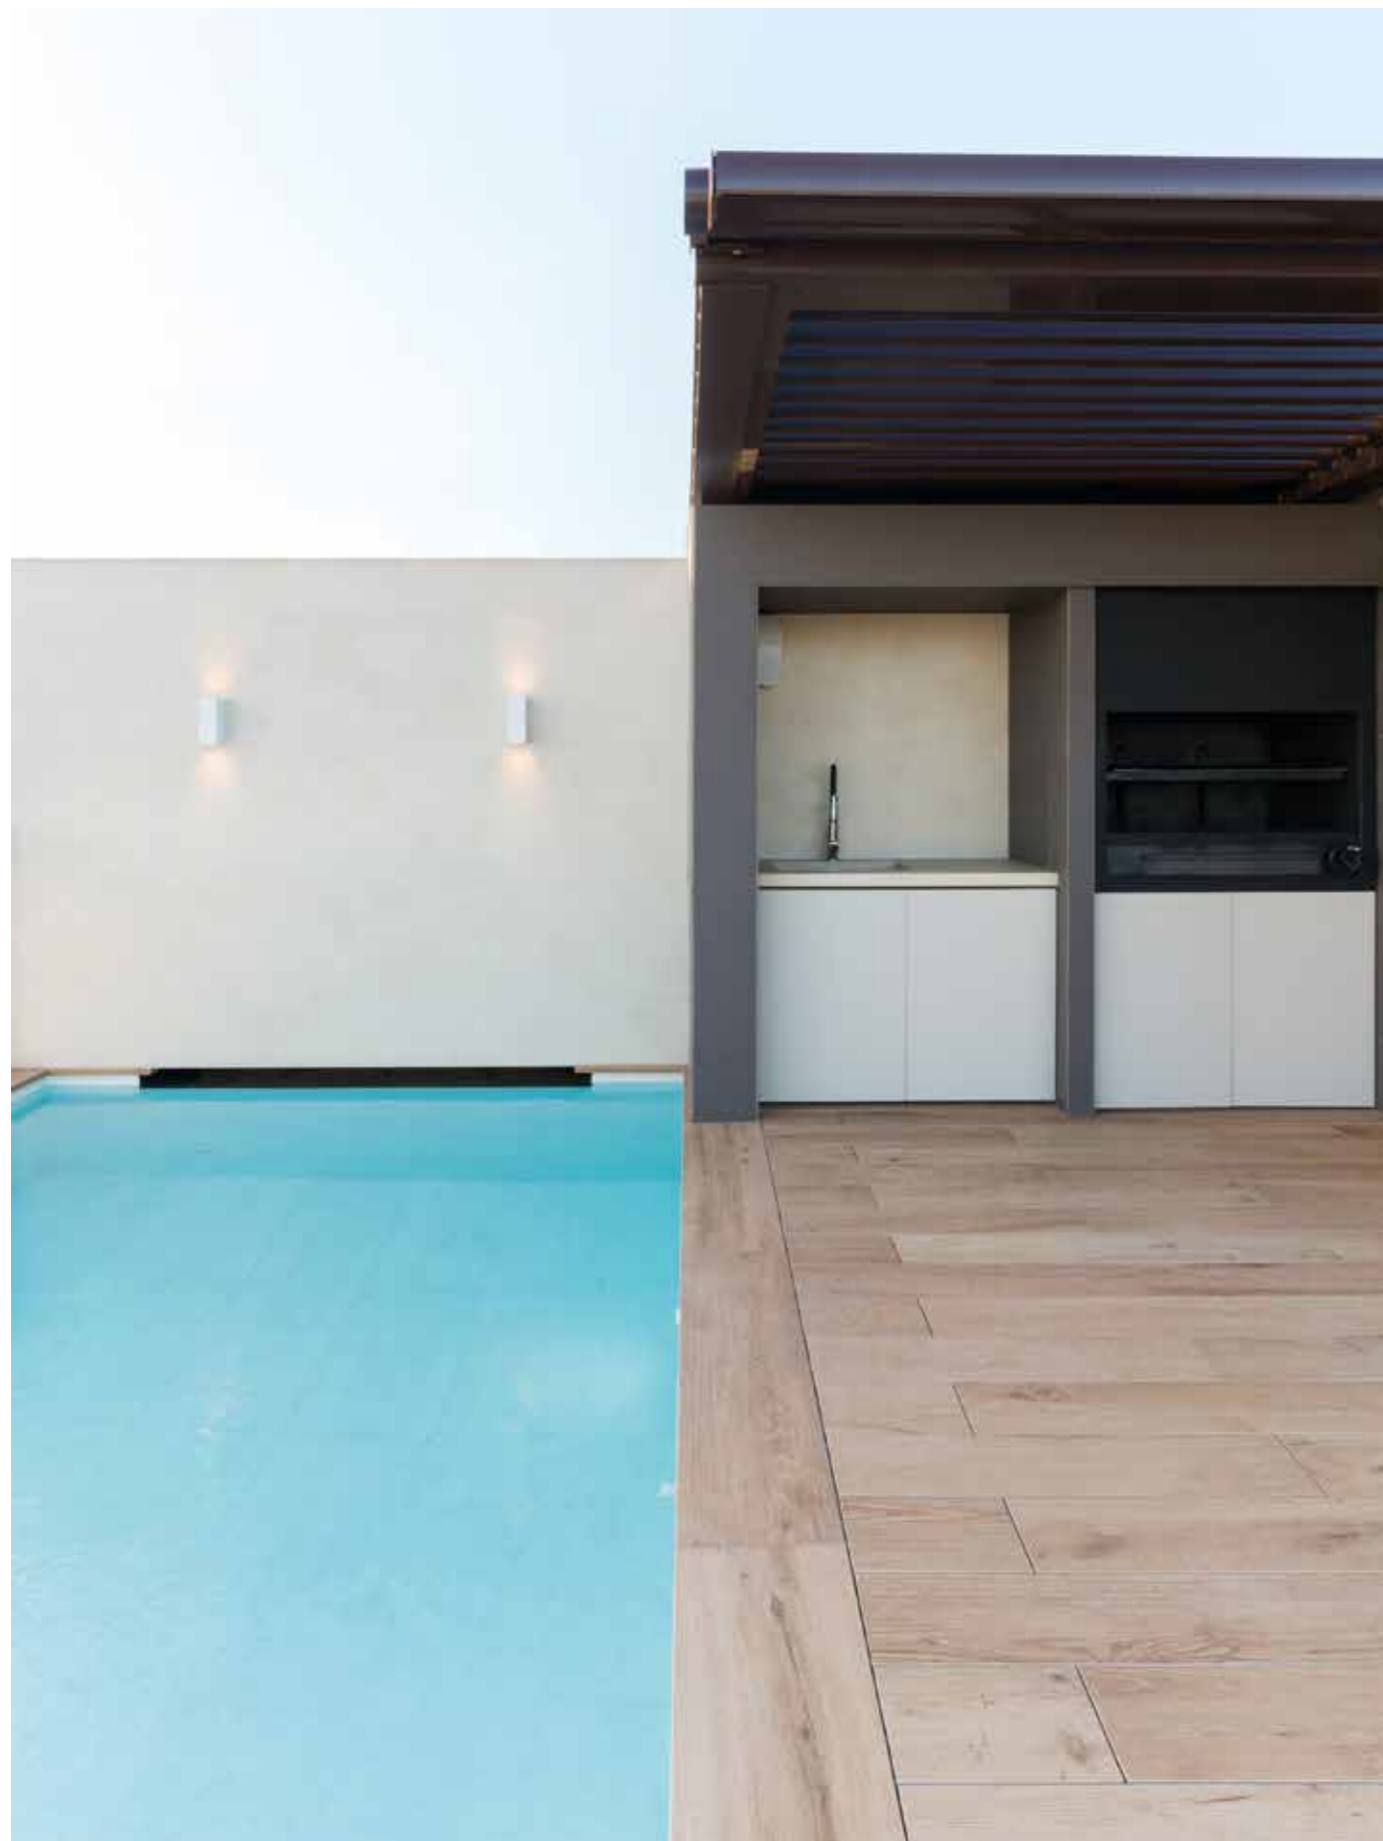

plots non adjustables (basic plot)

Type	No regulable - Apilable
Compression resistance	8.000 kg/unid.
Dimensions	100 x 100 mm y 115 mm de 0
Heights	10 mm 15 mm 20 mm



end profile for RAFx

butech's top profile is a solution to hide the aesthetic inconvenience that occurs when a step has to be made with the Raised Floor. This profile, in addition to hiding the edge of the ceramic piece, allows us to anchor a vertical piece to the plot to hide the body of the plots*.

Made of aluminum, and with a length of 1200mm, it can be used in thickened units (SAP: 100280081) with a 20mm depth, and in double-piece units (SAP: 100290783) with a 23mm depth. For a correct clamping of the vertical piece from its lower part, several units of the Lower Clip (SAP: 100253748) will be necessary.

*Option valid only for plot n



end profile for RAFx

SAP	
100280081	1200 mm thickened
100290783	1200 mm double-piece units
100253748	lower clip

vertical enclosure clip

These clips have two components: upper clip, fixed to the pedestal head, and lower clip, which goes on a previously cut pedestal base.

The perimeter panels are easily installed with these clips.

For a correct installation, the pedestal base has to be cut as shown in the images.

Only compatible with plot n

vertical enclosure clip

SAP	
100253729	vertical enclosure system lower clip upper clip





FLOATING STAIRS

SYSTEMS



Floating stairs

In architecture and in the construction sector in general, stairs are considered the main backbone of the room. It is a unique piece, both in its design and its functionality. Depending on the interior design, stairs can be subtly adapted to the interior design or highlight a specific area or element.

On the other hand, floating stairs expand the visual space and favour a better lighting of the environment.

A levitation effect is achieved where the steps, using the same units as the floor, rise through the space floating in the air.


Characteristics:

Customized steps are available, but the standard measurements are:

- Length: 80 / 90 / 100 / 120 cm
- Width: greater than or equal to 28 cm
- Thickness: greater than 9 cm

This system is designed to be used primarily indoors, but can be adapted to outdoor projects.

System elements:

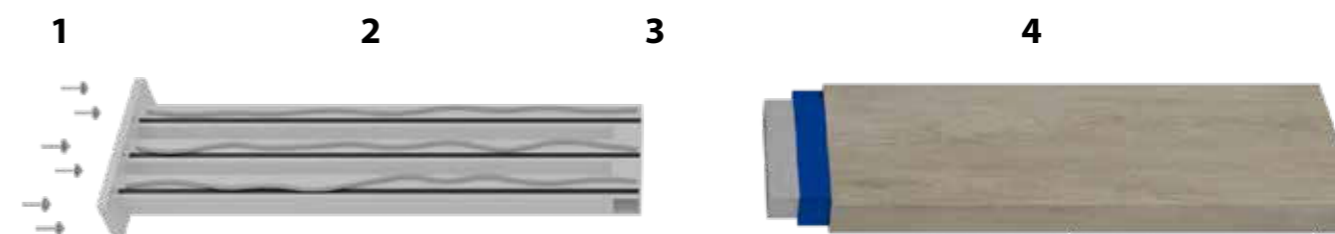

1. Anchoring: depends on the type of wall. Only available for concrete, solid brick and sheet metal walls.

2. Step core: steel structure (S275) with lacquered finish and lateral reinforcement for fixing the handrail.

3. Adhesive: reactive resin adhesive for fixing the box to the stair structure.

4. Step box: aluminium case covered with the PORCELANOSA Grupo flooring collection (EN 14411: 2012) chosen by the client. Supplied completely finished, ready to be installed.


* For a correct fixation, the union of these three elements will be made with a two-component epoxy adhesive.

KEY

***Iconography**

Product name: **one-flex Premium**

Product family: **CEMENT-BASED ADHESIVES**

Product picture: 

Product certifications and standards: **Certifications/Standards:** EN 12004 C2 TE S1

Product features:

- Features:** Excellent adherence. Flexible. Bonding material, with excellent mixing and application features. High initial adherence and no sagging. Thixotropic. Extended working times. Open time higher than 30 min. Application thickness from 2 to 15 mm. Broad spectrum in the percentage of mixing water:
 - one-flex premium white**: Mixing water: 8.1 - 8.9 L per 25 kg bag
 - one-flex premium grey**: Mixing water: 6.5 - 7.2 L per 25 kg bag
- Recommended uses:** Floors and walls with rectified tiles. Large format indoor porcelain wall tiles. Large format interior porcelain floor tiles and outdoor use. High traffic floor tiles. Floor tiles on radiant heating. Pools and damp environments. On bonded facades, replace mixing water with **unilax** additive.

Types of applications where the use of the product is recommended

Types of substrates where the use of the product is recommended:

- Substrates:** Cement-based screeds. Cement render. Concrete slabs and floors. Anhydrite screeds, having previously applied **uniprim**. Plasters, having previously applied **uniprim**. Large-format ceramic brick. Pre-existing tiles/mosaic/stones*. Plasterboard panels. Cement-based panels. Mixed with **unilax**, acoustic insulation **fonopacr**.
- Materials:** Large format ceramic tiles. High-absorption ceramic tiles and stoneware. Porcelain tiles. Glass mosaic. Natural stone and marble not prone to staining.

Types of materials where the use of the product is recommended

Product Coverage:

Small format and mosaic / Trowel U4:	2-3 kg/m ²
Medium format / Trowels U6-U8:	3-5 kg/m ²
Large format / Trowels U10-U12:	5-7 kg/m ²

Product name: **one-flex Premium**

















Value:

SAP	one-flex Premium	Presentation	Europallet	P/EU
100201526	one-flex Premium blanco	bag 25 kg	1000 kg/pallet	1.29 p/kg
100201543	one-flex Premium gris	bag 25 kg	1000 kg/pallet	1.23 p/kg
100277878	r-eco	bag 250 gr		1.02 p/u

Type of packaging for the product

Regardless of our recommendations for use indicated for this adhesive, respect the installation regulations in force in each country.
* super-prim improves the adherence on polished ceramics and glossy finishing tiles
Before using this product in any application not indicated in this catalogue, please perform a test or refer to the product's technical sheet.

*Iconography

				
Exterior floor	Exterior wall	Shower area	slight - moderate - hard pedestrian traffic	Non slip
				
Interior floor	Interior floor	Textured finish	Tone variations V3: moderate	Rectified
				
Matt	Raised Access Flooring	Technical grain	Slip resistance R11: Increased static friction R13: Very high static friction	(CTE) RD Slip resistance CL3: RD > 45
				
Exterior				



PORCELANOSA Showrooms

ESPAÑA

A CORUÑA

A CORUÑA_SUMINISTROS VIA-MAR, S.L. · Médico Rodríguez, 18-20. +34 981 279 431
A CORUÑA_BETANZOS SUMINISTROS VIA-MAR, S.L. · Avda. Fraga Iribarne, s/n +34 981 772 190
CARBALLO_JESUS PEDROUZO S.L. · Valle Inclán 24, Bajo +34 981 701 120
CARNOTA_CAPELO GARCIA, MANUEL FELIPE · LG San Mamed, s/n. +34 981 857 081
CEE_B_FANDIÑO LADO, S.L. · CL Valdepeñas, s/n. +34 981 748 003 +34 981 748 004
FERROL_NEIRA Y ORTEGAL, S.L. · Carretera Catabois, 258. +34 981 326 532 +34 981 324 951
MUIROS_ALMACENES CASTILLO DE MUROS, S.L. · Rosalía de Castro, 5. Pol. Ind. Muros +34 981 826 368
ORTIGUEIRA_NEIRA Y ORTEGAL, S.L. · Carretera C-642 s/n, Cuiña. +34 981 400 880
PUEBLA DEL CARAMIÑAL_PEREZ DOMINGUEZ PUEBLA, S.L. · Angustia, 30. +34 981 830 214
SANTA COMBA_ALMACENES SEROMAVI, S.L. · Avda. Santiago, 18. +34 981 880 104 +34 981 818 617
SANTIAGO DE COMPOSTELA_PORCELANOSA · General Pardiñas, 13-Bajo +34 981 569 230
SANTIAGO DE COMPOSTELA_PORCELANOSA · Rua Clara Campoamor, 13-15 (Montouto) +34 981 509 270
SANTIAGO DE COMPOSTELA_PORCELANOSA · Polígono Comercial Costa Vella +34 981 897 595

ÁLAVA

VITORIA-GASTEIZ ·JORGE FERNÁNDEZ · Polígono de Jundiz. Paduleta, 53. +34 945 244 250
VITORIA-GASTEIZ ·JORGE FERNÁNDEZ · Los Herrán, 30. +34 945 254 755 +34 945 259 668

ALBACETE

ALBACETE-PORCELANOSA · Avda. Gregorio Arcos, 32. (Pol. Campollano) +34 967 243 658 +34 967 193
465 VILLARROBLEDO_OLIVARES MAT. CONSTRUCCIÓN · Avda. Reyes Católicos, 168. +34 967 138 105

ALICANTE

ALCOY-SANEAMIENTOS COLON · Avda. de la Alameda, 10. +34 965 331 891 +34 965 524 210
ALTEA-ELDECO · Carretera N-332 Partida Cap Blanch, 38A. +34 966 874 360 +34 966 873 543
BENISSA-HIJOS DE JUAN RIBES · Avda. de la Estación, 2. +34 965 730 419
ELCHE-PORCELANOSA · Avda. Alicante, 105. +34 966 610 676 +34 966 610 700
JAVEA-AZULEJOS JAVEA · Liverpool, 4. +34 965 791 036
SAN JUAN-PORCELANOSA · Carretera Valencia, km 88. +34 965 656 200 +34 965 655 644

ALMERÍA

VÍCAR_PORCELANOSA · Parque Comercial Viapark, Parcela 1. +34 950 325 575 +34 950 338 651

ASTURIAS

GIJÓN-PORCELANORTE · S.L. Menéndez Pelayo 30. +34 984 396 462
OVIEDO-PORCELANOSA · Pol. Espíritu Santo. Calle Dinamarca, s/n. +34 985 791 526 +34 985 985 963

ÁVILA

ÁVILA_PAVIMARSA · Pol. Ind. Vicolozano · Parcela 2. +34 920 259 820 +34 920 259 821

BADAJOZ

HERRERA DEL DUQUE_JUBEL · Avda. Juan Carlos I s/n. +34 924 145 372
MÉRIDA_PORCELANOSA · Avda. Reina Sofia, 8. +34 924 330 218 +34 924 330 315
ZAFRA_MUNDO OBRAS · Pol. Ind. Los Caños, Calle Bodion, 27. +34 924 551 264 +34 924 551 264

BALEARES

CALA D'OR · MALLORCA_MACODOR · Carretera Calonge · Cala d’Or, km 1,5. +34 971 658 210
MANACOR · MALLORCA_MAT. DE CONSTRUCCION GALMES SA · Carrer Via Palma, 67. +34 971 553 050
MAHÓN_A PALLISER SL · Avda. Cap de Cavalleria, 1. +34 971 3573 00 +34 971 357 400
PALMA DE MALLORCA_PORCELANOSA · Gran Via Asima, 21. Pol. Son Castelló. +34 971 430 667
S. ANTONI PORTMANY_IBIZA PORCELANOSA · Avda. Llauradors, 7. Pol. Montecristo. +34 971 317 292
SOLLER_CAN SOLER · Del Mar, 193. +34 971 630 219 +34 971 632 311

BARCELONA

STA COLOMA DE GRAMANET_ÁLANTA SA · Ctra de la Roca km 5,6. +34 933 919011
BARCELONA_AZULEJOS SAN ANDRÉS · Plaça Mossen Clapes, 2-3. +34 933 455 102 +34 933 461015
BARCELONA_GIL DE NAPOLÉS · C/ Napolés. 87Barcelona. 655906329
BARCELONA_GRESS ARGENTONA · Pj Amics Argentona 2, Barcelona. +34 937 414716
CABRERA DE MAR_ORMAT · Carretera de Vilassar-Argentona km.1. +34 937 591 139 +34 937 502076
CALAF_PLANELL · Carretera Manresa km 31. +34 938 698 750 +34 938 600 181
CANOVELLES_COMERCIAL MAESTRO CANET · Pol. Can Castells, Nau 7-8. +34 938 466 568
CANTARA BARCELONA · C/ Valencia, 312, Barcelona. +34 935 216996
CANTARA SABADELL · Avinguda Rafael de Casanova, 24, Sabadell, Barcelona, +34 935 216991
CANTARA SANT FRUITOS · Pol. Casanova nau 2-7 · Ctra de Manresa a Berga Km 1. +34 935 216992
CORNELLA_LOFT CUINA · Carrer La Miranda, 6-8 +34 934 743 793 +34 934 741 305
CASSERES_MATERIALS CASSERRE · San Rafael +34 938 213 770
CUBELLES_MA-CO · Carrer Penedes-C/La Selva Pol.Ind. Les Salines +34 938 954 141 +34 938 954 142
CASTELLDEFELS_INDECOR FELS SL · AV · CONSTITUCION Nº 71 NAVE 3. +34 936 342507
GIRONELLA_ANTONI PONT · Carrer Farguell, 31. +34 938 228 088 +34 938 250 786
L'HOSPITALET DE LLOBREGAT_PORCELANOSA · Ciències, 65. Gran Via l’Hospitalet +34 932 642 500
MATARÓ_MARESME GRES · Carrer Sant Isidor, 78 +34 931 615 015
MATARÓ_ROSA JORDANA RABETLLAT · Carrer de Montserrat, 7 +34 937 903 089
PALAU SOLITA I PLEGAMANS_COMERCIAL SOLSAN · Cami Reial, 109. +34 938 648 125 +34 938 649617
PINEDA DE MAR_AMARGANT · Carrer Santiago Rusiñol, 96. +34 937 671 416 +34 937 627 488
POL DE MAR_AMARGANT · Passeig Parc. 1. +34 937 600 112 +34 937 600 411
SANT SADURNÍ D'ANOIA_COMERCIAL STC · Rambla Generalitat, 59. +34 931 593 137 +34 931 615 015
TARADELL_JODUL · Carretera de Vic, km 5,8 +34 938 800 800 +34 938 126 054
TORELLÓ_ARQUIMATT MATERIALS I DECORACIÓ · Carrer Sant Jordi, 16. +34 679 531 877
SANT BOI DE LLOBREGAT_GARRO · Ctra. Sta. Creu de Calafell, km 10,7. +34 936 545952 +34 938400620
SANTA MARIA DE PALAUTORDERA_JRIFERA MAGATZEM CONSTRUCCIÓ · Carretera Antigua Via Provincial, 20 ST.PERE DE RIBES-SUMCO · Carretera de Barcelona, C-246 km. 42,4. +34 938 933 066
VIC_CORRETTJA · Carrer Mas de Bigas, 8-26. +34 938 854 261 +34 938 894 733
VILAFRANCA DEL PENEDES_FERRETI I CASULLERAS · C/Sant Martí, 2. +34 93 890 14 19 +34 93 8170353
VILANOVA DEL CAMÍ_PLANELL · Carretera Vilafranca 108-111. +34 938 060 240 +34 938 060 239

BURGOS

BURGOŚ-BIGMAT FONTECHA · Alcalde Martín Cobos,15. Nave 5 y 6. +34 947 485 153 +34 947 483 941
MIRANDA DE EBRO-JORGE FERNÁNDEZ · Camino Fuente Basilio, s/n. +34 947 323 351 +34 947 314 589

CÁCERES

CÁCERES_PORCELANOSA · Avda. Juan Pablo II, 130. +34 927 236 337 +34 927 236 205
MORALEJA_BIGMAT CAYUELA · Avda. Extremadura, 26. +34 927 515 198 +34 927 147 266
NAVALMORAL DE LA MATA_MAGERVYSA · Calle Rio Salor, 83. +34 927 535 234 +34 927 535 575

CÁDIZ

ALGECIRAS_PORCELANOSA · Carretera de Málaga, km 109. +34 956 635 282 +34 956 635 285
EL PUERTO STA. MARÍA_PORCELANOSA · Pol. El Palmer. Ctra. Madrid-Cádiz, km 653,2. +34 956 540084
SAN FERNANDO_PORCELANOSA · Polígono Tres Caminos, s/n. +34 956 592 360

CANTABRIA

SANTANDER_PORCELANOSA · Avda. Parayas, s/n. +34 942 352 510 +34 942 352 638

CASTELLÓN

CASTELLÓN_PORCELANOSA · Parque Comercial Estepark / Av. E.Gimeno s/n. +34 964 506 800
VINAROZ_PORCELANOSA · Carretera N-340, km 1.050,1. +34 964 400 944 +34 964 400 650

CEUTA

CEUTA_BAEZA · Ampliación Muelle de Poniente, 96. +34 956 511 312 +34 956 511 309

CIUDAD REAL

CIUDAD REAL_PORCELANOSA · Carretera de Carrión, 11. +34 926 251 730 +34 926 255 741
LA SOLANA_LOS PEPOTES · Calle Emilio Nieto, 39. +34 926 63 15 80 +34 926 63 38 56

CÓRDOBA

CÓRDOBA_PORCELANOSA · Carretera N-IV, km 404. Pol. de Torrecilla. +34 957 760 024 +34 957 760 123
LUCENA_NEIKU CONCEPT · Avda. Miguel Cuenca Valdivia, 6. +34 957 513 702
MONTILLA_ALMACENES MANOLIN Y LUIS S.L. · +34 957651509 +34 957653253

CUENCA

CASAS DE HARO_MAT. DE CONSTRUCCIÓN MARTÍNEZ ORTEGA · Calle 2 de Mayo, 28 +34 969 380708
CUENCA_VICOSAZ · Hermanos Becerril, 6 bajo. +34 969 233 200 +34 969 234 475
TARANCÓN_VICENTE DE LOS RIOS · Avda. del Progreso, 19. +34 969 321 323 +34 969 321 334
VILLANUEVA DE LA JARA_ALMACENES PAÑOS · Camino de Rubielos, 8. +34 967 498 000

GERONA

CANET DE LA TALLADA_SERVIMAT INICIATIVES · Carretera C-31 km. 354 +34 972 780 524
ESCLANÝA BEGUR_MAT. CREIXELL · C/Palafrugell Regencos. Pol. ind. Riera Esclanya, 1. +34 972 300 628
GIRONA_PORCELANOSA · Carretera Barcelona 120-122-124. +34 972 964 141
LLORET DE MAR_CARMONA · Carretera de Lloret_Vidreres 2,1. +34 972 372 710 +34 972 349 763
MONT-RAS_MERCAMAT · Carretera C-31 km. 329,8. +34 972 612 027 +34 972 302 146
PALAMOS_TG NOVA ARQUITECTURA · Avgda. Catalunya,91 +34 972 312 250 +34 972 312 249
SARRIA DE TER FERRER_CERVIÀ · Avgda. de França, 192. +34 972 173 442 +34 972 173 456
VILA-SACRA_FRIAS MATERIALS · Carrer Castelló, 72. +34 972 670 073 +34 972 673 071

GRANADA

ARMILLA_TECMACER · Avda. San Rafael (Junto Sprinter). +34 958 253 081 +34 958 183 367

GUIPÚZCOA

SAN SEBASTIÁN_JORGE FERNÁNDEZ · Pol. Ind. Belartzta. Fernando Múgika, 15. +34 943 376 966 +34 943 376 841

HUELVA

HUELVA_PORCELANOSA · Polígono La Paz Naves 1-5 +34 959 543 600 +34 959 237 951

HUESCA

AINSA_COMERCIAL CAMPODARVE · Pol. Ind. Sobrarbe, Naves 11 y 12. +34 974 500267 +34 974 500865
FRAGA_BERGES CENTRO COMERCIAL · Avda. Aragón, 70. +34 974 471 439 +34 974 471 439
HUESCA_PORCELANOSA · Pol. Sepes. Calle Ronda la Industria 1-3 Nave C. +34 974 242 738

JAÉN

ALCALA LA REAL_PAVIMENTOS AZUGRISA · Pol. Ind. Fte. Granada Vial II. +34 953 582 963
JAÉN_PORCELANOSA · Polígono Olivares. Carretera Bailén-Motril, km 323. +34 953 280 757 +34 953 284 035
LINARES_HERNÁNDEZ GÁMEZ · Ctra. Torreblascopedro s/n. +34 953 693 423 +34 953 693 444
ÚBEDA_HERNÁNDEZ GÁMEZ · Avda. de la Libertad, 88. +34 953 795 168 +34 953 795 168

LA RIOJA

LOGROÑO_RIOJACER · Avda. de Burgos, 43-45. +34 941 286 021 +34 941 202 271

LAS PALMAS

LAS PALMAS DE GRAN CANARIA_PORCELANAS Y PAVIMENTOS CANARIOS · Avda. Mesa y López, 61 +34 928 472 949 +34 928 472 944

LEÓN

PONFERRADA_DISEÑARTE BIERZO, S.L. · Avda. Galicia 380. +34 987 455 870
SAN ANDRÉS DEL RABANEDO_PORCELANOSA · Carretera León-Astorga, km 3,5 +34 987 801 570 +34 987 801 475

LÉRIDA

BALAGUER_J. FARRÉ · Carrer Urgell, 39. +34 973 445 765 +34 973 445 072
EL PONT DE SUERT_PRETENSADOS RIBERA · Ctra. N-230 km 124,5. +34 973 690 063 +34 973 690 400
LLEIDA_MATERIALS GERMANS MAURI · Carrer Princep de Viana, 36. +34 973 232 139 +34 973 247 943
LLEIDA_PUJOL ELEMENTS · Carrer Tarragona, 40. +34 973 202 350 +34 973 203 113
SOLSONA_MATERIALS JORDI VILAR · Carretera Manresa, s/n km.50. +34 973 482 077 +34 973 482 373
TARREGA_NOUMAG · Júpiter, 7 (Pol. Ind. La Canaleta) +34 607 497 330
VIELHA_PRETENSADOS RIBERA · Carretera França, 40. (Mig Aran) +34 973 641 460 +34 973 642 271

LUGO

CHANTADA_SONIA GOMEZ GOMEZ · Juan XXIII, Bajo 22 +34 982 441 249 +34 982 440 331
FOZ_ALMACENES BAHIA, S.L. · Maestro Lugilde, 6. +34 982 140 957 +34 982 132 065
LUGO_ARIAS NADELA, S.L. · Tolda de Castilla, s/n. +34 982 245 725 +34 971 662 816
LUGO_ARIAS NADELA, S.L. · Crta. N-VI, Km. 498 (Pol. Do Cea0) +34 982 221 254
XOVE_ESTABLECIMIENTOS REY, S.L. · Avda. Diputación, 88. +34 982 592 006 +34 982 592 071

MADRID

ALCORCÓN_PORCELANOSA · Carretera N-V, km 15,5. Parque Oeste de Alcorcón +34 916 890 172
LEGANÉS_PORCELANOSA · Avda. Recomba, 13. Pol. la Laguna Salida 53 - M50 +34 914 819 200
MADRID_EL CORTE INGLÉS CASTELLANA · Paseo de la Castellana, 85. +34 671 708 692
MADRID_PORCELANOSA · Ortega y Gasset, 62. Esq. Conde Peñalver +34 914 448 460 +34 914 025 111
MADRID_PORCELANOSA · Alcalá, 514. +34 917 545 161 +34 917 545 555
SAN SEBASTIÁN DE LOS REYES_PORCELANOSA · Plaza del Comercio, 17. +34 916 623 232

PORCELANOSA Showrooms

ESPAÑA

MÁLAGA

MÁLAGA_PORCELANOSA · Victoria de los Ángeles, 1. +34 952 241 375 +34 952 240 092
MARBELLA_PORCELANOSA · Ricardo Soriano, 65. +34 952 826 868 +34 952 822 880
NERJA_PAVISER NERJA, S.L. · Pol. Pto. Limpio Maz. 3 Parcela 12. +34 952 524 223 +34 952 524 223
VÉLEZ-MÁLAGA_MATERIALS MUÑOZ PÉREZ SL · Ferrocarril, 2. +34 952 507 879 +34 952 504 760

MELILLA

MELILLA_FERRETERIA MODERNA E HIJOS, S.L. · Paseo Marítimo Mir Berlanga, 19. +34 952 671 144

MURCIA

MURCIA_PORCELANOSA · Avda. Juan de Borbón, s/n. Parque Comercial Thader +34 968 879 527

NAVARRA

CINTRUÉNIGO_CERÁMICAS CECILIO CHIVITE · Pol. Ind. s/n. Variante N-113. +34 948 811 973
NAVARRA_MULTIVA BAJA MONTEJO CERÁMICAS · Pol. Ctra. Tajonar, Calle-A, Naves 2- 4 +34 948 239
065 PAMPLONA_MONTEJO CERÁMICAS· Navas de Tolosa, s/n. +34 948 224 000 +34 948 226424
TUDELA_MONTEJO CERÁMICAS · Ctra. Tudela -Tarazona, Pol. Centro Servicios Tudela +34 948 848 365

ORENSE

CARBALLIÑO_JOSE R. PITEIRA, S.L. · Avda. Julio Rodríguez Soto, 63. +34 988 271 071 +34 988 274 780
OURENSE_BLANCO QUINTAS, S.A. · Avda. Otero Pedrayo, 8. +34 988 391 478
VERIN_MAT. DE CONSTRUCCION ER-CA, S.L. · Avda. de Portugal, 44. +34 988 411 030 +34 988 411 181

PALENCIA

PALENCIA_CANTALAPIEDRA · La Puebla, 2. +34 979 706 421 +34 979 702 652

PONTEVEDRA

A ESTRADA_DALARJO, S.L. CL · Alto de la Cruz, s/n +34 986 570 489 +34 986 570 610
DENA - MEAÑO PREFABRICADOS DENA, S.L. RUA DE GALICIA, 24 +34 986 743 121 +34 986 745 131
LALÍN_ALMACENES CANDA, S.L. · Monserrat, 36-39. +34 986 780 184 +34 986 782 301
O GROVE PREFABRICADOS DENA, S.L. C/ALEXANDRE BOVEDA, 82 +34 986 702 041 +34 986 733415
SEIXO, MARÍN_SANEAMIENTOS ROSALES, S.L. · Avda. Doctor Otero Ulloa, 1. +34 986 702 041
SILLEDAS_ARCOLAR 2000, S.L. · Rua de Venezuela, 40. +34 986 580 114 +34 986 592 513
VIGO_SANEAMIENTOS ROSALES, S.L. · García Barbón, 139 B. +34 986 228 806
VILAGARCIA DE AROUSA_SANEAMIENTOS GANDARA · Avda. La Marina, 126-128 Bajo +34 986 506 640

SALAMANCA

VILLARES DE LA REINA_PORCELANOSA · Pol. Villares. Ctra. Salamanca-Valladolid, km 2,2 +34 923243811

SEGOVIA

EL ESPINAR_SEGOCER · Carretera Madrid - La Coruña, km 64. +34 921 172 426 +34 921 171 828
SEGOVIA_SEGOCER · José Zorrilla, 134. +34 921 444 122

SEVILLA

ESTEPA_MATAS INTERIORISMO SL · Avda. Andalucía. Salida Málaga. +34 955 915 937 +34 955 915 938
LORA DEL RÍO_HERNÁNDEZ CARBALLO · Betis s/n. +34 955 800 473 +34 955 801 439
SEVILLA_PORCELANOSA · Tipografía, s/n. Pol. Industrial La Negrilla. (A-92 dir. Granada) +34 954 260540
TOMARES_PORCELANOSA · San Roque, s/n. Polígono El Manchón. +34 954 152 792 +34 954 153 188

SORIA

MATERIALES ODORICIO · Pol. las Casas-II. Calles A y J, Parcela 201 +34 975 233 228 +34 975 232 188

STA. CRUZ DE TENERIFE

STA. CRUZ DE TENERIFE_PORCELANAS Y PAVIMENTOS CANARIOS · Avda. 3 de Mayo, 18. +34 922 209 595

TARRAGONA

ALCOVER_EXPOMAT ALCOVER · Tramuntana, s/n. (Polígono Roques Roges) +34 977 760 476
EL VENDRELL_COMERCIAL STC · Carrer Terrissaires, 1. +34 977 661 951
EL VENDRELL_VIUDA DE ANTONIO FONT · Carrer de Valls 12. +34 977 660 794 +34 977 662 217
LES BORGES DEL CAMP_EXPOMAT LES BORGES · Ctra Alforja s/n. 660105371
MORA LA NOVA_COMERCIAL LLAURADO · Carretera de Tivissa, s/n. +34 977 400 387 +34 977 400 052
RODA DE BARA_CONSTRUCCIONS CIURO · Acceso a Roda de Bara km 1. +34 977802951 +34 977802012
TARRAGONA_MATERIALS GISBERT · Carrer Francesc Macia, 4. +34 977 242 363
TARRAGONA_TINALEX ARTE · Carretera Valencia, 202 0
TARRAGONA_TINALEX ARTE · Carretera Pont d'Armentera, 1 0
TORTOSA_MATERIALS GISBERT · Carretera Gandesa km 3,5. +34 977 500 306 +34 977 501 550
VALLS_RAMON MAGRIÑA BATALLA · Carrer Montblac, 14. +34 977 600 210 +34 977 603 302

TOLEDO

TOLEDO_PORCELANOSA · Pol. Ind. Santa María Benquerencia, C/del Río Marchés,123. +34 925 232 402

VALENCIA

ALBUIXECH_PORCELANOSA · Avda. del Mediterráneo, Parcela 6. Pol. ind. Mediterráneo. +34 961 417 227
REQUENA_PORCELANOSA REQUENA · Carmen, 6 - Bajo. +34 960 11 56 67
SEDAVÍ_PORCELANOSA · Avda. Mediterráneo, s/n. Zona Comercial Sedavi. +34 963 185 021
VALENCIA_PORCELANOSA · Colón, 58. +34 963 530 230 +34 963 531 688

VALLADOLID

VALLADOLID_CANTALAPIEDRA · Carretera de Soria A-24, km 5,5. +34 983 217 010 +34 983 200 921

VIZCAYA

AMOREBIETA_BILBU · Barrio Boroa, s/n. +34 946 731 158 +34 946 733 265
BILBAO_BILBU · Alameda Recalde, 39 - 41 +34 9

PORCELANOSA Showrooms

INTERNACIONAL | **INTERNATIONAL**

INTERNACIONAL | **INTERNATIONAL**

INTERNACIONAL | **INTERNATIONAL**

INTERNACIONAL | **INTERNATIONAL**

INTERNACIONAL | **INTERNATIONAL**

ALEMANIA
ACHERN_E_WERTHEIMER GMBH · +49 07841 6309 1300
ALZEY_J.N.KOEBIG GMBH · +49 6731 4880
ASCHAFFENBURG_KALKWERKE · +49 (0) 60 213 601 62 +49 (0) 60 213 602 93
BAD SALZUFLEN_W.LINNENBECKER GMBH · +49 (0) 5222 / 5301 221 +49 (0) 5222 / 5301 209
BADEN BADEN_E.WERTHEIMER GMBH · +49 (0) 7221 50020 +49 (0)722117080
BALLENSTEDT_FLIESEN SCHREIBER · +49 39485 95201
BAUTZEN_FLIESEN LEHMANN GMBH · +49 (0) 3591 / 3726 32 +49 (0) 351 / 8931420
BAYREUTH_FLIESEN EHRlich & CO. GMBH · +49 (0) 9 21 / 15 12 799-0
BERGISCH GLADBACH_SCHMIDT-RUDERSDORF GMBH & CO · +49 (0) 2204 / 4007 0 771 +49 (0) 3320 / 854715 BERLIN_FLIESENPARADIES GLAESKE + SEFZIG GMBH · +49 (0) 30 650 737 0
BERLIN_FLIESENPARADIES GLAESKE + SEFZIG GMBH · +49 (0) 30 565 555 90
BERLIN_KERANA KERAMIK- UND NATURSTEINHANDEL GMBH · +49 (0)30 318683-16/-19
BERLIN_W.LINNENBECKER GMBH & CO. KG · +49 (0) 30 / 756 888 +49 (0) 30 / 756 88 756
BONN-BUSCHDORF_SCHMIDT-RUDERSDORF- BONN · +49 02 28 - 55 916-0
BOTTROP_W.LINNENBECKER GMBH & CO. KG · +49 (0) 2041 / 7958 13 +49 (0) 2041 / 7958 10
BRAND-ERBISDORF_FLIESEN THOMAS GMBH · +49 (0) 37322 18 0
BREMEN_W.LINNENBECKER GMBH & CO. KG · +49 420252190
BURG_WIEDEMANN INDUSTRIE UND HAUSTECHNIK GMBH · +49 39163103513
BURGSTÄDT_FLIESEN THOMAS GMBH · +49 (0) 3724 / 1856 0 +49 (0) 3724 / 1856 70
DORTMUND_W.LINNENBECKER GMBH & CO. KG · +49 (0) 231 / 562 090 22 +49 (0) 231 / 562 090 88
DÜSSELDORF_SCHMIDT RUDERSDORF DÜSSELDORF · +49 (0) 211 6350112
DÜSSELDORF_SCHMIDT RUDERSDORF VIERSEN · +49 (0) 2162 816360
EISENACH_FLIESENZENTRUM GMBH ERFURT · +49 (0) 3691 882175
EISENBERG_J.N. KOEBIG GMBH · +49 6351 1450
EISINGEN_FLIESENWELT EISINGEN GMBH · +49 (0) 9353 98 46 357 +49 (0) 9353 98 46 359
ELTERLEIN_MIRKO GLEISS · +49 (0) 37349 / 7305 +49 (0) 37349 / 6093
ERFURT_FLIESENZENTRUM GMBH ERFURT · +49 3614270720
ERKRATH_W.LINNENBECKER GMBH · +49 (0) 211 / 92503 19 +49 (0) 211 / 92503 34
FRIBURG_GÖTZ & MORIZ GMBH · +49 (0) 76 145 180 +49 (0) 76 145 711 2
FULDA_OSWALD FLIESEN UND SERVICE GMBH & CO KG · +49 (0) 66 194 151 0 +49 (0) 66 194 151 40
GERA_BAUSTOFFE GEBR.LÖFFLER GMBH · +49 (0) 365 430 701 9 +49 (0) 365 430 701 4
GERA_FLIESEN THOMAS GMBH · +49 (0) 365 55285-0
GÖRLITZ_FLIESEN-PEDERSEN GMBH · +49 (0) 3581 / 402809 +49 (0) 3581 / 409166
GOTHA_FLIESENZENTRUM GMBH ERFURT · +49 (0) 3621 5144880
GÖTTINGEN_F+B FLIESEN UND BAUSTOFF MARKT · +49 551 998710
GREIZ_BAUSTOFFE GEBR.LÖFFLER GMBH · +49 36 61 / 70 50-0
HAMBURG -LURUP_CROONEN FLIESENHANDEL GMBH · +49 (0) 40 / 83383 377 +49 (0) 40 / 83383 301
HANNOVER_W.LINNENBECKER GMBH & CO. KG · +49 (0) 511 / 438 900
HEIDENAU_FLIESEN EHRlich & CO. GMBH · +49 (0) 35 29/- 52 85-0
HOF_FLIESEN THOMAS GMBH · +49 (0) 9281 86005-0
HUNGEN_MÜHL 24 · +34 (0) 6402 5200-0
JENA_FLIESENZENTRUM GMBH ERFURT · +49 (0) 3641 - 53257-0
KIEL_HEINRICH'S FLIESENMARKT GMBH · +49 (0) 431537340 +49 (0) 431529141
KOBLENZ_J. N. KÖBIG GMBH KOBLENZ · +49 (0) 26 198 169 20 +49 (0) 26 198 169 10
KRANICHFELD_MÜHL 24 KRANICHFELD · +49 (0) 36 450 330 +49 (0) 36 450 332 89
LAUF A. D. PEGNITZ_FLIESEN EHRlich & CO. GMBH · +49 (0) 91 23/ 97-11-0
LEIPZIG_FLIESEN THOMAS GMBH · +49 (0) 341 308558-0
LEIPZIG_GRAMER GMBH · +49 341 2346430
LEVERKUSEN_SCHMIDT-RUDERSDORF- LEVERKUSEN +49 02 14 - 8 68 13 0 +49 02 14 - 8 68 13 0
LÖBNITZ_SACHSENKERAM GBR · +49 (0) 34208 / 7400 +49 (0) 34208 / 7400
LÖRRACH_GÖTZ & MORIZ GMBH · +49 7621 4007100
LÜBECK_HEINRICH'S FLIESENMARKT GMBH · +49 (0) 451896669 +49 (0) 4518973494
MAINZ_J. N. KÖBIG GMBH MAINZ · +49 061 316 943 10 +49 061 316 942 75
MAINZ_J.N. KOEBIG GMBH · +49 6131694328
MESCHEDI_W.LINNENBECKER GMBH & CO. KG · +49 (0) 291 / 952 82 21 +49 (0) 291 / 952 82 82
MÜNCHEN_CERAMICAS OHG · +49 (0) 89 318 280 0 +49 (0) 89 318 280 20
MÜNSTER_W.LINNENBECKER GMBH & CO. KG · +49 (0) 251 / 979 12 21 +49 (0) 251 / 979 1220
NÜRNBERG/HAFEN_HEINRICH CHRIST GMBH & CO. KG · +49 (0) 91 164 318 0 +49 (0) 91 164 318 50
OFFENBURG_MAIER + KAUFMANN GMBH · +49 (0) 78196780 +49 (0)781967890
POTSDAM_KERANA KERAMIK- UND NATURSTEINHANDEL GMBH · +49 (0) 33208 547-0 +49 (0) 03381 7304501 PULHEIM_SCHMIDT RUDERSDORF PULHEIM · +49 (0) 2238 839790
RADEBEUL_FLIESEN EHRlich & CO. GMBH · +49 (0) 351 / 89314 10 +49 (0) 351 / 89314 20
SAALFELD_FLIESENZENTRUM GMBH ERFURT · +49 (0) 3671 52800
SCHRAMBERG_SULGEN ARMBRUSTER GMBH · +49 (0) 7422 28008-0 +49 (0) 7422 28008-20
SCHRIESHEIM_FLIESEN GALERIE SENGEWITZ · +49 6203 955330 +49 6203 955 33 29
SCHWARZENBERG_FLIESEN THOMAS GMBH · +49 (0) 3774 13930 30
SPEYER_SCHULTZ BAUZENTRUM GMBH & CO. KG · +49 6232/ 64620 +49 6232/ 646250
STEINACH_MAIER + KAUFMANN GMBH · +49 (0)7832 - 796 0
TRIER_SCHOLTES HANDELS GMBH · +49 651 9186611
UNTERGRUPPENBACH_KONZ & SCHAEFER HANDEL GMBH · +49 (0) 71312037480 +49 (0) 71312037489
VÖLKLINGEN_NIEDERER GMBH +49 (0) 68 989 802 21 +49 (0) 68 989 802 30
WAIBLINGEN_KONZ GMBH · +49 (0) 7151149200 +49 (0) 710510149-209
WÜRSELEN_SCHMIDT-RUDERSDORF- WÜRSELEN · +49 (0) 24 05 - 41 38 50 +49 (0) 24 05 - 41 38 55
ZWETHAU_GRAMER GMBH · +49 (0) 3421 / 7327 18 +49 (0) 3421 / 7326 73

ALBANIA

TIRANA_ALBA CERAMICA · +355 4 83 00 084 +355 4 83 00 084
TIRANA_ALBA CERAMICA PORCELANOSA GRUPO · +355 4 22 33 817 +355 4 22 33 817

ANGOLA

LUANDA_PORCELANOSA ANGOLA · +244 928463705 +244 222372374

ARABIA SAUDÍ

AL AHSA (Al-Sharqiyya)_KHALED AL ANSARI SHOWROOM · +966 3 5892888 +966 3 5817043
DAMMAM (Al-Sharqiyyal)_KHALED AL ANSARI-VALENCIA SHOWROOM · +966 3 8180355
DAMMAM_MANART AL ANDALOS DAMMAM · (+)966 12 6768441
Hafuf_Manart Al Andalos Al Ahsa · (+)966118102824
JEDDAH_MANART AL ANDALOS JEDDAH · (+)966 12 6768443 (+)966 12 6768440
RIYADH_MANART AL ANDALOS RIYADH · (+)966 11 8102512
RIYADH_MANART AL ANDALOS RIYADH · (+)966 11 4568383
DAMMAM_MOHAMMED M. AL DOSSARY STORES · 38348681 38340086
RIYADH_MOHAMMED M. AL DOSSARY STORES CO · (0)114884006

ARGELIA

ALGER_NOVACASA · +213 21 55 07 37 +213 23 94 74 46
ORAN_PORCELANOSA ORAN · 14237002361

ARGENTINA

BUENOS AIRES_BLAISTEN S.A. · +54 11 463 620 00 +54 11 463 614 86
BUENOS AIRES_SHOWROOM PORCELANOSA VENIS · +54 11 4776 3008 +54 11 4776 3008
MAR DE PLATA_IMEPHO · +54 223 481 3827
MENDOZA_VICTOR GULLO · +54 261 431 4200

ARMENIA

YEREVAN_SACO & ARARAT-SALON BOMOND · +37 410 55 08 99 +37 410 50 05 50

ARUBA

ORNAJESTAAD_BANJOLUX · +297 588 0565

AUSTRALIA

ADELAIDE_ITALIA CERAMICS · +61 8 8336 2366
BRISBANE_EARP BROTHERS · +61 7 3088 8999
HOBART_ROSSETTO TILING · +61 3 6231 2931
LAUNCESTON_ROSSETTO TILING · +61 3 6326 4955
MELBOURNE_EARP BROTHERS · +61 3 9328 9588
NEWCASTLE_EARP BROS TILE - NEWCASTLE · +61 2 4962 5500
PERTH_CERAMO · +61 8 9445 1777
SYDNEY_EARP BROTHERS · +61 2 9410 3222

AUSTRIA

ANSFELDEN_BEINKOFER · +43 (0) 7229 78525 +43 (0) 7229 88818 - 50
BRUCK/MUR_TENNE BRUCK · +43 3862 588 44 +43 3862 588 44-22
GRAZ_FLIESEN TENNE · +43 316 262 524 0 +43 316 262 524 22
HALL_BEINKOFER BEI HOLTER · +43 (0) 5223 5046910 +43 (0) 5223 5046919
INSBRUCK_FLIESEN CENTER TIROL · +43 (0) 512 364444
LEIBNITZ_TENNE LIBNITZ KINDERMANN BAD & HEIZTECHNIK · +43 3452 707-65 +43 3452 707-29
LINZ_BEINKOFER · +43 732 776 543 0 +43 732 776 543 60
LINZ_BEINKOFER · +43 (0) 732 6552550 +43 (0) 732 65525520
SALZBURG_BEINKOFER BEI HOLTER · +43 (0) 662 469096920 +43 (0) 662 469094289
VÖSENDORF_TENNE VÖSENDORF · +43 1 699 33 33 +43 1 699 33 33-22
WELS_BEINKOFER BEI HOLTER · +43 (0) 7242 25253210 +43 (0) 7242 25253250
WIEN_BEINKOFER · +43 (0) 50 483-6940
WIEN_BEINKOFER BEI HOLTER · +43 (0) 1 61516006900 +43 (0) 1 61516006909
WIEN_BEINKOFER GMBH · +43 50 483 6950
WIEN_TENNE WIEN 22 BADKULT-NORT · +43 1 20 20 520 +43 1 20 20 520-20
WIEN_BEINKOFER BEI BÄDERPARADIES · +43 (0) 1 52242200 +43 (0) 1 522422020

AZERBAIYÁN

BAKU_AKSESUAR INSAAT · +994 12 546 74 86 +994 12 546 74 86

BAHAMAS

NASSAU_TILE KING - BUILDERS MALL · +1 242-601-8453

BAHRÁIN

MANAMA_AL ABBAS GALLERY · +973 741 919 +973 741 747

BARBADOS

BRIDGETOWN_KEYSTONE PRODUCTS · +1 246-418-8453

BANGLADESH

PORCELANOSA_DHAKA · +880 1793 567404

BÉLGICA

HEIST-OP-DEN-BERG_PGB CERAMICA NV · +32 (0)15 253366 +32 (0)15 253367

BERMUDAS

PEMBROKE_PEMBROKE TILE & STONE CO. LTD · +441 292 8453 +441 295 8453

BIELORRUSIA

MINSK_SAN REMO · +37 17 388 06 66

BOLIVIA

SANTA CRUZ DE LA SIERRA_TAGOMAGO · +591 776 748 25

BOSNIA-HERZEGOVINA

BIJELJINA_LUK D.O.O. · +387 55 228 100 +387 55 228 101
CITLUK_BROTIS D.O.O. · +387 36 650 960 +387 36 650 950
SARAJEVO_LUK D.O.O. · +387 33 777 888 +387 33 777 889

BRASIL

CURITIBA_PORCEBRAS · +55 (41) 3392 1500 +55 (41) 3392 1400

BULGARIA

BURGAS_ELE CERAMICA · +359 56 842 849
SOFIA_ELE CERAMICA · +359 28 606 060
VARNA_ELE CERAMICA · +359 52 500 555

CAMBOYA

PHNOM PENH_HOME LIVING · 855092434264

CAMERÚN

DOUALA_CONNECTIK HALL SAS · 237233434780

CANADÁ

MONTREAL_PORCELANOSA MONTREAL . P: (+1) 438.221.8705
VAUGHAN_PORCELANOSA EAST CANADA · P: (+1) 9.054.541.053 F: (+1) 905.454.1055
CALGARY_PORCELANOSA CALGARY · (587) 349-2290
TORONTO_PORCELANOSA TORONTO · 9054541053
VANCOUVER_FONTILE DISTRIBUTORS · +604 683 9358 +604 683 6758

PORCELANOSA Showrooms

INTERNACIONAL | **INTERNATIONAL**

INTERNACIONAL | **INTERNATIONAL**

INTERNACIONAL | **INTERNATIONAL**

INTERNACIONAL | **INTERNATIONAL**

INTERNACIONAL | **INTERNATIONAL**

INTERNACIONAL | **INTERNATIONAL**

INTERNACIONAL | **INTERNATIONAL**

CHILE
SANTIAGO_PORCELANOSA CHILE · (56 2) 2 434 92 87

CHINA

BEIJING_GUANGZHOU PO YICK DECORATION DESIGN CO LTD (BEIJING BRANCH) · +86 1085271313 +86 861064229976 CHANGCHUN_CHANGCHUN PORCELANOSA CERAMIC SHOWROOM · +86 43182787172 +86 43182775881 CHONGQING_YAOSENG BUILDING MATERIAL BUSINESS DEPARTMENT NEW NORTH ZONE · +86 23 86358360 +86 23 86357182 DALIAN_DALIAN GREAT WORLD FURNITURE PLAZA LUBAO BLDG. MAT. BUSINESS DEP · +86 41182301911 +86 41182301911 FUZHOU_PO YICK CERAMIC SHOWROOM JINAN DISTRICT FUZHOU · +86 59188055823 +86 59188055823 GUANGZHOU_GUANGZHOU PO YICK DECORATION DESIGN CO LTD · +86 2022008228 +86 2022008228 GUANGZHOU_PO YICK DECORATION DESIGN CO LTD · +86 2087018223 +86 2087018226 HANGZHOU_DA DOU BUILDING MATERIAL BUSINESS · +86 13958149905 HEFEI_AN HUI JIA ZHUO BUILDING MATERIALS CO LTD · +86 55164842686 JIANGYIN_NANJING XINGLANG BUILDING MATERIAL CO LTD · +86 51081693999 +86 51081693999 JIAXING_JIA XING FEI FAN BUILDING MATERIALS CO LTD · +86 57382770662 +86 57382770662 JIN HUA_JIAJIAHONG BUILDING MATERIALS BUSINESS DEPARTMENT JIN DONG DISTRICT JIN HUA CITY NINGBO_NINGBO JING ZHOU NIN DONG TUO BI MATERIAL BUSINESS DEPARTMENT · +86 57487867539 QINGDAO_QINGDAO TOLI SPACE BUILDING MATERIALS CO LTD · +86 532 80995657 +86 532 80995657 SHANGHAI_GUANGZHOU PO YICK DECORATION DESIGN CO LTD (SHANGHAI BRANCH) SHANGHAI_PORCELANOSA SHANGHAI · +86 21 61397952 SHENYANG_SHENYANG PORCELANOSA CERAMIC SHOWROOM · +86 2431223766 +86 2485637137 SHENZHEN_SHENZHEN PORCELANOSA PO YICK BUILDING MATERIALS CO LTD · +86 75582407728 TAIYUAN_TAIYUAN PORCELANOSA CERAMIC SHOWROOM · +86 13701067286 TAIZHOU_TAI ZHOU SHI MING DIAN BUIDLING MATERIALS TRADING COMPANY LTD · +86 57689807883 TANGSHAN_TANG SHAN PORCELANOSA CERAMIC SHOWROOM · +86 3152732085 TIANJIN_TIANJIN OULINHUI BUILDING MATERIALS CO LTD · +86 22 23528765 +86 22 88277023 WUHAN_WUHAN HENG HUI BUILDING MATERIAL CO LTD · +86 2783995277 +86 2783995277 XIAN_PORCELANOSA BUILDING MATERIAL BUSINESS DEPARTMENT ETDZ XIAN · +86 2986122404

CHIPRE

GIRNE_MEPAS LTD · 9039 2815 2964 9039 2815 5651
LARNACA_CYKINGS CERAMICS · +357 9937 2121 +357 2481 8128
LIMASSOL_THE ENGINEERING AND COMMERCIAL ASSOCIATION (EKA) · +357 25854444 +357 25854545
NICOSIA_CH & P MAOURIS COMPANY LIMITED · +357 22444555 +357 22877835

COLOMBIA

BOGOTÁ_PORCELANOSA BOGOTÁ · +57 743 0209
MEDELLÍN_PORCELANOSA MEDELLÍN · +57(4) 322 5297

COREA DEL SUR

BUSAN_COTTO CERAMIC CO LTD · 82512080022 82512088558 SEO-GU_COTTO CERAMIC CO LTD · SEOUL_BARRO CERAMIC · 822334438600 822334438822

COSTA DE MARFIL

ABIDJAN_FADCO COMPANY · +225 21757355 +225 21757358

COSTA RICA

SAN JOSÉ_FERNANDEZ AGUILAR S.A. · +506 222 5674 +506 221 9952

CROACIA

ZAGREB_ABC INTERIJER · +385 16 393 164 +385 16 055 985 ZAGREB_SPINA · +385 13 492 552

DINAMARCA

GLOSTRUP_MOSAIKHJORNET · +45 43 633 900 +45 43 663 857
ODENSE_M_DANESP FLISE KOMPAGNIET APS · +45 661 732 21 +45 661 738 21
AARHUS_DOKK16 A/S · +45 31 12 00 99

ECUADOR

CUENCA_GRIFINE HOME CENTER S.A · (593) 07 281-8089
GUAYAQUIL_GRIFINE HOME CENTER S.A · (593)4 370-2830
QUITO_GRIFINE HOME CENTER S.A · (593) 2 393-1920

EE.UU.

801 E EXPY 83_GILSA NORTH AMERICA · +1 956 223 2900
ANAHEIM_PORCELANOSA ANAHEIM · P: (+1) 714.772.3183 F: (+1) 714.772.9851
ATLANTA_PORCELANOSA ATLANTA · P: (+1) 404.973.0640 F: (+1) 404.973.0303
AUSTIN_PORCELANOSA AUSTIN · P: (+1) 214.931.9610
BOSTON_PORCELANOSA BOSTON - BOSTON DESIGN CENTER · P: (+1) 617.963.7666 F: (+1) 617.963.7675
BROOKLYN_PORCELANOSA BROOKLYN · P: (+1) 929.239.3260
CHESNUT HILL_PORCELANOSA CHESNUT HILL · P: (+1) 617.963.7666 F: (+1) 617.608.0175
CHICAGO_PORCELANOSA CHICAGO · P: (+1) 312.204.6220 F: (+1) 312.204.6240
CHICAGO_PORCELANOSA CHICAGO LINCOLN PARK · P: (+1) 872.245.0120
DALLAS_PORCELANOSA DALLAS EMERALD STREET · P: (+1) 469.310.2870
DALLAS_PORCELANOSA DALLAS HI LINE DRIVE · P: (+1) 214.377.2327 F: (+1) 214.234.1340
DENVER_PORCELANOSA DENVER · P: (+1) 303.802.3210 F: (+1) 303.802.3221
EAST BRUNSWICK_PORCELANOSA EAST BRUNSWICK · P: (+1) 732.613.1915 F: (+1) 732.613.9181
GLENDALE_GLENDALE TILE · P: (+1) 818.500.8505 F: (+1) 818.500.7130
HERMOSA BEACH_AMIRIAN HOME · P: (+1) 424.390.4460 F: (+1) 424.390.4461
HOUSTON_PORCELANOSA HOUSTON · P: (+1) 281.605.2770 F: (+1) 281.605.2695
KING OF PRUSSIA_PORCELANOSA KING OF PRUSSIA · P: (+1) 484.751.0050 F: (+1) 484.751.0047
MIAMI_PORCELANOSA MIAMI · P: (+1) 305.715.7153 F: (+1) 305.592.6999
MIAMI_PORCELANOSA MIAMI DESIGN DISTRICT · P: (+1) 786.329.6753 F: (+1) 786.329.6760
NEW YORK CITY_PORCELANOSA MANHATTAN FLAGSHIP STORE · P: (+1) 646.751.1180
NORTH BETHESDA_PORCELANOSA MARYLAND NORTH BETHESDA · P: (+1) 240.290.1120
ROCKVILLE_PORCELANOSA MARYLAND ROCKVILLE · P: (+1) 301.294.8193 F: (+1) 301.294.8194
PARAMUS_PORCELANOSA PARAMUS · P: (+1) 201.712.0556 F: (+1) 201.712.0744
POMPAÑO BEACH_PORCELANOSA POMPAÑO BEACH · P: (+1) 954.968.7666 F: (+1) 954.968.7699
RAMSEY_PORCELANOSA

PORCELANOSA Showrooms

INTERNACIONAL | INTERNATIONAL

FRANCIA
SAINT-ETIENNE_PORCELANOSA ASSOCIATE · 04 77 30 56 76
SAINT-QUAY-PERROS - CARRELAGES & STYLES · +33 (0)296136800
SAINT-PAUL-LÈS-DAX - CAREL · +33 (0)558919947
SAINT-PÉRAY_PORCELANOSA ASSOCIATE· +33 (0)4 75 60 53 51 +33 04 75 80 22 40
VARENNES LÈS MÂCON_HENRI DE ALMEIDA CREATIONS · +33 03 85 36 33 15 +33 03 85 30 53 64
VEDÈNE_PORCELANOSA AVIGNON · 04 90 02 64 02
ANNECY_PORCELANOSA ANNECY · +33(0)4 38 80 09 90
ARCUEIL_PORCELANOSA PORTE D'ORLÉANS · +33 (0)149 121 257 +33 (0)149 121 258
AUBAGNE_PORCELANOSA MARSEILLE · +33 (0)442 624 330 +33 (0)442 624 339
BEAUCOUZÉ_PORCELANOSA ANGERS · +33 (0)241 738 100 +33 (0)241 733 721
BESANÇON_PORCELANOSA BESANÇON · +33 (0)381 416 363 +33 (0)381 416 369
BREST_PORCELANOSA BREST · +33 (0)298 025 100 +33 (0)298 415 401
CHAMBRAY LES TOURS_PORCELANOSA TOURS · +33 (0)247 808 787 +33 (0)247 808 789
CHAMPAGNE-AU-MONT-D'OR_PORCELANOSA LYON · +33 (0)478 668 151 +33 (0)478 432 003
CHASSENEUIL DU POITOU_PORCELANOSA POITIERS · +33 (0)549 119 787 +33 (0)549 119 788
CHENÔVE_PORCELANOSA DIJON · +33 (0)380 588 701 +33 (0)380 588 595
COIGNIÈRES_PORCELANOSA COIGNIÈRES · +33 (0)130 491280 +33 (0)130 491328
GUÉRANDÉ_PORCELANOSA LA BAULE · +33 (0)240 607 273 +33 (0)240 110 659
LA CHAPELLE SAINT AUBIN_PORCELANOSA LE MANS · +33 (0)243 236 520 +33 (0)243 240 512
LA ROCHE SUR YON_PORCELANOSA LA ROCHE-SUR-YON · +33 (0)251 241 217 +33 (0)251 242 399
LEZENNES_PORCELANOSA LILLE · +33 (0)320 340 340 +33 (0)320 340 341
LORIENT_PORCELANOSA LORIENT · +33 (0)297 875 000 +33 (0)297 370 607
LYON – PORCELANOSA LYON CENTRE +33(0)4 37 42 05 00
MANDELIEU LA NAPOULE_PORCELANOSA CANNES · +33 (0)493 477 360 +33 (0)493 477 402
MEAUX_PORCELANOSA MEAUX · +33 (0)160 092828 +33 (0)160 093131
MERIGNAC_PORCELANOSA BORDEAUX · +33 (0)556 124 848 +33 (0)556 124 849
MONDEVILLE_PORCELANOSA CAEN · +33 (0)231 820 000 +33 (0)231 820 019
MONTIGNY-LÈS-CORMEILLES_PORCELANOSA MONTIGNY · +33 (0)1 39 31 19 79 +33 (0)1 39 31 14 92
NÎMES_PORCELANOSA NÎMES · +33 (0)466 282 780 +33 (0)466 282 781
ORVAULT_PORCELANOSA NANTES · +33 (0)228 073 950 +33 (0)228 073 957
PARIS_PORCELANOSA PARIS 7ÈME · 01 42 84 84 00 01 42 84 84 01
PÉROLS_PORCELANOSA MONTPELLIER · +33 (0)467 503 600 +33 (0)467 501 121
SAINT GRÉGOIRE - RENNES_PORCELANOSA RENNES · +33 (0)223 200 808 +33 (0)299 369 688
TOULOUSE_PORCELANOSA TOULOUSE · 05 34 56 57 60 05 34 56 57 86
TOURVILLE LA RIVIÈRE_PORCELANOSA ROUEN · +33 (0)235 650 655 +33 (0)235 650 656
VANNES_PORCELANOSA VANNES · +33 (0)297 460 292 +33 (0)297 461 210
VENDENHEIM_PORCELANOSA STRASBOURG · +33 03 88 20 82 90 +33 (0)388 209 107
VERT SAINT DENIS_PORCELANOSA MELUN · +33 (0)160 565 747 +33 (0)160 569 080
CHAMPAGNE-AU-MONT-D'OR_DÉPÔT LYON · 04 78 66 81 56
SAINT HERBLAIN DÉPÔT SAINT-HERBLAIN · +33 2 40 16 94 00 +33 2 40 16 94 14
TIGERY DÉPÔT PARIS IDF · 01 69 90 49 00

GEORGIA
TBILISI_LUXOR SHOP · +995 32 2388898 +995 32 2388399

GHANA
ACCRA_CASA TRASACCO · +233 30 282 3322

GRECIA
ATTICA_SUERO · +30 2105 594 520 +30 2105 594 521
GLIFADA_HATZ GROUP · +30 2310 752 902 +30 2310 753 564
THESSALONIKI_PORCELANA · 2310 700 861 2310 700 861
THESSALONIKI_PORCELANA · 2310 753 003 2310 753 003
THESSALONIKI_PORCELANA · 2310 474 767 2310 474 403

GUADALUPE
BAIE MAHAULT_GUADELOUPE CERAMIQUE · +590 266 261 +590 266 412
SAINT BARTHELEMY_ALMA QUINCAILLERIE · +590 276 494 +590 276 738

GUATEMALA
CIUDAD DE GUATEMALA_FERRETERÍA DE LA CONSTRUCCIÓN FERCO · (+502) 2421 9000 (+502) 2421 9009

HAITI
PORT AU PRINCE_EUROCERAM · 0 999 999 984

HONG KONG
KOWLOON_TAI YICK BUILDING MATERIALS · +852 23 956 670 +852 23 957 831

HUNGRÍA
BÉKÉSCSABA_PALATINUS FURDOSZOBASZALONOK · +36 66 328 432 +36 66 328 432
BUDAPEST_AXOR HOME KFT · +36 1 2370878 +36 1 2370879
BUDAPEST_MIRAGE 86 ZRT · +36 1 793 9532 +36 1 799 6289
BUDAPEST_PALATINUS FURDOSZOBASZALONOK · +36 1 430 04 17 +36 1 387 91 36
DREBÉCEN_PALATINUS FURDOSZOBASZALONOK · +36 3 031 94 353 +36 52 536 822
EGER_PALATINUS FÜRDŐSZOBASZALON EGER · +36 3681 4319 +36 3631 0575
EGER_PALATINUS FURDOSZOBASZALONOK · +36 0636 312 013 +36 0636 313 270
ÉRD M7-ES FELJÁRÓ_VS FÜRDŐSZOBA ÉRD · +36 304 831 154
GYÖNGYÖS_PALATINUS FURDOSZOBASZALONOK · +36 37 500 162 +36 37 500 163
KECSKEMÉT_PALATINUS FÜRDŐSZOBASZALON KECSKEMÉT · +367607918
MAGYAR_VS RBC - RAVAK BUSINESS CENTER · +36 304831154
MISKOLC_PALATINUS FURDOSZOBASZALONOK · +36 46 412 741 +36 46 416 256
NYÍREGYHÁZA_KOVÁCS TÜZÉP CT · VIDA ERZSÉBETCCC · +36 42 598 073
TARJÁN_STRAUBINGER ÉPÍTÉSI VÁLLALKOZÓ KFT · +36 303 483 773

INDIA
NEW DELHI_MARMO HOME PVT. LTD. · +91 11 47128800 +91 11 23218728

INDONESIA
BANDUNG_WISMA SEHATI (BANDUNG) · +62 22 723 8515 +62 22 723 8516
JAKARTA_WISMA SEHATI (BSD) · +62 21 537 7278 +62 21 537 7880
JAKARTA_WISMA SEHATI (MANGGA DUA) · +62 21 6013303 +62 21 6251221
JAKARTA_WISMA SEHATI (POLIM) · +62 21 72787711
SEMARANG_WISMA SEHATI (SEMARANG) · +62 24 356 2233 +62 24 356 2222
SURABAYA_WISMA SEHATI · +62 31 5631999

IRÁN

TEHRAN_FARBAR COMPANY · +982188036364

IRAQ
BAGHDAD_BAGHDAD TIME COMPANY LTD · +964 771 111 1594 +964 771 186 2730
ERBIL_AKSESUAR INSAAT ERBIL · +964 750 835 0055 +964 66 210 1900

IRLANDA
CORK_O.B. HEATING, PLUMBING, BATHROOMS & TILES · +353 0 214 310 000 +353 0 214 310 003
DUBLIN_TILESTYLE LTD · +00 353 1 8555200 +00 353 1 8557471
RATHNEW_MILLER BROS STONE DEVELOPMENT · +353 0404 32222

ISLANDIA
REYKJAVIK_ALFABORG EHF · +354 568 6755 +354 568 1277

ISLAS CAIMÁN
CAIMAN_STAFFORD FLOORING · +1 345-943-2722

ISRAEL
BNEY BRAK_HEZI BANK · +972 3 616 6641 +972 4 904 6643
HAIFA_TOPOLSKI & CO LTD · +972 4 904 0496 +972 4 904 0455
JERUSALEM_BAR-AMI 1990 LTD · +972 2 531 3444 +972 2 538 3740
KANOT_POLINOY · +972 5 277 73437
RAANANA_AMOZI NAGAR IMPMARK.OGEN LTD · +972 9 760 1501 +972 9 741 1997
RISHON LE ZION_NEGEV CERAMICS · +972 3 9436830 +972 3 9436810
ROSH HAIIN_BACERAMIC DESIGN · +972 3 603 0111 +972 3 907 1992
UPPER GALILY_KAMARIKA · +972 4 680 1010 +972 4 680 0318

ITALIA
ANDRIA_MIDIL-CERAMICHE S.A.S. · +39 08 835 66466 +39 08 835 49260
BELLUNO_PORCELANOSA BELLUNO · +39 32 890 78586 +39 04 379 25482
BERGAMO_PORCELANOSA BERGAMO · +39 03 529 9984 +39 03 529 22085
CORSICO_PORCELANOSA LOMBARDIA · +39 02 458 64310 +39 02 458 64415
ELMAS_PORCELANOSA CAGLIARI · +39 70 211 0009 +39 70 212 8144
MILANO_SPAZIO LIBIA 3 · +39 02 872 46767
MONTESILVANO_PORCELANOSA PESCARA · +39 08 544 93241 +39 08 544 56002
ROMA_PORCELANOSA ROMA · +39 06 888 9977 +39 06 888 7056
SASSUOLO_PORCELANOSA SPA · +39 05 368 06677 +39 05 368 02184
TREVISO_PORCELANOSA TREVISO · +39 04 226 97087 +39 04 223 01767

JAMAICA
KINGSTON_TILE CITY & HOME CENTRE · +1 876 925 8453

JAPÓN
TOKYO_YOSHIMOTO TRADING CO. LTD · +072 334341700

JERSEY
ST. SAVIOUR_PASTELLA GROUP · 01534 870167 01534 723199

JORDANIA
AMMAN_AYMAN ABDALLAT & PARTNERS CO. · 9002 956197 5504523

KAZAJISTÁN
ALAMTY_ALTAIR · +7 (727) 393 56 17
ALAMTY_DOMINA · +7 (727) 275 50 36
ALMATY_PALATIN · +7 (727) 395 78 78 +7 (727) 351 98 98
ALMATY_PALATIN · +7 (727) 351 98 98
ASTANA_ALTAIR · +7 (7172) 92 82 82
ASTANA_DOMINA · +7 (7172) 76 97 61
ASTANA_PALATIN · +7 (7172) 92 82 82
ASTANA_PORCELANOSA ASTANA · +7 (7172) 28 83 37

KENIA
NAIROBI_LIFESTYLE INTERIORS LTD · 254713380549

KOSOVO
PRISHTINË_N P KERASAN · +381 38 602 667 +381 38 602 667

KUWAIT
SAFAT_HASSAN ABUL HASSAN SADIQ · +965 262 4466 +965 265 1444

LETONIA
RIGA_TORMANIS UN PARTNERI · +371 784 5361 +371 784 5360

LÍBANO
BEIRUT_GEAHCHAN GROUP · +961 1 480520 +961 1 496607
BEIRUT_PORCELANOSA GROUP BEIRUT · +961 1881 170

LIBIA
BENGHAZI_EL RAGUOBI · 218 61 4704533 218 61 2237328
BERKA BENHAZI_MANART AL ANDALOS EST · 21861229605 218612237328
TRIPOLI_EL RAGUOBI · 218 91 3274885

LITUANIA
VILNIUS_INTERJO SALA - JSC VENDE · 370 6 8711071
VILNIUS_OGRINDA UAB · 370 5 2607854
VILNIUS_OGRINDA UAB · 370 5 2715519

MACEDONIA
SKOPJE_TE LINDI DOO · +389 2 2 602 628 +389 2 2 602 638
SKOPJE_PORCELANO-AMBIENT DOOEL · +389 70387776

PORCELANOSA Showrooms

INTERNACIONAL | INTERNATIONAL

MALASIA
ALOR SETAR_APEX BOUTIQUE - SELANGOR · + 603 7875 7833
KOLOMBONG,KOTA KINABALLU_APEX BOUTIQUE – KOTA KINABALLU · +6088 388 150 +6088 389 150
KUALA LUMPUR_APEX BOUTIQUE - KUALA LUMPUR · +603 4043 8333 +603 4044 3338
PENANG_APEX BOUTIQUE – PENANG · +604 659 3322 +604 659 3339
PETALING JAYA_APEX BOUTIQUE - SELANGOR · +603 7875 7833 +603 7876 7833
PETALING JAYA_PORCELANOSA KUALA LUMPUR · +603 7865 8817 +603 7865 7730
SEBERANG PRAI TENGAH_APEX BOUTIQUE - BUTTERWORTH · +604 3988 333 +604 3988 987

MALTA
BIRKIRKARA_ROGER SATARIANO & SONS LTD · +356 21 442 769 +356 21 497 017

MARRUECOS
CASABLANCA_CERAMEX · +212 945 3646166 +212 5223 395363
CASABLANCA_SANITAIRES 2000 · +212 22 363 225 +212 22 394 100
TANGER_FACENOR S.A. · +212 39 941 910 +212 39 945 445

MARTINICA
LAMENTIN_JOSEPH COTTRELL S.A. · +596 509 810 +596 506 524

MÉXICO
CANCÚN_PORCELANOSA CANCÚN · (998) 313 2343 (55) 58317340 EXT. 107
CIUDAD DE MÉXICO - ALTAVISTA_PORCELANOSA MÉXICO - ALTAVISTA · (55) 5550 7060 (55) 5550 7060
CIUDAD DE MÉXICO - INTERLOMAS_PORCELANOSA MÉXICO - INTERLOMAS · +(55) 3605 0064
CIUDAD DE MÉXICO - MASARYK_PORCELANOSA MÉXICO - MASARYK · (55) 528220 00 (55) 5282 2737
CIUDAD DE MÉXICO - VALLE DORADO_PORCELANOSA MÉXICO - VALLE DORADO · (55) 5831 7340
GUADALAJARA_PORCELANOSA GUADALAJARA · (33) 3615 3255
PLAYA DEL CARMEN_PORCELANOSA PLAYA DEL CARMEN · (984) 873 1090 (55) 58317340 EXT. 107

MÓNACO
MONACO_PORCELANOSA MONACO · +377 93 50 23 87

MONGOLIA
ULAAANBAATAR_ZUUNNAIMAN SUVRAGA COLTD · +976 (11) 3414 217

MONTENEGRO
PODGORICA_ENTEXT · 38220260833

MYANMAR
YANGON_PORCELANOSA ASSOCIATE MYANMAR · (+95) 9956988932

NEPAL
KATMANDU_RUKMANI INTERNATIONAL PVT LTD · 97714420281 97714428295

NICARAGUA
MANAGUA_DECOCENTER - GRUPO IBERICA NICARAGUA · +505 270 2121 +505 277 0834

NIGERIA
VICTORIA ISLAND_LAGOS_PORCELANOSA LAGOS · +234 8090371913

NORUEGA
ÅLESUND_FAGFLIS ÅLESUND · +47 70 10 22 64
BODØ_FAGFLIS BODØ · +47 75 52 25 57
BÆRUM_FAGFLIS BÆRUM · +47 67 10 34 90
BERGEN_FAGFLIS BERGEN · +47 55 11 77 40
DRØBAK_FAGFLIS DRØBAK · +47 64 93 96 76
ELVERUM_FAGFLIS ELVERUM · +47 62 41 67 60
FREDRIKSTAD_FAGFLIS FREDRIKSTAD · +47 69 31 70 00
GJØVIK_FAGFLIS GJØVIK · +47 61 18 80 86
GURSKØY_FAGFLIS SØRE SUNNMØRE · +47 70 10 22 77
HAMAR_FAGFLIS HAMAR · +47 62 59 70 00
KLØFTA_FAGFLIS KLØFTA · +47 63 98 29 20
KRISTIANSUND_N_FAGFLIS KRISTIANSUND · +47 70 10 22 76
LARVIK_FAGFLIS LARVIK · +47969 15 027
LIERSKOGEN_FAGFLIS LIERTOPPEN · +47 31 00 02 80
MOLDE_FAGFLIS MOLDE · +47 70 10 22 74
MOSS_FAGFLIS MOSS · +47 69 24 15 70
NARVIK - ANKENESSTRAND_FAGFLIS NARVIK · +47 76 95 04 90
NESTTTUN_FAGFLIS BERGEN · +47 55 11 77 40 +47 55 11 77 49
OPPDAL_FAGFLIS OPPDAL · +47 72 42 23 50
OSLO_FAGFLIS ARKITEKTSHOWROOM · +47 22 80 85 60
OSLO_FAGFLIS OSLO · +47 22 80 18 00 +47 22 80 18 01
SANDEFJORD_FAGFLIS SANDEFJORD · +47 47 24 62 00
SANDNES_FAGFLIS SANDNES · +47 51 63 15 36
SKIEN_FAGFLIS GRENLAND · +47 35 58 70 00
TØNSBERG_FAGFLIS TØNSBERG · +47 33 35 81 60

NEUEA ZELANDA
CHRISTCHURCH_NEXT DORE · 03 366 9400 03 365 4406

PAÍSES BAJOS
AMSTERDAM_PORCELANOSA ARCHITECTEN SHOWROOM, PGN CERAMICA B.V. · 0031 20 7372845

PAKISTÁN
LAHORE_4 WALLS (PRIVATE) LIMITED · +92 42 111 492 557

PALESTINA
BETHLEHEM (WEST BANK)_AL-KHAYAL (BAYTOUNA) · +972 2 277 7279 +972 2 274 4026

PANAMÁ
OBARRIO, CIUDAD DE PANAMÁ_EUROCER S.A. · +507 21 53660

PARAGUAY
ASUNCIÓN_IPALE ALTA GAMA · +595 21 613 544

PERÚ
LIMA_CASSINELLI · +51 14 513 712 +51 15 612 757
SAN ISIDRO_PORCELANOSA GRUPO PERÚ · +51 1441 41 06

POLONIA
BIALYSTOK_AKCESS · +48 85 6643436 +48 85 6643434
BIELSKO-BIALA - ADARI - 338220449
BYDGOSZCZ_SALON MO (BYDGOSZCZ) · +48 52 348 9343 +48 52 348 9354
CZESTOCHOWA_P.H.U. FUGA · +48 34 368 2944 +48 343682944
GLIWICE_ART CERAMIKA · +48 32 339 8200 +48 32 339 8209
GORZÓW WLKP_SALON MO (STUDIO DEKOR) · +48 95 721 4108 +48 95 721 41
GLIWICE - ADARI - 322322155
GORZOW - STEMAR - 0957 204 555
KALISZ_SALON MO (SPECTROOM) · +48 62 502 10 15
KATOWICE - ADARI - 322589574
KATOWICE_MAX FLIZ · +48 32 720 92 00 +48 32 720 92 00
KRAKOW - MAX FLIZ - 0122 907 12
KIELCE_EXCLUSIVE · +48 41 345 75 49
KOŁOBRZEG_SALON MO (KOŁOBRZEG) · +48 94 355 18 88 +48 94 355 18 80
KONIN_SALON MO (KONIN) · +48 63 243 31 14
KRAKÓW_MAX FLIZ · +48 01 229 07060 +48 01 229 07060
LESZNO_SALON MO (LESZNO) · +48 65 529 63 63
LODZ_FUMINO · +48 42 637 37 67
LODZ - GRES - 48 42 636-20-38 / 48 601-355-419
ŁÓDŹ_CERMAG SP ZOO · +48 77 457 35 09/10 +48 77 474 88 82
LUBLIN_SALONIKA · +48 81 740 99 30
LUBLIN - ANDBUD - 081 469 9617
OPOLE_CERMAG SP ZOO (OPOLE) · +48 42 616 55 44 +48 42 611 61 61
OSTRÓW WLKP_SALON MO (OSTRÓW WLKP) · +48 62 735 81 12 +48 62 737 28 91
POZNAN_SALON MO (POZNAN) · +48 61 835 97 50 54
POZNAN - STEMAR POZNAN - 616425802
RABKA - CERAMPOL - 48185065600
RZESZÓW_F.H. BOZ S.A. · +48 17 850 0315 +48 17 850 0341
RZESZÓW_CERMAG STREFA ARCHITEKTA (RZESZOW)
RZESZÓW - ANDBUD - 017 785 1020
TYCHY - ADARI - 0322 322 155
ŚLUPSK_ŚLUPSK - GRESMAX · +48 59 843 4153 +48 59 843 4153
SOPOT_SALON MO (SOPOT) · +48 58 550 4235
SZCZECIN_CERMAG STREFA ARCHITEKTA (SZCZECIN) · +48 91 434 00 48 +48 91 434 07 35
VARSOVIA_INTERNITYTY · +48 22 639 84 94
WARSAWZA - GALERIA VENIS - 0226 730 371
WROCLAW_CERMAG SP ZOO (WROCLAW) · +48 717 820 021 +48 717 820 031

PUERTO RICO
GUAYNABO_THE TILE SHOP · +1 787 720 2030 +1 787 790 2030
SAN JUAN_THE TILE SHOP · +1 787 775 2030 +1 787 707 0138

QATAR
QATAR_UNITED SUPPLIES · +974 46 85 164 +974 46 85 165

REINO UNIDO
11-17 NUFFIELD TRADE ESTATE_BATHROOM ELEGANCE · 01202 675 992 01202 675999
BALLYCASTLE_BALLYCASTLE HOMECARE · 028 2076 3302 028 2076 2418
BALLYMENA_J & R KEYS · 028 2564 2971
BEDFORD_MARABESE CERAMICS - BEDFORD · 01234 324594 01234 266446
BELFAST_BEGGS & PARTNERS · 028 9023 5791 028 9023 3273
BRIDGE ROAD_CERAMIC TILE WAREHOUSE · 01276 678 845
BRISTOL_PORCELANOSA WESTERN · 0117 959 71 51 0117 959 71 55
CANNOCK_PORCELANOSA MIDLANDS · 01543 223025 01543 462959
CARDIFF_PORCELANOSA WESTERN · 0292 0465 166 0292 0465 156
CROYDON_PORCELANOSA SOUTH EAST · 02086 670 994 08444 818 963
CUMBRIA_ALEXANDER & SANCTO · 01539 725255 1792700900
DONCASTER_PORCELANOSA YORKSHIRE · 01302 30 47 13 01302 30 47 15
DORCHESTER_BATHROOM INSPIRATIONS · 01305259966 01305259994
EDINBURGH_PORCELANOSA SCOTLAND · 0131 335 38 83 0131 335 38 84
EWELL_INTER TILES & INTERIORS · 0208 3942928
EXETER_PORCELANOSA WESTERN · 01392 215 552 01392 215 557
FULHAM_PORCELANOSA SOUTH EAST · 0207 751 2150 08444 818 962
GLASGOW_PORCELANOSA SCOTLAND · 0141 533 1000 0141 533 1007
HEMEL HEMPSTEAD_EBBERNS · 01442 253878 01442 768481
IPSWICH_FOXWOOD CERAMICS · 01473 622 310 01473 717639
KESTREL WAY_SURREY TILES · 01483 725 007 01483 720 889
LEEDS_PORCELANOSA YORKSHIRE · 01132 20 60 90
LETCHWORTH GARDEN CITY_MARABESE CERAMICS - LETCHWORTH · 01462 480716
LONDON_PORCELANOSA SOUTH EAST - DESIGN CENTRE · 0207 253 1227 08444 818 969
LONDON ROAD_CAMBRIDGESHIRE BATHROOMS · 01223 837939 01223 835481

PORCELANOSA Showrooms

INTERNACIONAL | INTERNATIONAL

REPÚBLICA CHECA

BRNO_DESIGN BATH SE · +420 547 216 621
LIBEREC_DORINT GROUP, A.S. · +420 602457510
PRAHA_DESIGN BATH SE · +420 222 984 951
PRAHA_DORINT PHA S.R.O. · +420 271 745 269

REPÚBLICA DEMOCRÁTICA DEL CONGO

KINSHASA_SOCIETE PANACHE · +243 884 1677 +243 983 13893

REPÚBLICA DOMINICANA

BÁVARO_CARABELA S.R.L. · +1 809 466 0020 +1 809 466 2006
LA ROMANA_CARABELA S.R.L. · +1 809 556 3606 / 809 550 9006 +1 809 221 7416
SANTIAGO_CARABELA S.R.L. PORCELANOSA · +1 809 971 1234 +1 809 971 6728
SANTO DOMINGO_CARABELA S.R.L. · +1 809 544 2560 +1 809 541 0818

REUNIÓN

SAINT DENIS_RAVATE PROFESSIONNEL SAS · +262 904 024 +262 904 057

RUMANÍA

BRASOV_DELTA STUDIO BRASOV · +40 (723) 101.430
BUCAREST_GLAMOUR · 40311000586
BUCAREST_GLAMOUR · 0040 31 229 3210
BUCAREST_DELTA STUDIO SRL · 0374 659 007
CLUJ-NAPOCA_STUDIO CLUJ-NAPOCA 0364880060
CONSTANTA_DELTA STUDIO CONSTANTA · 0722 240 736
CRAIOVA_SC MYDWAY IMPEX SRL · +40 722 285 029 +40 251 427 946
IASI_DELTA STUDIO IASI · 0730 586 938
ORADEA_MAIISON DESIGN · +40 743 507 811 +40 259 410 170
PITESTI_DELTA STUDIO PITESTI · 0723 363 823
PLOIESTI_DELTA STUDIO PLOIESTI · 0723 541 737
SIBIU_DELUXE STUDIO · +40 743 213 263
TIMISOARA_DELTA STUDIO TIMISOARA · 0374659015

SENEGAL

DAKAR_C.C.S. · +221 33 849 04 04 +221 33 823 13 10

SERBIA

BELGRADO_HOME CONCEPT · +381 11 6558 960
BELGRADO_PORCELANOSA HOME CONCEPT · +381 11 6557 087

SINGAPUR

SINGAPUR_FERNANDO MARTIN BENITO · +65 97801472 +65 64621620

SRI LANKA

COLOMBO 13_RANJANAS CERAMIC · +94 11 2543255 +94 11 2381386

SUDÁFRICA

CAPE TOWN_CLASSIC TRADING · 021 465 9277 021 462 0973
DURBAN_CLASSIC TRADING · +27 31 579 1900 +27 31 577 7056
JOHANNESBURG_CLASSIC TRADING · +27 11 656 0400 +27 11 656 0403

SUECIA

BROMMA_KAKELPALATZET I BROMA AB · +46 (0)8 56 487 831
GÖTEBORG_KAKELPALATZET I BÄCKEBOL AB · +46 (0)31 571 478
KATRINEHOLM_KAKELPALATZET I KATRINEHOLM AB · +46 (0)8150-51 740
MÖLNDAL - KAKELPALATZET I MÖLNDAL HEADQUARTERS · +46 (0)31 776 50 51

SUIZA

AUBONNE_ARGECOM SA · +41(0)21 807 10 10 +41(0)21 808 61 02
ARBON_HAMA KERAMIKDESIGN · +41 71 446 61 66 +41 71 446 61 65
BIEL_SABAG SA · +41 32 328 28 28 +41 32 328 28 80
CRISSIER_SABAG SA · +41 21 633 06 84 +41 21 633 06 85
GENEVE_SABAG SA · +41 22 908 06 90 +41 22 908 06 95
LUGANO-GRANCIA_PL VALLI SA · +41 919 859 510
MENDRISIO_NEW FORM SWISS SAGL · +41 919 227 356
ROTHENBURG_SABAG SA · +41 41 289 72 72 +41 41 289 72 73
SEVELEN_KAISER AG BAD & PLÄTTLI · +41 81 785 2242 +41 81 785 2204
SUIZA_1219 MAGENTA HOME DESIGN · +41 848 308 308
VOLKETSWIL_MPV HANDELS AG · +41 (0)43 399 53 00 +41 (0)43 399 53 20
YVERDON-LES-BAINS_SABAG SA · +41 24 423 44 30 +41 24 423 44 45
YVERDON LES BAINS_SABAG YVERDONS · +41 24 423 4444

SURINAM

PARAMARIBO_JAP HOUSING · +597 817-0064

TAILANDIA

BANGKOK_BOONTHAVORN CERAMIC (RATCHADAPISEK) · +66 2275-0029 +66 2275-2057
BANGKOK_BOONTHAVORN CERAMIC CO. LTD. (PIN-KLAO) · +66 2441-3075 +66 2441-4049
BANGKOK_BOONTHAVORN CERAMIC CO. LTD. (KASET NAVAMIN) · +66 2791-2777 +66 2943-9058
BANGKOK_BOONTHAVORN CERAMIC CO. LTD. (SUVARNNABHUMI) · +66 2316-0429 +66 2750 0682
BANGKOK_BOONTHAVORN CERAMIC CO. LTD. (PATTAYA) · +66 38 052 222 +66 38 052 221
CHIANGMAI_BOONTHAVORN CERAMIC CO. LTD. (CHIANGMAI) · +66 5310-5099 +66 5310-5107
MUEANG SURAT THANI DISTRICT_BOONTHAVORN CERAMIC - SURAT THANI · +66 77 237 000
PATHUMTHANEE_BOONTHAVORN CERAMIC CO. LTD. (RANGSIT) · +66 2902-0171 +66 2902-0184
PRACHUABKIRIKUN_BOONTHAVORN CERAMIC CO. LTD. (HUAHIN) · +66 3252 2555 +66 5488-4144
+66 3252-0141 SAMUTSAKHON_BOONTHAVORN CERAMIC - SAMUTSAKHON · +66 2 896 44712 +66 2 896 4473
UDON THANI_BOONTHAVORN CERAMIC - UDON THANI · +66 42 215 678

TAIWAN

KAOHSIUNG_NEW CENTURY CONSTRUCTIONAL · +886 7 384 8834
TAICHUNG_NEW CENTURY CONSTRUCTIONAL · +886 4 2372 8166
TAINAN_NEW CENTURY CONSTRUCTIONAL · +886 6 2613290
TAIPEI_NEW CENTURY CONSTRUCTIONAL · +886 2 33933123

TANZANIA

DAR ES SALAAM_ABC EMPORIO TANZANIA · +255 719885566

TÚNEZ

GABES_ABC ABDENNADHER · 75 29 49 10 74 24 48 85
HAMMAM SOUSSE_ABC ABDENNADHER · 73 32 44 24 73 32 44 25
HAMMAMET_ABC ABDENNADHER · 72 26 04 77 72 26 04 77
MENZEL HAYET_ABC ABDENNADHER · 73 41 04 16 73 41 04 01
SFAX_ABC ABDENNADHER · 74 46 80 72 74 24 48 85
SOUSSE_ABC ABDENNADHER · 73 37 14 76 73 37 14 75
TUNIS_ABC ABDENNADHER · 71 72 58 80 71 72 57 77 71 76 00 46
TUNIS_LIFE STYLE · +216 71 861 551 +216 71 861 549
TUNIS CEDEX_ABDENNADHER BRICOLAGE CENTER · +216 71 725 194 +216 71 760 046

TURQUÍA

ISTAMBUL_YÜTAS · +90 2 1227 44720 +90 2 1227 20874

UCRANIA

DNIPROPETROVSK_EUROPA DNIPRO · (0562) 31 27 53
KHARKIV_EUROPA · +380 577 714 509
KHMELNYTSKYI_SOPRANO · +380 673 543 447
KYIV_SALON MILLENNIUM CONCEPT · (044) 279 60 60
LVIV_KERAMA MARKET · +380 322 972 500
LVIV_SALON KARMEN · +380 32 244 40 55 +380 32 252 70 94
MYKOLAIV_YALOT · +380 512 500 284
POLTAVA_DOGODA · +380 532 687 575
TERNOPII_VERO · 098 67 67 112
VINNYTSIA_LANA · +380 432 507 838

UGANDA

KAMPALA_ABC STILES & BATHZ · +256 776022333

URUGUAY

MONTEVIDEO_ACHER · +598 2 487 5630
PUNTA DEL ESTE_ACHER · +598 4 224 8343 +598 42 250869

UZBEKISTÁN

TASHKENT_PREMIUM CONCEPT · +998 71 256 29 05
TASHKENT_PORCELANOSA TASHKENT · +998 97 753 00 65

VIETNAM

HANOI_MILAN ARCHITECTURAL · 0913212568 0986110133
HANOI_MILAN ARCHITECTURAL · +84 8 5412 1819 +84 8 5412 1820
HANOI_MILAN HOME CENTER · 977800785 +84 4 3234 5028
HANOI_MILAN HOME CENTER DISTRIBUIDOR MR VU THAI · +84 9 1321 2568 +84 4 3234 5028
HO CHI MINH CITY_CASABELLA CO LTD · +84 9 1323 7771

YEMEN

SANAA_AL-YAMAMAH GROUP/ABO JALAL TAHER CORPORATION FOR GENERAL TRADE · +967 1 470 375 +967 1 405 665

YIBUTI

DJIBOUTI_AL-NEIMA IMMOBILIERE · 00253-21356659 00253-21356289



butech

PORCELANOSA Grupo

UK - 1^a Ed. | 07/2022

Design and photography: butech Marketing Department

Edited by: butech building technology, S.A.U.

butech building technology, S.A.U.

Ctra. Villarreal - Puebla de Arenoso
(CV-20) Km 2,5. Villarreal (Spain)

+34 964 53 62 00

butech@butech.es

www.butech.net

The contents of this catalog are protected by Intellectual Property Law, Royal Decree 1 / 1996. Any reproduction of it, in whole or in part, without the consent of PORCELANOSA Grupo is liable under the Penal Code.

